


High-speed, High-tech, Profiling

Laser Sensor Innovations Improve Tyre Manufacturing

Tyre and rubber manufacturers are requiring inspection systems to detect small geometric defects wherever they occur on the rubber surface in both final and in-process inspection operations. To increase quality and improve product safety, these smaller areas of dimensional variation or defects must be detected with very high reliability.

To meet these expanding requirements, sensor manufacturers have developed new and very high speed laser line sensors, such as LMI Technologies' Selcom EyeCon product line, to acquire high density data to insure detection of the smallest defects. These high-speed laser line sensors generate masses of data, requiring a reliable communications network easily implemented by machine builders, without the cost and risk of developing custom communications links. Simplicity of implementation benefits end users with high reliability, low cost and minimum maintenance.

In tyre manufacturing, multiple sensors are often implemented in a single station to cover the full surface of the product with high resolution. This adds

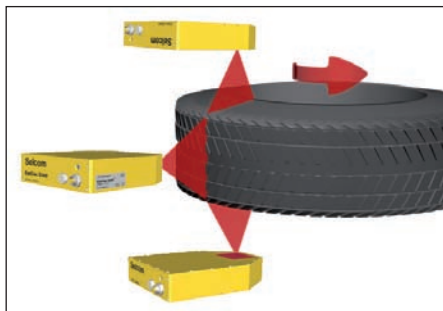


In a typical tyre final inspection system one laser line sensor is inspecting each sidewall and a third one is inspecting the tread

further complexity requiring tight synchronization of data from all sensors and encoders. The issue has been resolved by development of a unique platform, providing microsecond synchronization between sensors, and assembling data from all sensors into a single 3D profile map, output to the host over a single Gigabit Ethernet cable.

Communication via GigE

A typical inspection application may use multiple laser sensors inspecting different zones of the product, such as calendared rubber, conveyor belts or tread extrusions. An in-process profiling application may use eight or more sensors (half of them above and the other half below the conveyor) to provide high data density across the full width of the extrusion.

The massive amount of data generated in these applications must be sent to the inspection station's host computer for analyses. For convenient layout of inspection stations, and to simplify the task of the system integrator, it is desirable for the host computer to be remotely located, often at a significant distance from the sensors. Gigabit Ethernet (GigE), broadly used and easy to apply and implement, provides the optimal communi-

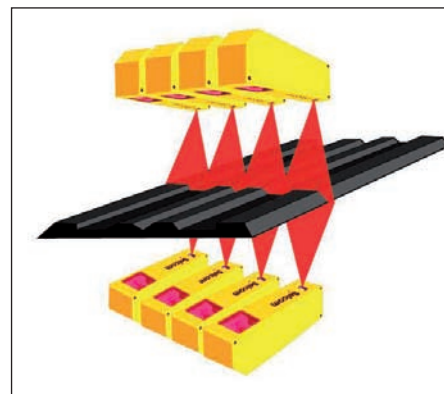

Eight sensors are used for the in-process profiling application to provide high data density across the full width of the extrusion

cations standard. It provides data rates up to 1,000 Mbps, with inexpensive cables running up to 100 m without repeaters.

Total Integration Architecture

Implementing multiple laser line sensors to cover the full surface of the object creates challenges of synchronizing data from all sensors, and stitching multi-sensor data streams into a single file, without requiring the integrator to carry out these complex operations in the host computer. Synchronization insures that data from each sensor is obtained at essentially the same point in time. Otherwise, each sensors data will come from a different position along the length of the surface. Stitching involves combining the synchronized profiles from each sensor into a single 3D surface map, transmitted as a single data file to the host.

To simplify the tasks of synchronization and stitching for the system integrator, LMI has developed the FireSync platform. This platform is designed to accept and integrate data from multiple vision sensors, as well as other local inputs such as encoders and photocells.

This approach simplifies data analyses in the host computer, because profiles output by all sensors are tightly synchronized within the sensor system itself. Each "slice" of data from all sensors is combined into a single complete 3D data file, sent from the platform over a single GigE output cable to the host computer. This total integration architecture simplifies installation.

The platform also provides tools for multi-sensor position calibration using an appropriate artifact of known dimensions that is placed in the system measuring area. This process locates each sensor's position with respect to a global coordinate system defined relative to the target. Transformation parameters for each sensor in the system are acquired during the system calibration

process and are used to transform profile data from the multiple sensors into a single coordinate system.

Tyre Final Inspection

Typical tyre final inspection systems use three high-speed laser line sensors, one inspecting each sidewall and the third inspecting the tread. Each sensor measures hundreds of points along the laser line, at frame rates of 4 kHz or faster. The FireSync platform provides synchronization and stitching functions for the three sensors. The application is complicated further by the need for analyses software to remove or filter out all points that relate to raised lettering, bar codes and other acceptable variations in the surface. The sensors employ "dual triangulation" with two cameras viewing the laser line, one on either side of the laser projector. This design eliminates data dropouts caused by shadowing of the laser beam at the edges of raised material on the sidewall surface.

Simplified Integration – Maximized Reliability

Today's high-speed laser line sensors provide high-density data to detect and quantify defects and dimensional variations in both in-process and final inspection applications in high volume tyre manufacturing. Synchronization and communications issues are simplified by the FireSync platform, with communications to the host computer on a single Gigabit Ethernet cable. The platform is designed to simplify the tasks of system integration, and maximizes reliability for the end user.

► Authors

Dr. Walter Pastorius, Technical Marketing Adviser LMI Technologies Inc.
Martin Sanden, Market Manager Rubber and Tire LMI Technologies BV

► Contact

LMI Technologies, Windsor, Canada
Tel.: +1 519 945 6373
Fax: +1 519 945 1467
info@lmitechnologies.com
www.lmitechnologies.com

Besuchen Sie uns auf der
Control 2010
Halle 1, Stand 1637
in Stuttgart



Sirius Advanced Cybernetics GmbH

SAC macht's möglich!

Wir sind Ihr Lösungspartner für die 100 % Kontrolle Ihrer Produkte auf Maßhaltigkeit, Oberflächenzustand, Beschaffenheit und korrekte Montage! SAC steht seit Jahrzehnten für qualifizierte Beratung und Projektentwicklung weltweit.

Fragen Sie uns, wir beraten Sie gerne!

Entdecken Sie Ihre Perspektiven in der Qualitätssicherung!



www.sac-vision.de | Fon +49 (0) 721 60 543-000 | sales@sac-vision.de



Berührungslose Lasermessung in der Reifen- und Gummiindustrie mit OPTImess

- Dickenmessung
- Laufstreifenmessung
- 3D Reifengeometrievermessung
- Profilmessung
- Wulst-zu-Wulst-Messung
- Runout-Messung

Dr. D. Wehrhahn
Meßsysteme für die Qualitätssicherung

Hildesheimer Straße 140 Fon +49 511 51 26 65 Mail info@drwehrhahn.de
D-30173 Hannover Fax +49 511 52 21 52 Web www.drwehrhahn.de

Besuchen Sie uns auf der Control 2010, Stand 1841

VMT FINDS THEM ALL ...



VMT vision and laser sensor systems

As a turn-key system supplier, we ensure the economic integration of vision systems in your facilities or production processes. VMT solutions are based on our own self-developed product lines which cover the entire applications spectrum.

As competence center for vision solutions in the Pepperl+Fuchs group, VMT offers absolute high-level technology combined with highest investment security. Increase your customer's satisfaction with effective and automated quality assurance and keep your market opportunities!

VMT Vision Machine Technic Bildverarbeitungssysteme GmbH
A company of the Pepperl+Fuchs Group
Mallaustraße 50-56 • 68219 Mannheim/Germany
Phone: +49 621 84250-0 • Fax: +49 621 84250-290
E-Mail: info@vmt-gmbh.com • www.vmt-gmbh.com



We exhibit at: AUTOMATICA · Hall A2 · Booth 310