



Gocator® 2490

3D SMART LASER LINE PROFILE SENSOR

- 2 m field of view and large measurement range provide scan area of 1 m × 1 m at 800 Hz
- 2.5 mm XYZ resolution for complete dimensional measurement (W×H×D) at conveyor speeds of 2 m/s
- Built-in measurement tools and PLC interfaces result in lower total system cost


Gocator® 2490 is designed to scan large targets in packaging & logistics, automotive manufacturing, and food processing applications. The sensor leverages an ultra-wide field of view and large measurement range to achieve an extensive scan area, allowing engineers to perform complete dimensional gauging and high-resolution 2D/3D quality inspection of large targets at inline production speed.

HIGH-RESOLUTION 3D SCANNING AT PRODUCTION SPEED


For packaging & logistics applications, the 2-megapixel imager allows Gocator 2490 to scan and measure 1 m × 1 m packages at a rate of 800 Hz and resolutions of 2.5 mm in all three dimensions, even at conveyor speeds of 2 m/s. Competing systems typically offer just 3-5 mm resolution in the X, Y, and Z axes.

LARGE SCAN AREA


The combination of wide field of view and large measurement range enables engineers to cover a scan area up to 1 m × 2 m for handling a variety of large targets (e.g., automotive body frame inspection and transverse board scanning). In addition, high Z resolution (for height measurement) makes the 2490 well suited to applications such as food quality control and optimization.

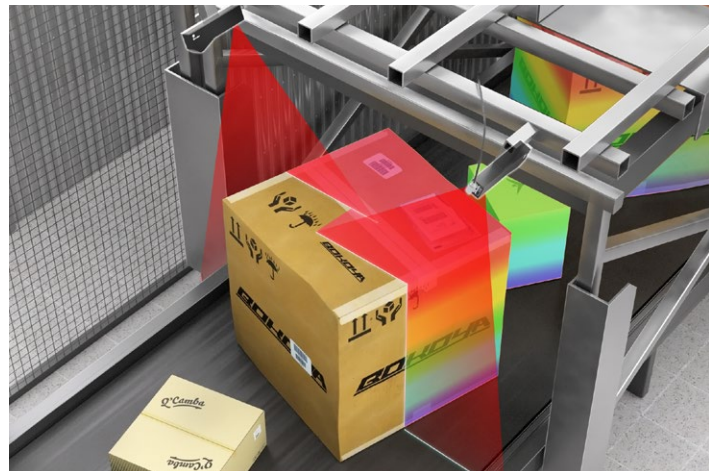


Package volume measurement and sorting

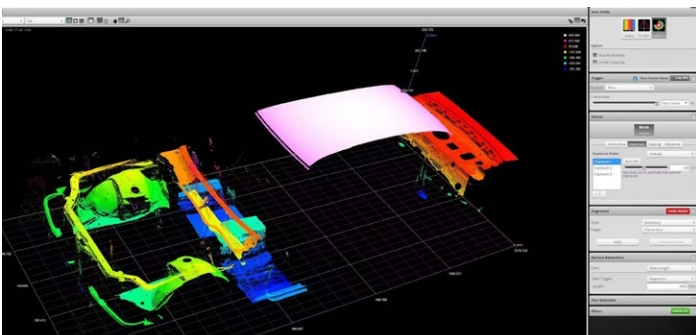

Single 2490 scan of a car body frame




Depalletization

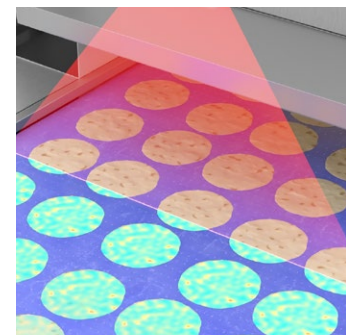

Baking quality control

GOCATOR 2490

| | |
|--|--|
| Data Points / Profile | 1920 |
| Resolution X (mm) (Profile Data Interval) | 0.25 - 1.1 |
| Linearity Z (+/- % of MR) | 0.04% |
| Repeatability Z (μm) | 12 |
| Clearance Distance (CD) (mm) | 350 |
| Measurement Range (MR) (mm) | 1525 |
| Field of View (FOV) (mm) | 390 - 2000 |
| Laser Class | 2, 3R |
| Dimensions (mm) | 49x85x272 |
| Weight (kg) | 1.5 |
| Scan Rate | 370 Hz (full view), 800 Hz (configured for 1 m x 1 m field of view) to 5000 Hz |
| Interface | Gigabit Ethernet |
| Inputs | Differential Encoder, Laser Safety Enable, Trigger |
| Outputs | 2x Digital output, RS-485 Serial (115 kBaud), 1x Analog Output (4 - 20 mA) |
| Input Voltage (Power) | +24 to +48 VDC (13 Watts); Ripple +/- 10% |
| Housing | Gasketed aluminum enclosure, IP67 |
| Operating Temperature | 0 to 50°C |
| Storage Temperature | -30 to 70°C |
| Vibration Resistance | 10 to 55 Hz, 1.5 mm double amplitude in X, Y, and Z directions, 2 hours per direction |
| Shock Resistance | 15 g, half sine wave, 11 ms, positive and negative for X, Y, and Z directions |
| Scanning Software | Browser-based GUI and open source SDK for configuration and real-time 3D visualization. Open source SDK, native drivers, and industrial protocols for integration with user applications, third-party image processing applications, and PLCs. |

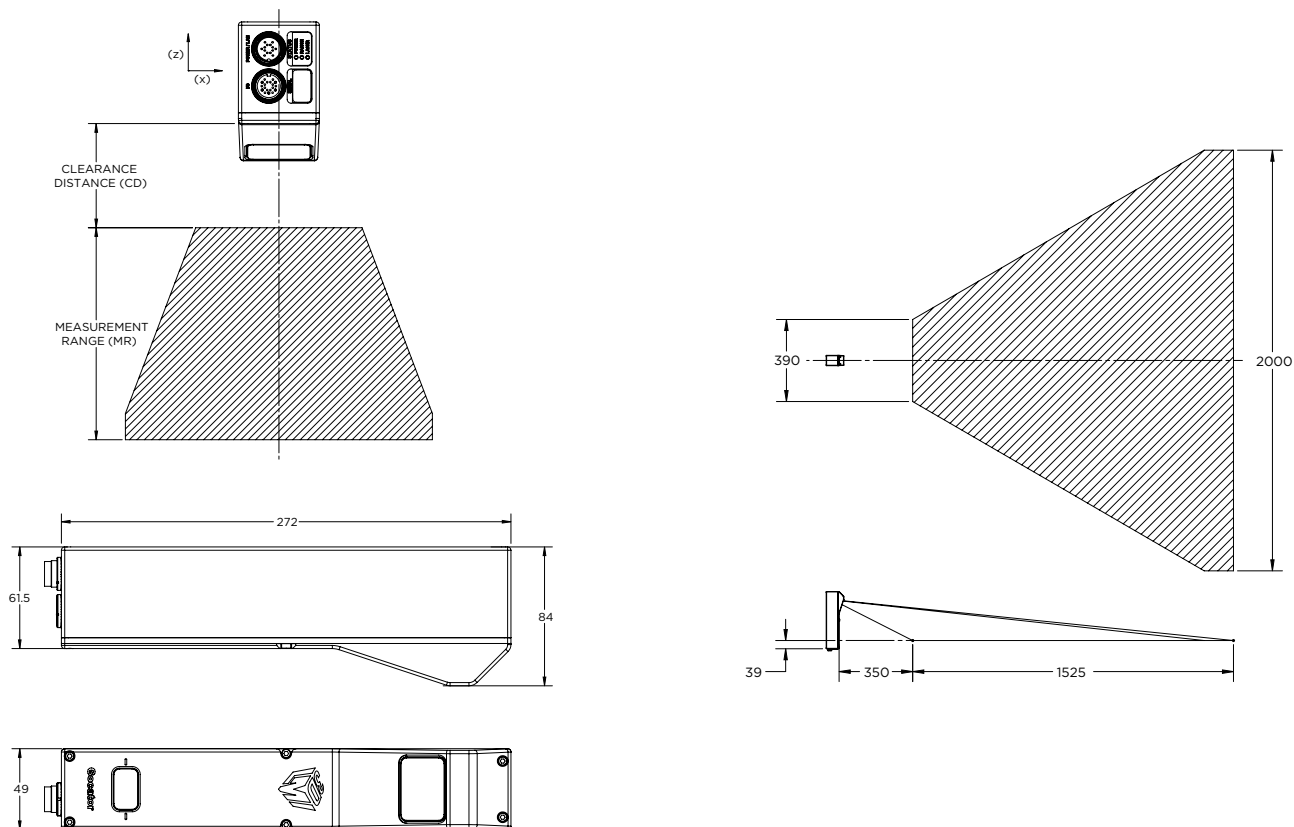

AMERICAS

LMI Technologies Inc.
Burnaby, BC, Canada

LMI Technologies has sales offices and distributors worldwide. All contact information is listed at lmi3d.com/contact

EMEAR

LMI Technologies GmbH
Teltow/Berlin, Germany

ASIA PACIFIC

LMI (Shanghai) Trading Co., Ltd.
Shanghai, China

