


NOTES - UNLESS OTHERWISE SPECIFIED	
1	DEBURR AND BREAK ALL SHARP EDGES
2	**ENGRAVING/ETCHING:** FONT TYPE = ARIAL, REGULAR HEIGHT = 3mm MAX DEPTH = 0.1mm MAX REPLACE "SS" WITH VENDOR ID, AS PER PO
3	ALL HOLE DIMENSIONS ±0.1mm UNLESS OTHERWISE NOTED
4	ALL DIMENSIONS ARE POST ANODIZING

REVISION (ONLY LAST REV REQUIRED)				
ZONE	VER REV	DESCRIPTION	DATE (YYYY-MM-DD)	REVISED BY
A8	01 02	CHANGED FINISH AND ADDED 1/4-20 UNC THREADED HOLE	2025-10-30	LMETCALF

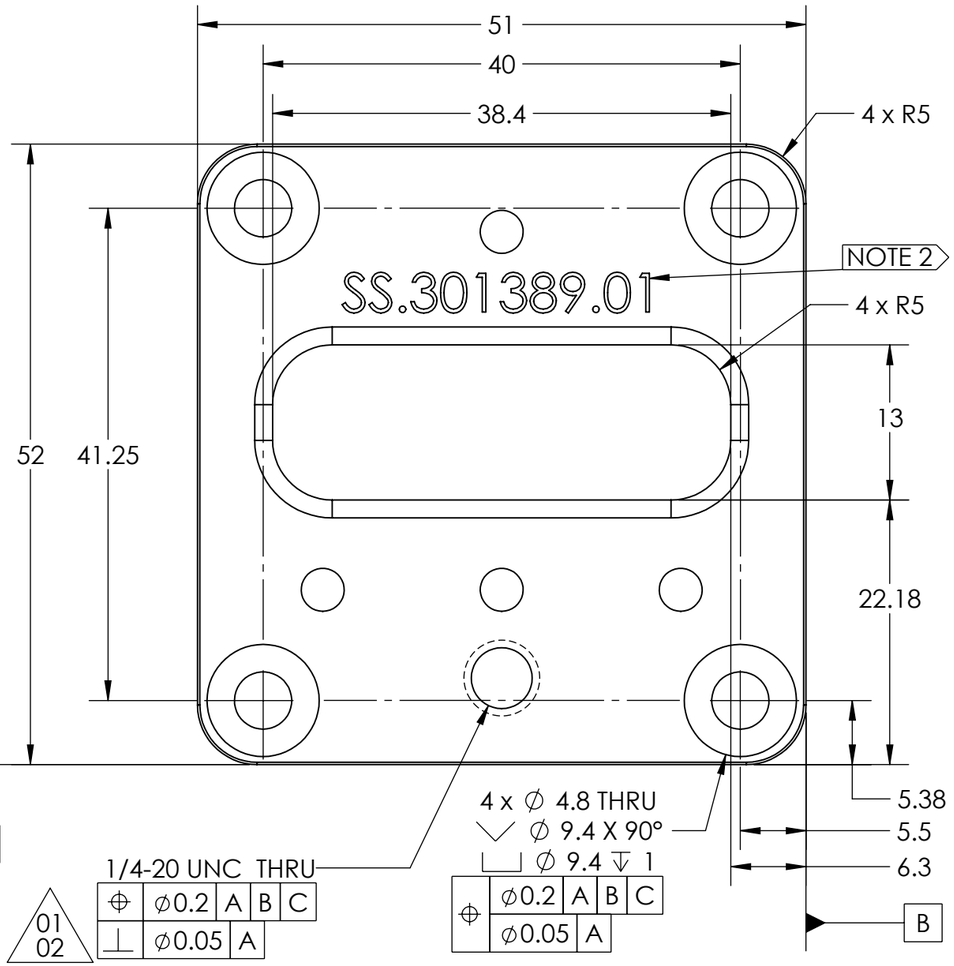

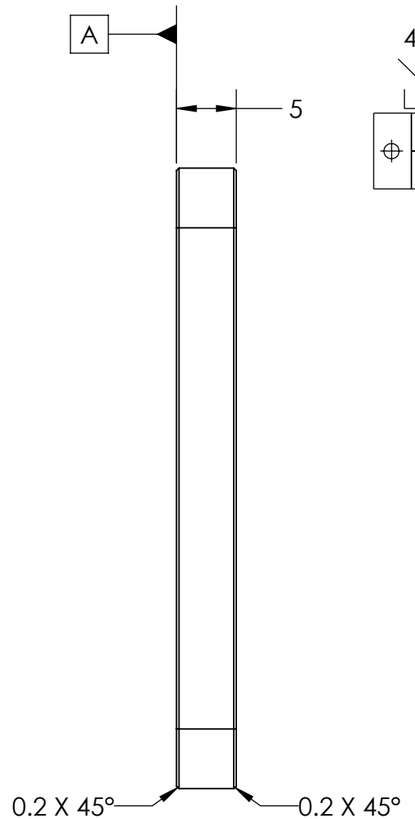

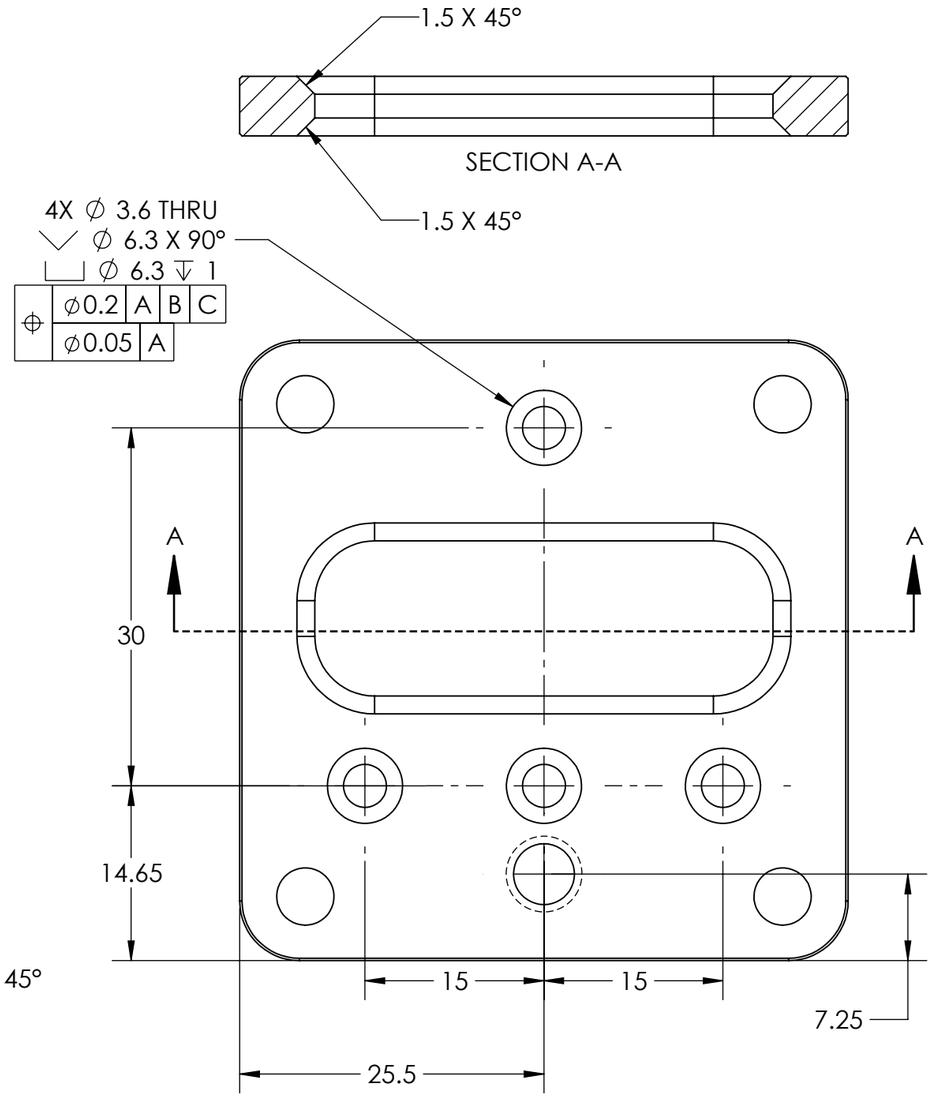

01
02

www.lmi3D.com	**PROPRIETARY AND CONFIDENTIAL** THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LMI TECHNOLOGIES INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LMI TECHNOLOGIES INC IS PROHIBITED.	THIRD ANGLE PROJECTION	UNLESS SPECIFIED ALL MACHINED SURFACES TO BE 3.2 INTERPRET ALL GD&T PER ASME Y14.5 - 2009 MATERIALS MUST BE ROHS COMPLIANT	MATERIAL: ALUMINUM 6061-T6 ANODIZE: BLACK MIL-A-8625 TYPE II, CLASS 2	UNLESS OTHERWISE SPECIFIED ALL SURFACES TO BE ⌓ 0.4 A B C ALL UNTOLERANCED DIMENSIONS ARE BASIC TEMPLATE-23081.01.05 | SCALE: 2:1 | SHEET 1 OF 1	ALL DIMENSIONS ARE METRIC		DESCRIPTION **MOUNTING PLATE, Gocator 2D Base**
						NAME	YYYY-MM-DD	
					DESIGN:	ITHAYALASINGHAM	2025-06-24	
					DRAWN:	ITHAYALASINGHAM	2025-06-24	

PART NUMBER	VERSION	REVISION	SIZE
301389	**01**	**02**	**B**