

NOTES - UNLESS OTHERWISE SPECIFIED	
1	DEBURR AND BREAK ALL SHARP EDGES
2	**ENGRAVING/ETCHING:** FONT TYPE = ARIAL, REGULAR HEIGHT = 3mm MAX DEPTH = 0.1mm MAX REPLACE "SS" WITH VENDOR ID, AS PER PO
3	ALL DIMENSIONS ARE POST ANODIZING
4	ALL HOLE DIMENSIONS +/-0.1mm UNLESS OTHERWISE NOTED

REVISION (ONLY LAST REV REQUIRED)					
LAST ECO	ZONE	VER REV	DESCRIPTION	DATE (YYYY-MM-DD)	REVISED BY
		01 01	INITIAL RELEASE	2025-11-27	TTHAYALASINGHAM



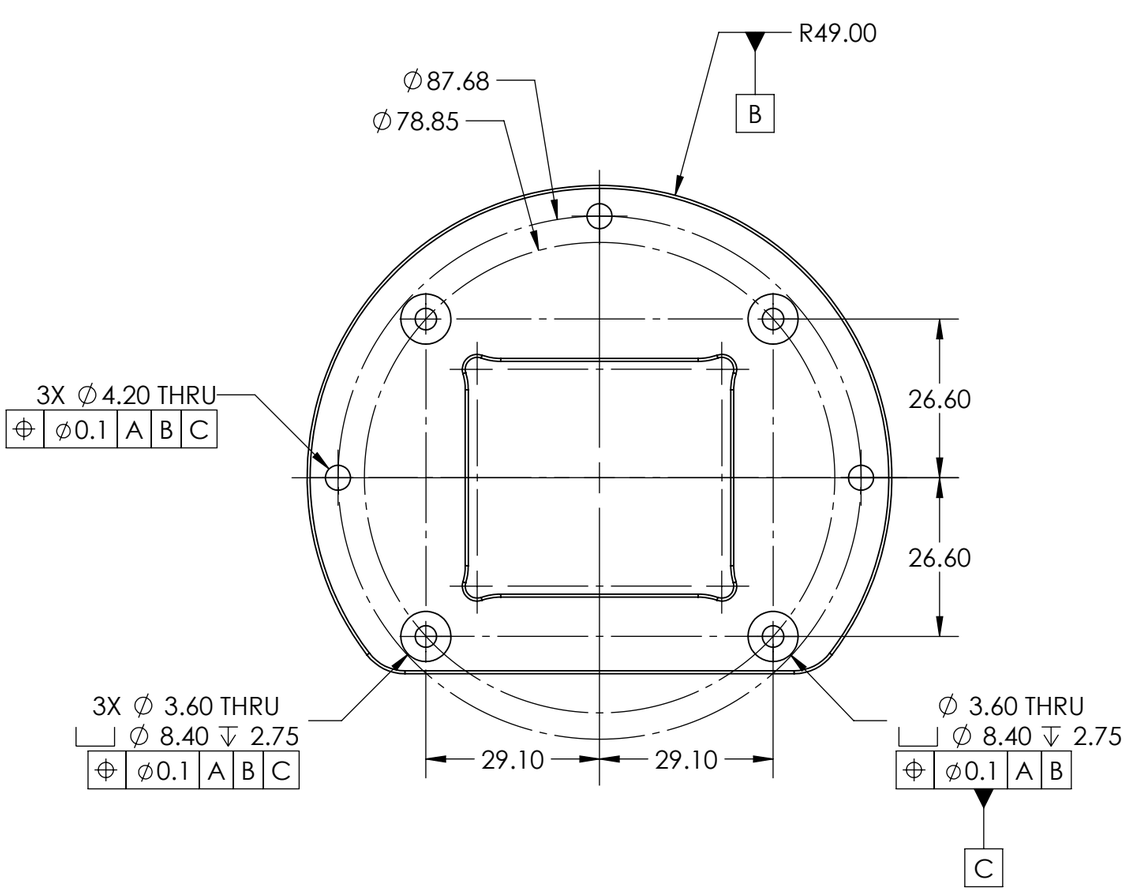

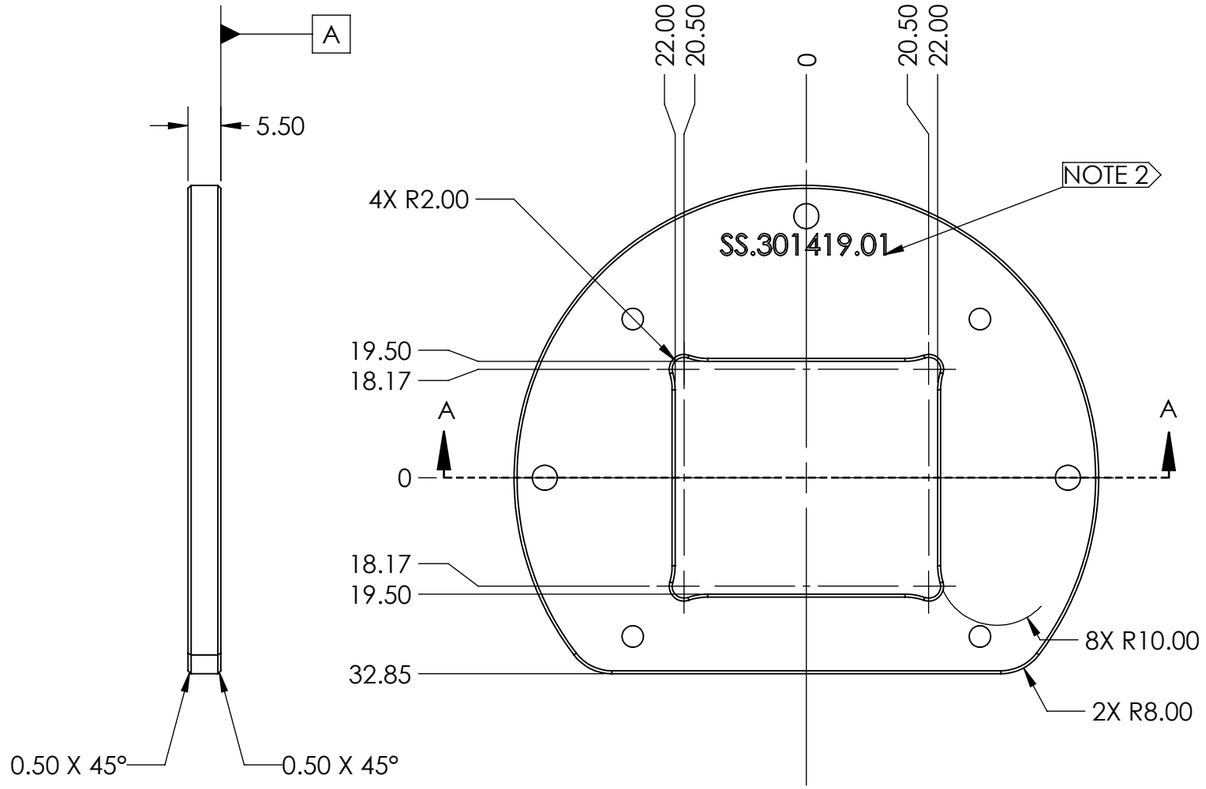

www.lmi3D.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LMI TECHNOLOGIES INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LMI TECHNOLOGIES INC IS PROHIBITED.

THIRD ANGLE PROJECTION

UNLESS SPECIFIED ALL MACHINED SURFACES TO BE 3.2

INTERPRET ALL GD&T PER ASME Y14.5 - 2009

MATERIALS MUST BE ROHS COMPLIANT

MATERIAL: ALUMINUM 6061-T6

FINISH: AS MACHINED

ANODIZE: BLACK

MIL-A-8625 TYPE II, CLASS 2

UNLESS OTHERWISE SPECIFIED ALL SURFACES TO BE ⌓ 0.4 A B C

ALL UNTOLERANCED DIMENSIONS ARE BASIC

TEMPLATE-23081.01.05 | SCALE: 1:1 | SHEET 1 OF 1

ALL DIMENSIONS ARE METRIC

	NAME	YYYY-MM-DD
DESIGN:	TTHAYALASINGHAM	2025-11-26
DRAWN:	TTHAYALASINGHAM	2025-11-26

DESCRIPTION
MOUNTING PLATE, Ring Light, Gocator 2D, Without Lens Cover

PART NUMBER	VERSION	REVISION	SIZE
301419	**01**	**01**	**B**