USER MANUAL

Gocator Laser Profile Sensors

2100, 2300, 2400 & 2880 Series

Firmware version: 4.4.x.xx

Document revision: E

Copyright

Copyright © 2016 by LMI Technologies, Inc. All rights reserved.

Proprietary

This document, submitted in confidence, contains proprietary information which shall not be reproduced or transferred to other documents or disclosed to others or used for manufacturing or any other purpose without prior written permission of LMI Technologies Inc.

No part of this publication may be copied, photocopied, reproduced, transmitted, transcribed, or reduced to any electronic medium or machine readable form without prior written consent of LMI Technologies, Inc.

Trademarks and Restrictions

Gocator™ is a registered trademark of LMI Technologies, Inc. Any other company or product names mentioned herein may be trademarks of their respective owners.

Information contained within this manual is subject to change.

This product is designated for use solely as a component and as such it does not comply with the standards relating to laser products specified in U.S. FDA CFR Title 21 Part 1040.

Contact Information

For more information, please contact LMI Technologies.

LMI Technologies, Inc. 1673 Cliveden Ave.
Delta, BC V3M 6V5
Canada

Telephone: +1 604 636 1011
Facsimile: +1 604 516 8368

www.lmi3D.com

Table of Contents

Copyright **2**
Table of Contents **3**
Introduction **10**
Safety and Maintenance **11**
Laser Safety 11
Laser Classes 12
Precautions and Responsibilities 13
Class 3B Responsibilities 13
Nominal Ocular Hazard Distance (NOHD) 14
Systems Sold or Used in the USA 15
Electrical Safety 15
Handling, Cleaning, and Maintenance 16
Environment and Lighting 16
Getting Started **18**
System Overview 18
Standalone System 18
Dual-Sensor System 18
Multi-Sensor System 19
Hardware Overview 21
Gocator Sensor 21
Gocator Cordsets 21
Master 100 22
Master 400/800 23
Master 1200/2400 23
Calibration Targets 24
Installation 26
Grounding - Gocator 26
Recommended Grounding Practices - Cordsets 26
Grounding - Master 400/800/1200/2400 27
Mounting 27
Orientations 28
Rut-Scanning System Setup 30
Layout 30
System Setup 31
Software Configuration 31
System Operation 32
Network Setup 33
Client Setup 33
Gocator Setup 35
Running a Standalone Sensor System 35
Running a Dual-Sensor System 36
Next Steps 39
How Gocator Works **41**
3D Acquisition 41
Clearance Distance, Field of View and Measurement Range 42
Resolution and Accuracy 43
X Resolution 43
Z Resolution 44
Z Linearity 44
Profile Output 46
Coordinate Systems 46
Sensor Coordinates 46
System Coordinates 47
Part and Section Coordinates 49
Switching between Coordinate Systems 50
Uniform Spacing (Data Resampling) 50
Data Generation and Processing 51
Surface Generation 51
Part Detection 52
Sectioning 52
Part Matching 53
Measurement and Anchoring 53
Output and Digital Tracking 54
Gocator Web Interface **55**
User Interface Overview 55
Toolbar 56
Creating, Saving and Loading Jobs (Settings) 56
Recording, Playback, and Measurement Simulation 58
Recording Filtering 60
Downloading, Uploading, and Exporting Replay Data 61
Log 63
Metrics Area 64
Data Viewer 64
System Management and Maintenance 65
Manage Page Overview 65
Sensor System 66
Sensor Autostart 66
System Layout 66
Buddy Assignment 68
Exposure Multiplexing 69

Over Temperature Protection 69
Networking 70
Motion and Alignment 70
Alignment Reference 71
Encoder Resolution 71
Encoder Value and Frequency 72
Travel Speed 72
Jobs 72
Security 74
Maintenance 75
Sensor Backups and Factory Reset 76
Firmware Upgrade 77
Support 78
Support Files 79
Manual Access 79
Software Development Kit 80
Scan Setup and Alignment 81
Scan Page Overview 81
Scan Modes 82
Triggers 83
Trigger Examples 85
Trigger Settings 86
Sensor 88
Active Area 88
Tracking Window 89
Transformations 91
Exposure 92
Single Exposure 93
Dynamic Exposure 94
Multiple Exposure 95
Spacing 96
Sub-Sampling 96
Spacing Interval 97
Material 98
Alignment 100
Alignment States 100
Alignment Types 100
Alignment: With and Without Encoder Calibration 101
Aligning Sensors 101
Clearing Alignment 104
Filters 104
Gap Filling 104
Median 105
Smoothing 106
Decimation 107
Surface Generation 107
Part Detection 111
Edge Filtering 114
Data Viewer 115
Data Viewer Controls 116
Video Mode 116
Exposure Information 116
Exposures 116
Overexposure and Underexposure 117
Spots and Dropouts 118
Profile Mode 119
Section Mode 121
Surface Mode 122
Height Map Color Scale 124
Region Definition 125
Intensity Output 126
Models 127
Model Page Overview 127
Part Matching 128
Using Edge Detection 129
Creating a Model 132
Modifying a Model's Edge Points 134
Adjusting Target Sensitivity 137
Setting the Match Acceptance Criteria 138
Running Part Matching 138
Using Bounding Box and Ellipse 138
Configuring a Bounding Box or an Ellipse 140
Running Part Matching 141
Using Part Matching to Accept or Reject a Part 142
Sections 142
Creating a Section 145
Deleting a Section 147
Measurement 148
Measure Page Overview 148
Data Viewer 149
Tools Panel 149
Adding and Configuring a Tool 149

Source 150
Streams (Sections) 151
Regions 151
Decisions 152
Filters 153
Measurement Anchoring 154
Enabling and Disabling Measurements 156
Editing a Tool or Measurement Name 158
Changing a Measurement ID 158
Removing a Tool 159
Profile Measurement 159
Feature Points 159
Fit Lines 161
Measurement Tools 162
Area 162
Bounding Box 164
Bridge Value 166
Circle 168
Dimension 169
Groove 171
Intersect 175
Line 177
Panel 178
Position 180
Strip 181
Tilt 185
Script 185
Surface Measurement 186
Measurement Tools 187
Bounding Box 187
Countersunk Hole 191
Dimension 196
Ellipse 200
Hole 202
Measurement Region 206
Opening 206
Measurement Region 213
Plane 213
Position 216
Stud 218
Measurement Region 221
Volume 221
Script 223
Script Measurement 224
Built-in Functions 224
Output 229
Output Page Overview 229
Ethernet Output 230
Digital Output 233
Analog Output 236
Serial Output 238
Dashboard 241
Dashboard Page Overview 241
System Panel 241
Measurements 242
Gocator Emulator 244
Limitations 244
Downloading a Support File 245
Running the Emulator 245
Adding a Scenario to the Emulator 246
Running a Scenario 247
Removing a Scenario from the Emulator 248
Using Replay Protection 248
Stopping and Restarting the Emulator 249
Working with Jobs and Data 249
Creating, Saving, and Loading Jobs 249
Playback and Measurement Simulation 250
Downloading, Uploading, and Exporting Replay Data 251
Downloading and Uploading Jobs 253
Scan, Model, and Measurement Settings 255
Calculating Potential Maximum Frame Rate 255
Protocol Output 256
Gocator Device Files 256
Live Files 256
Log File 257
Job Files 257
Job File Components 258
Accessing Files and Components 258
Configuration 258
Setup 259
Filters 260
XSmoothing 260
YSmoothing 260

XGapFilling ... 261
YGapFilling ... 261
XMedian ... 261
YMedian ... 261
XDecimation ... 261
YDecimation ... 262
Trigger ... 262
Layout ... 263
Alignment ... 264
Disk ... 264
Bar ... 265
Plate ... 265
Devices / Device ... 265
Tracking ... 267
Material ... 267
SurfaceGeneration ... 269
FixedLength ... 269
VariableLength ... 270
Rotational ... 270
SurfaceSections ... 270
ProfileGeneration ... 271
FixedLength ... 271
VariableLength ... 271
Rotational ... 272
PartDetection ... 272
EdgeFiltering ... 273
PartMatching ... 273
Edge ... 274
BoundingBox ... 274
Ellipse ... 274
Replay ... 275
RecordingFiltering ... 275
Conditions/AnyMeasurement ... 275
Conditions/AnyData ... 275
Conditions/Measurement ... 276
Streams/Stream (Read-only) ... 276
ToolOptions ... 277
MeasurementOptions ... 277
StreamOption ... 277
Tools ... 278
Profile Types ... 278
ProfileFeature ... 278
ProfileLine ... 278
ProfileRegion2d ... 279
Surface Types ... 279
Region3D ... 279
SurfaceFeature ... 279
SurfaceRegion2d ... 280
ProfileArea ... 280
ProfileBoundingBox ... 281
ProfileBridgeValue ... 283
ProfileCircle ... 284
ProfileDimension ... 286
ProfileGroove ... 287
ProfileIntersect ... 289
ProfileLine ... 290
ProfilePanel ... 292
ProfilePosition ... 294
ProfileStrip ... 295
Script ... 297
SurfaceBoundingBox ... 298
SurfaceCsHole ... 299
SurfaceDimension ... 302
SurfaceEllipse ... 303
SurfaceHole ... 305
SurfaceOpening ... 307
SurfacePlane ... 309
SurfacePosition ... 311
SurfaceStud ... 312
SurfaceVolume ... 314
Output ... 315
Ethernet ... 316
Ascii ... 318
EIP ... 318
Modbus ... 318
Digital0 and Digital1 ... 318
Analog ... 319
Serial ... 320
Selcom ... 321
Ascii ... 321
Transform ... 321
Device ... 322
Part Models ... 323
Edge Points ... 324

Configuration ... 324
Protocols ... **326**
Gocator Protocol ... 326
Data Types ... 327
Commands ... 327
Discovery Commands ... 328
Get Address ... 328
Set Address ... 329
Get Info ... 330
Control Commands ... 331
Protocol Version ... 332
Get Address ... 332
Set Address ... 333
Get System Info ... 333
Get States ... 334
Log In/Out ... 335
Change Password ... 336
Set Buddy ... 336
List Files ... 337
Copy File ... 337
Read File ... 338
Write File ... 338
Delete File ... 339
Get Default Job ... 339
Set Default Job ... 340
Get Loaded Job ... 340
Get Alignment Reference ... 341
Set Alignment Reference ... 341
Clear Alignment ... 341
Get Timestamp ... 342
Get Encoder ... 342
Reset Encoder ... 342
Start ... 343
Scheduled Start ... 343
Stop ... 344
Get Auto Start Enabled ... 344
Set Auto Start Enabled ... 344
Start Alignment ... 345
Start Exposure Auto-set ... 345
Software Trigger ... 346
Schedule Digital Output ... 346
Schedule Analog Output ... 347
Ping ... 347
Reset ... 348
Backup ... 348
Restore ... 349
Restore Factory ... 349
Get Recording Enabled ... 350
Set Recording Enabled ... 350
Clear Replay Data ... 351
Get Playback Source ... 351
Set Playback Source ... 351
Simulate ... 352
Seek Playback ... 352
Step Playback ... 353
Playback Position ... 353
Clear Measurement Stats ... 354
Clear Log ... 354
Simulate Unaligned ... 354
Acquire ... 355
Acquire Unaligned ... 355
Create Model ... 355
Detect Edges ... 356
Add Tool ... 356
Add Measurement ... 356
Read File (Progressive) ... 357
Export CSV (Progressive) ... 358
Export Bitmap (Progressive) ... 359
Upgrade Commands ... 359
Start Upgrade ... 360
Start Upgrade Extended ... 360
Get Upgrade Status ... 361
Get Upgrade Log ... 361
Results ... 361
Data Results ... 362
Stamp ... 362
Video ... 363
Profile ... 364
Resampled Profile ... 364
Profile Intensity ... 365
Surface ... 365
Surface Intensity ... 366
Surface Section ... 367
Surface Section Intensity ... 367

Measurement 368
Operation Result 369
Exposure Calibration Result 369
Edge Match Result 370
Bounding Box Match Result 370
Ellipse Match Result 370
Health Results 371
Modbus Protocol 376
Concepts 376
Messages 376
Registers 377
Control Registers 378
Output Registers 379
State 379
Stamp 379
Measurement Registers 380
EtherNet/IP Protocol 382
Concepts 382
Basic Object 383
Identity Object (Class 0x01) 383
TCP/IP Object (Class 0xF5) 383
Ethernet Link Object (Class 0xF6) 383
Assembly Object (Class 0x04) 384
Command Assembly 384
Sensor State Assembly 385
Sample State Assembly 386
ASCII Protocol 388
Connection Settings 388
Ethernet Communication 388
Serial Communication 388
Polling Operation Commands (Ethernet Only) 389
Command and Reply Format 389
Special Characters 390
Control Commands 390
Start 390
Stop 391
Trigger 391
LoadJob 391
Stamp 392
Stationary Alignment 392
Moving Alignment 393
Clear Alignment 393
Data Commands 393
Result 394
Value 394
Decision 395
Health Commands 396
Health 396
Standard Result Format 396
Custom Result Format 397
Selcom Protocol 398
Serial Communication 398
Connection Settings 398
Message Format 398
Software Development Kit 400
Setup and Locations 400
Class Reference 400
Examples 401
Sample Project Environment Variable 401
Header Files 401
Class Hierarchy 401
GoSystem 402
GoSensor 402
GoSetup 402
GoLayout 402
GoTools 402
GoTransform 402
GoOutput 402
Data Types 402
Value Types 403
Output Types 403
GoDataSet Type 404
Measurement Values and Decisions 404
Operation Workflow 405
Initialize GoSdk API Object 406
Discover Sensors 406
Connect Sensors 406
Configure Sensors 406
Enable Data Channels 407
Perform Operations 407
Limiting Flash Memory Write Operations 408
Tools and Native Drivers 410
Sensor Recovery Tool 410
GenTL Driver 412

16-bit RGB Image ... 416
16-bit Grey Scale Image ... 417
Registers ... 419
XML Settings File ... 420
Interfacing with Halcon ... 420
Setting Up Halcon ... 421
Halcon Procedures ... 424
Generating Halcon Acquisition Code ... 427
CSV Converter Tool ... 429
Troubleshooting ... 431
Specifications ... 433
Gocator 2100 & 2300 Series ... 434
Gocator 2320 ... 436
Gocator 2130 and 2330 ... 437
Gocator 2140 and 2340 ... 439
Gocator 2342 ... 440
Gocator 2150 and 2350 ... 442
Gocator 2170 and 2370 ... 444
Gocator 2375 ... 447
Gocator 2180 and 2380 ... 449
Gocator 2400 Series ... 452
Gocator 2410 ... 454
Gocator 2420 ... 457
Gocator 2880 Sensor ... 460
Gocator 2880 ... 461
Gocator Power/LAN Connector ... 463
Grounding Shield ... 463
Power ... 464
Laser Safety Input ... 464
Gocator I/O Connector ... 465
Grounding Shield ... 465
Digital Outputs ... 465
Inverting Outputs ... 466
Digital Inputs ... 466
Encoder Input ... 467
Serial Output ... 468
Analog Output ... 468
Master 100 ... 469
Master 100 Dimensions ... 470
Master 400/800 ... 471
Master 400/800 Electrical Specifications ... 472
Master 400/800 Dimensions ... 473
Master 1200/2400 ... 474
Master 1200/2400 Electrical Specifications ... 475
Master 1200/2400 Dimensions ... 476
Accessories ... 477
Return Policy ... 479
Software Licenses ... 480
Support ... 486
Contact ... 487

Introduction

Gocator laser profile sensors are designed for 3D measurement and control applications. Gocator sensors are configured using a web browser and can be connected to a variety of input and output devices.

This documentation describes how to connect, configure, and use a Gocator. It also contains reference information on the device's protocols and job files. The documentation applies to the following sensors:

- Gocator 2100 series
- Gocator 2300 series
- Gocator 2400 series
- Gocator 2880

	B series Gocator sensors are only supported by firmware version 4.3 or later.

Notational Conventions

This documentation uses the following notational conventions:

⚠	Follow these safety guidelines to avoid potential injury or property damage.

	Consider this information in order to make best use of the product.


Safety and Maintenance

The following sections describe the safe use and maintenance of Gocator sensors.

Laser Safety

Gocator sensors contain semiconductor lasers that emit visible or invisible light and are designated as Class 2M, Class 3R, or Class 3B, depending on the chosen laser option. See *Laser Classes* on the next page for more information on the laser classes used in Gocator sensors.

Gocator sensors are referred to as *components*, indicating that they are sold only to qualified customers for incorporation into their own equipment. These sensors do not incorporate safety items that the customer may be required to provide in their own equipment (e.g., remote interlocks, key control; refer to the references below for detailed information). As such, these sensors do not fully comply with the standards relating to laser products specified in IEC 60825-1 and FDA CFR Title 21 Part 1040.

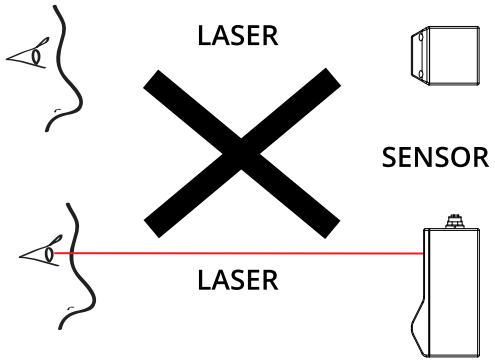

WARNING: DO NOT LOOK DIRECTLY INTO THE LASER BEAM

⚠ Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

References


1. *International standard IEC 60825-1 (2001-08) consolidated edition*, Safety of laser products – Part 1: Equipment classification, requirements and user's guide.
2. *Technical report 60825-10*, Safety of laser products – Part 10. Application guidelines and explanatory notes to IEC 60825-1.
3. *Laser Notice No. 50*, FDA and CDRH http://www.fda.gov/cdrh/rad-health.html

Laser Classes

Class 2M laser components


Class 2M laser components should not cause permanent damage to the eye under reasonably foreseeable conditions of operation, provided that:

- No optical aids are used (these could focus the beam).
- The user's blink reflex can terminate exposure (in under 0.25 seconds).
- Users do not need to look repeatedly at the beam or reflected light.
- Exposure is only accidental.

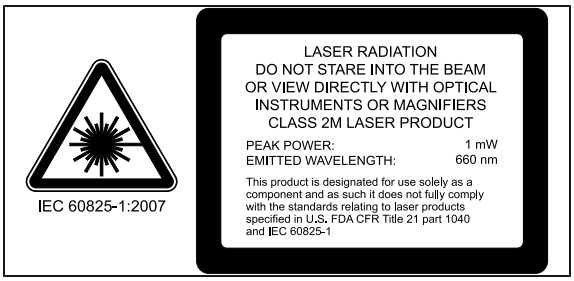

Class 3R laser components

Class 3R laser products emit radiation where direct intrabeam viewing is potentially hazardous, but the risk is lower with 3R lasers than for 3B lasers. Fewer manufacturing requirements and control measures for 3R laser users apply than for 3B lasers. Eye protection and protective clothing are not required. The laser beam must be terminated at the end of an appropriate path. Avoid unintentional reflections. Personnel must be trained in working with laser equipment.

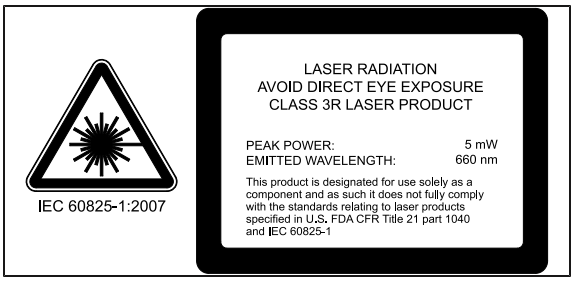

Class 3B laser components

Class 3B components are unsafe for eye exposure. Usually only eye protection is required. Protective gloves may also be used. Diffuse reflections are safe if viewed for less than 10 seconds at a minimum distance of 13 cm. There is a risk of fire if the beam encounters flammable materials. The laser area must be clearly identified. Use a key switch or other mechanism to prevent unauthorized use. Use a clearly visible indicator to show that a laser is in use, such as "Laser in operation." Restrict the laser beam to the working area. Ensure that there are no reflective surfaces in this area.





Labels reprinted here are examples only. For accurate specifications, refer to the label on your sensor.

For more information, see *Precautions and Responsibilities* below.

Precautions and Responsibilities

Precautions specified in IEC 60825-1 and FDA CFR Title 21 Part 1040 are as follows:

Requirement	Class 2M	Class 3R	Class 3B
Remote interlock	Not required	Not required	Required*
Key control	Not required	Not required	Required – cannot remove key when in use*
Power-on delays	Not required	Not required	Required*
Beam attenuator	Not required	Not required	Required*
Emission indicator	Not required	Not required	Required*
Warning signs	Not required	Not required	Required*
Beam path	Not required	Terminate beam at useful length	Terminate beam at useful length
Specular reflection	Not required	Prevent unintentional reflections	Prevent unintentional reflections
Eye protection	Not required	Not required	Required under special conditions
Laser safety officer	Not required	Not required	Required
Training	Not required	Required for operator and maintenance personnel	Required for operator and maintenance personnel

**LMI Class 3B laser components do not incorporate these laser safety items. These items must be added and completed by customers in their system design. For more information, see Class 3B Responsibilities below.*

Class 3B Responsibilities

LMI Technologies has filed reports with the FDA to assist customers in achieving certification of laser products. These reports can be referenced by an accession number, provided upon request. Detailed descriptions of the safety items that must be added to the system design are listed below.

Remote Interlock

A remote interlock connection must be present in Class 3B laser systems. This permits remote switches to be attached in serial with the keylock switch on the controls. The deactivation of any remote switches must prevent power from being supplied to any lasers.

Key Control

A key operated master control to the lasers is required that prevents any power from being supplied to the lasers while in the OFF position. The key can be removed in the OFF position but the switch must not allow the key to be removed from the lock while in the ON position.


Power-On Delays
A delay circuit is required that illuminates warning indicators for a short period of time before supplying power to the lasers.

Beam Attenuators
A permanently attached method of preventing human access to laser radiation other than switches, power connectors or key control must be employed.

Emission Indicator
It is required that the controls that operate the sensors incorporate a visible or audible indicator when power is applied and the lasers are operating. If the distance between the sensor and controls is more than 2 meters, or mounting of sensors intervenes with observation of these indicators, then a second power-on indicator should be mounted at some readily-observable position. When mounting the warning indicators, it is important not to mount them in a location that would require human exposure to the laser emissions. User must ensure that the emission indicator, if supplied by OEM, is visible when viewed through protective eyewear.

Warning Signs
Laser warning signs must be located in the vicinity of the sensor such that they will be readily observed.

Examples of laser warning signs are as follows:

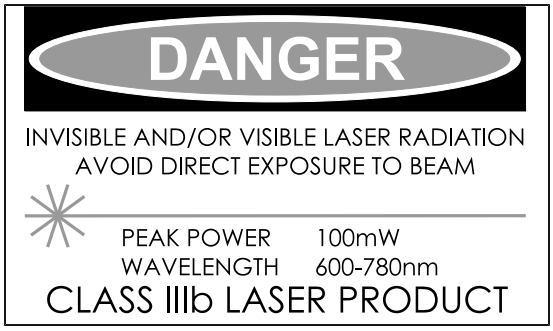

FDA warning sign example



IEC warning sign example

Nominal Ocular Hazard Distance (NOHD)

Nominal Ocular Hazard Distance (NOHD) is the distance from the source at which the intensity or the energy per surface unit becomes lower than the Maximum Permissible Exposure (MPE) on the cornea and on the skin.

⚠	The laser beam is considered dangerous if the operator is closer to the source than the NOHD.

The following table shows example calculations of the NOHD values for each Gocator model and laser class, assuming continuous operation of the laser. As a configurable device the Gocator, lets you set the laser exposure (laser on-time) independently of the frame period (total cycle time for data acquisition). Continuous operation of the laser means that the laser exposure is configured to be identical to the frame period, which is also referred to as 100% duty cycle. However, in many applications the laser exposure can be smaller than the frame period (less than 100% duty cycle) thereby reducing the NOHD. The table therefore shows the worst-case NOHD.

Model	Laser Class	Model Constant	Class I MPE (mW)	Class II MPE (mw)	Class I NOHD (mm)	Class II NOHD (mm)
2x20	2M	101	0.39	0.98	259	103
2x30	2M	101	0.39	0.98	259	103
	3R	351	0.39	0.98	900	358
	3B	2246	0.39	0.98	5759	2292
2x40	2M	101	0.39	0.98	259	103
	3R	351	0.39	0.98	900	358
	3B	2246	0.39	0.98	5759	2292
2x50	2M	101	0.39	0.98	259	103
	3R	351	0.39	0.98	900	358
	3B	2246	0.39	0.98	5759	2292
2x70	2M	98	0.39	0.98	251	100
	3R	341	0.39	0.98	875	348
	3B	1422	0.39	0.98	3645	1451
2x75	3B-N	8817	0.64		13777	
2x80	2M	95	0.39	0.98	245	97
	3R	335	0.39	0.98	859	342
	3B	1031	0.39	0.98	2645	1052

To calculate the NOHD value for a specific laser class, use the following formula:

NOHD = Model Constant / MPE

Model Constant includes a consideration of the fan angle for the individual models.

Systems Sold or Used in the USA

Systems that incorporate laser components or laser products manufactured by LMI Technologies require certification by the FDA.

Customers are responsible for achieving and maintaining this certification.

Customers are advised to obtain the information booklet *Regulations for the Administration and Enforcement of the Radiation Control for Health and Safety Act of 1968: HHS Publication FDA 88-8035*.

This publication, containing the full details of laser safety requirements, can be obtained directly from the FDA, or downloaded from their web site at http://www.fda.gov/cdrh.

Electrical Safety

⚠	Failure to follow the guidelines described in this section may result in electrical shock or equipment damage.

Sensors should be connected to earth ground
All sensors should be connected to earth ground through their housing. All sensors should be mounted on an earth grounded frame using electrically conductive hardware to ensure the housing of the sensor is connected to earth ground. Use a multi-meter to check the continuity between the sensor connector and earth ground to ensure a proper connection.

Minimize voltage potential between system ground and sensor ground
Care should be taken to minimize the voltage potential between system ground (ground reference for I/O signals) and sensor ground. This voltage potential can be determined by measuring the voltage between Analog_out- and system ground. The maximum permissible voltage potential is 12 V but should be kept below 10 V to avoid damage to the serial and encoder connections.

See *Gocator I/O Connector* on page 465 for a description of the connector pins.

Use a suitable power supply
The +24 to +48 VDC power supply used with Gocator sensors should be an isolated supply with inrush current protection or be able to handle a high capacitive load.

Use care when handling powered devices
Wires connecting to the sensor should not be handled while the sensor is powered. Doing so may cause electrical shock to the user or damage to the equipment.

Handling, Cleaning, and Maintenance



Dirty or damaged sensor windows (emitter or camera) can affect accuracy. Use caution when handling the sensor or cleaning the sensor's windows.

Keep sensor windows clean
Use dry, clean air to remove dust or other dirt particles. If dirt remains, clean the windows carefully with a soft, lint-free cloth and non-streaking glass cleaner or isopropyl alcohol. Ensure that no residue is left on the windows after cleaning.

Turn off lasers when not in use
LMI Technologies uses semiconductor lasers in 3D measurement sensors. To maximize the lifespan of the sensor, turn off the laser when not in use.

Avoid excessive modifications to files stored on the sensor
Settings for Gocator sensors are stored in flash memory inside the sensor. Flash memory has an expected lifetime of 100,000 writes. To maximize lifetime, avoid frequent or unnecessary file save operations.

Environment and Lighting

Avoid strong ambient light sources
The imager used in this product is highly sensitive to ambient light hence stray light may have adverse effects on measurement. Do not operate this device near windows or lighting fixtures that could influence measurement. If the unit must be installed in an environment with high ambient light levels, a lighting shield or similar device may need to be installed to prevent light from affecting measurement.

Avoid installing sensors in hazardous environments

To ensure reliable operation and to prevent damage to Gocator sensors, avoid installing the sensor in locations

- that are humid, dusty, or poorly ventilated;
- with a high temperature, such as places exposed to direct sunlight;
- where there are flammable or corrosive gases;
- where the unit may be directly subjected to harsh vibration or impact;
- where water, oil, or chemicals may splash onto the unit;
- where static electricity is easily generated.

Ensure that ambient conditions are within specifications

Gocator sensors are suitable for operation between 0–50° C and 25–85% relative humidity (non-condensing). Measurement error due to temperature is limited to 0.015% of full scale per degree C.

The Master 400/800/1200/2400 is similarly rated for operation between 0–50° C.

The storage temperature is -30–70° C.

⚠	The sensor must be heat-sunk through the frame it is mounted to. When a sensor is properly heat sunk, the difference between ambient temperature and the temperature reported in the sensor's health channel is less than 15° C.

⚠	Gocator sensors are high-accuracy devices, and the temperature of all of its components must therefore be in equilibrium. When the sensor is powered up, a warm-up time of at least one hour is required to reach a consistent spread of temperature in the sensor.

Getting Started


The following sections provide system and hardware overviews, in addition to installation and setup procedures.

System Overview

Gocator sensors can be installed and used in a variety of scenarios. Sensors can be connected as standalone devices, dual-sensor systems, or multi-sensor systems.

Standalone System

Standalone systems are typically used when only a single Gocator sensor is required. The sensor can be connected to a computer's Ethernet port for setup and can also be connected to devices such as encoders, photocells, or PLCs.

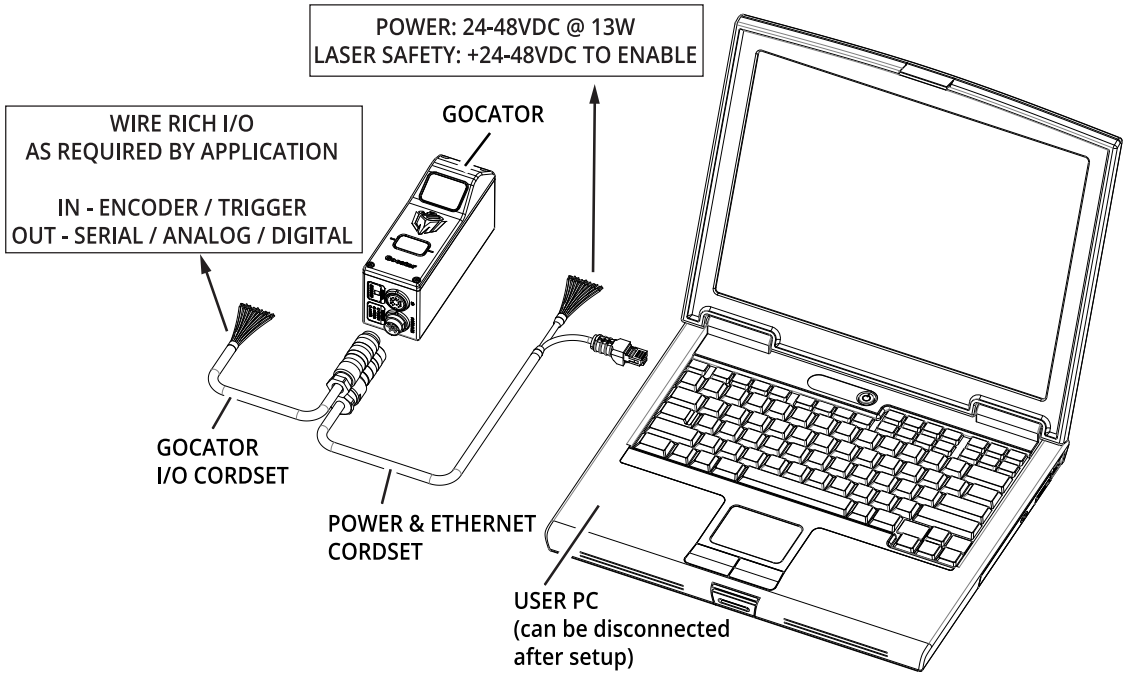


Dual-Sensor System

In a dual-sensor system, two Gocator sensors work together to perform profiling and output the combined results. The controlling sensor is referred to as the *Main* sensor, and the other sensor is referred to as the *Buddy* sensor. Gocator's software recognizes three installation orientations: *Opposite*, *Wide*, and *Reverse*.

A Master 400/800/1200/2400 must be used to connect two sensors in a dual-sensor system. Gocator Power and Ethernet to Master cordsets are used to connect sensors to the Master.

GOCATOR 2300 SERIES

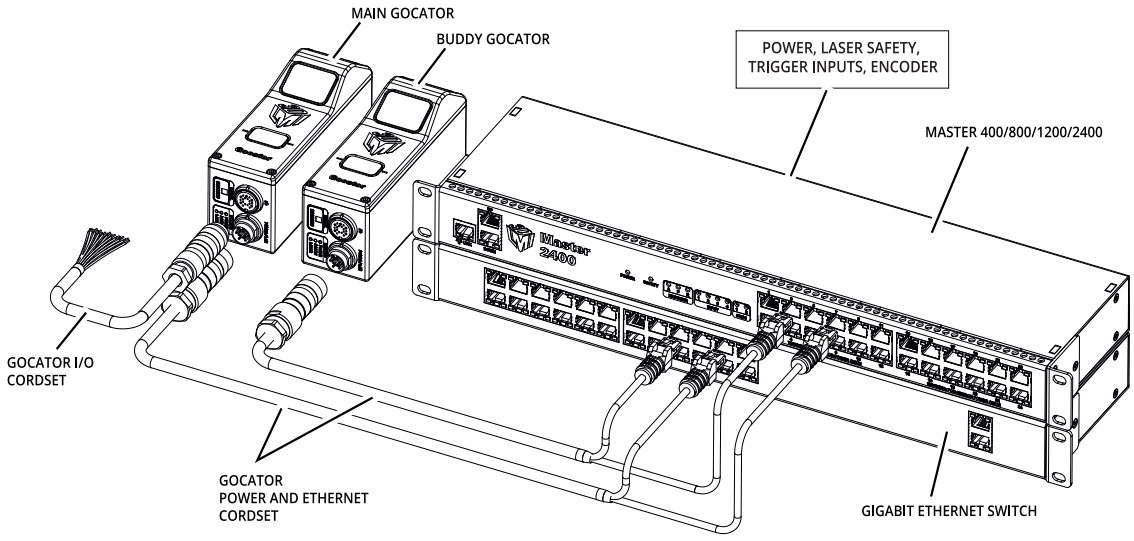


Multi-Sensor System

Master 400/800/1200/2400 networking hardware can be used to connect two or more sensors into a multi-sensor system. Gocator Master cordsets are used to connect the sensors to a Master. The Master provides a single point of connection for power, safety, encoder, and digital inputs. A Master 400/800/1200/2400 can be used to ensure that the scan timing is precisely synchronized across sensors. Sensors and client computers communicate via an Ethernet switch (1 Gigabit/s recommended).

Master 400/800/1200/2400 networking hardware does not support digital, serial, or analog output.


GOCATOR 2300 SERIES

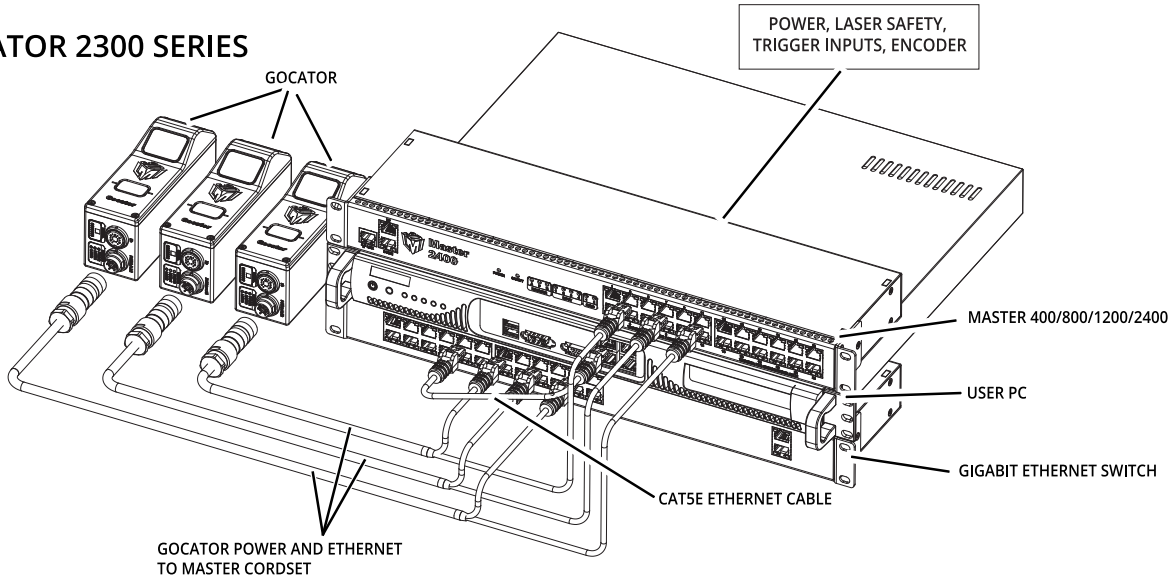

Hardware Overview

The following sections describe Gocator and its associated hardware.

Gocator Sensor

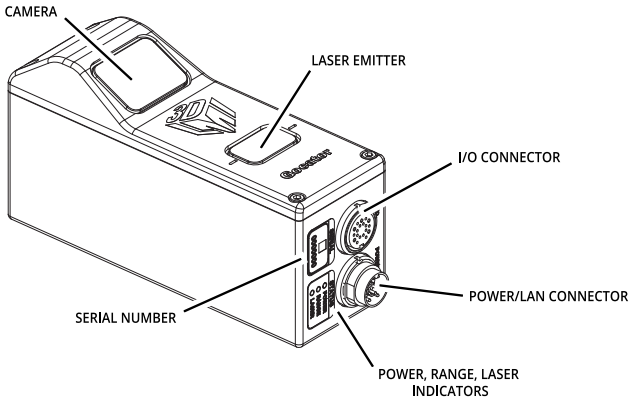

Gocator 2130 / 2330


Item	Description
Camera	Observes laser light reflected from target surfaces.
Laser Emitter	Emits structured light for laser profiling.
I/O Connector	Accepts input and output signals.
Power / LAN Connector	Accepts power and laser safety signals and connects to 1000 Mbit/s Ethernet network.
Power Indicator	Illuminates when power is applied (blue).
Range Indicator	Illuminates when camera detects laser light and is within the target range (green).
Laser Indicator	Illuminates when laser safety input is active (amber).
Serial Number	Unique sensor serial number.

Gocator Cordsets

Gocator sensors use two types of cordsets.

The Power & Ethernet cordset provides power, laser safety interlock to the sensor. It is also used for sensor communication via 1000 Mbit/s Ethernet with a standard RJ45 connector. The Master version of the Power & Ethernet cordset provides direct connection between the sensor and a Master 400/800/1200/2400.

The Gocator I/O cordset provides digital I/O connections, an encoder interface, RS-485 serial connection, and an analog output.

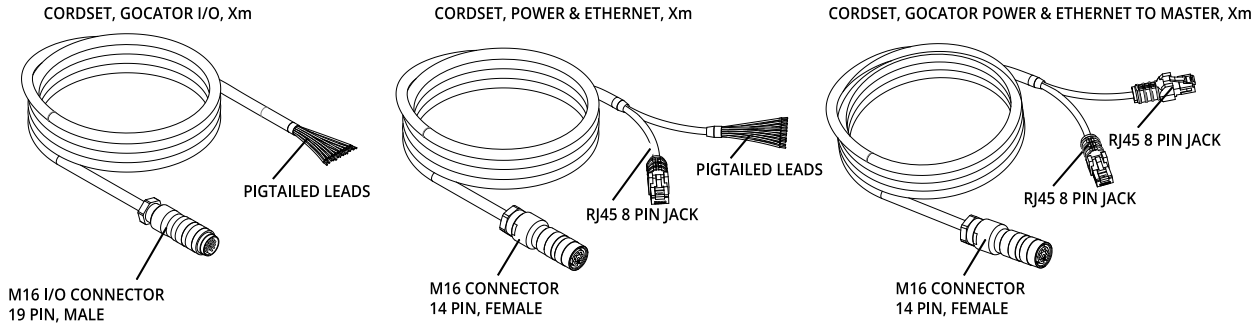


The maximum cordset length is 60 m. See *Gocator I/O Connector* on page 465 for pinout details.

See *Accessories* on page 477 for cordset lengths and part numbers. Contact LMI for information on creating cordsets with customized lengths and connector orientations.

Master 100

The Master 100 is used by Gocator sensors for standalone system setup (that is, a single sensor).

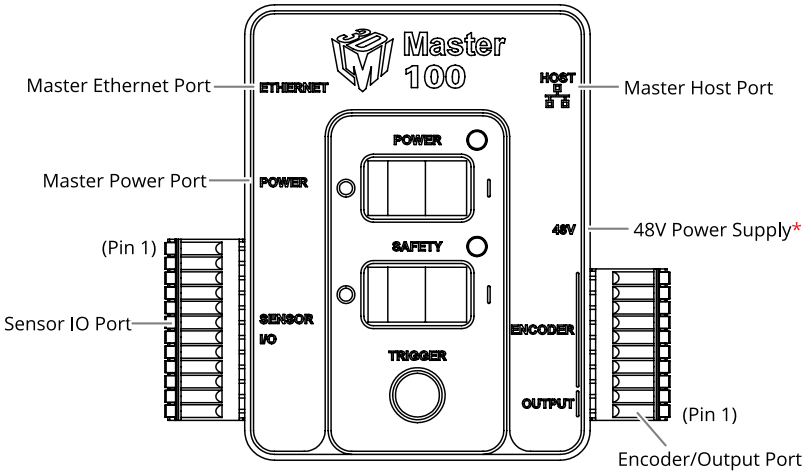


Item	Description
Master Ethernet Port	Connects to the RJ45 connector labeled Ethernet on the Power/LAN to Master cordset.
Master Power Port	Connects to the RJ45 connector labeled Power/Sync on the Power/LAN to Master cordset. Provides power and laser safety to the Gocator.
Sensor I/O Port	Connects to the Gocator I/O cordset.
Master Host Port	Connects to the host PC's Ethernet port.
Power	Accepts power (+48 V).
Power Switch	Toggles sensor power.
Laser Safety Switch	Toggles laser safety signal provided to the sensors [O= laser off, I= laser on].
Trigger	Signals a digital input trigger to the Gocator.
Encoder	Accepts encoder A, B and Z signals.
Digital Output	Provides digital output.

See *Master 100* on page 469 for pinout details.

Master 400/800

The Master 400 and the Master 800 allow you to connect more than two sensors. The Master 400 accepts four sensors, and the Master 800 accepts eight sensors.

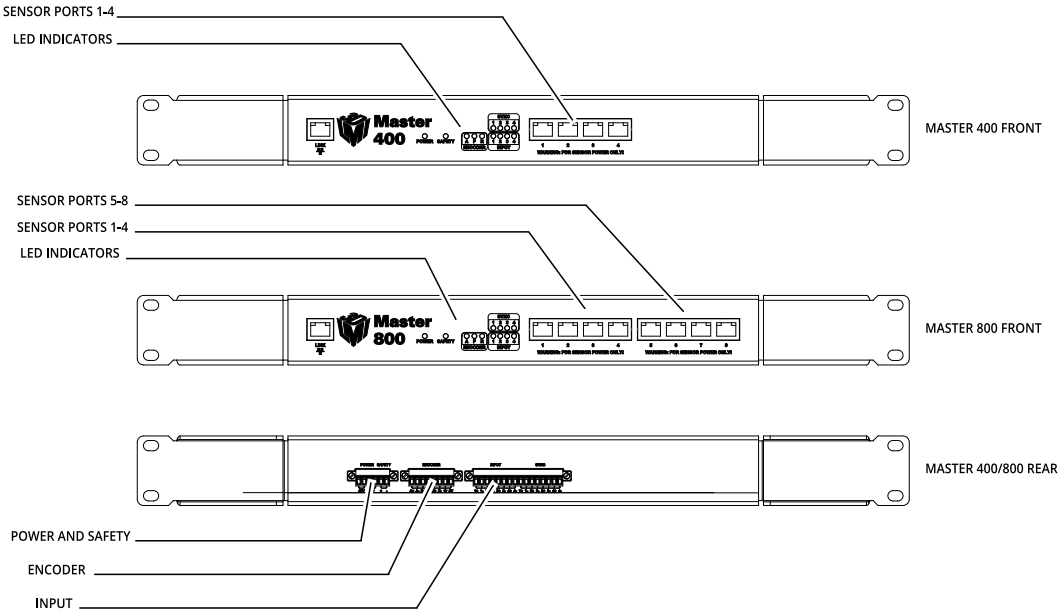


Item	Description
Sensor Ports	Master connection for Gocator sensors (no specific order required).
Ground Connection	Earth ground connection point.
Laser Safety	Laser safety connection.
Encoder	Accepts encoder signal.
Input	Accepts digital input.

See *Master 400/800* on page 471 for pinout details.

Master 1200/2400

The Master 1200 and the Master 2400 allow you to connect more than two sensors. The Master 1200 accepts twelve sensors, and the Master 2400 accepts twenty-four sensors.

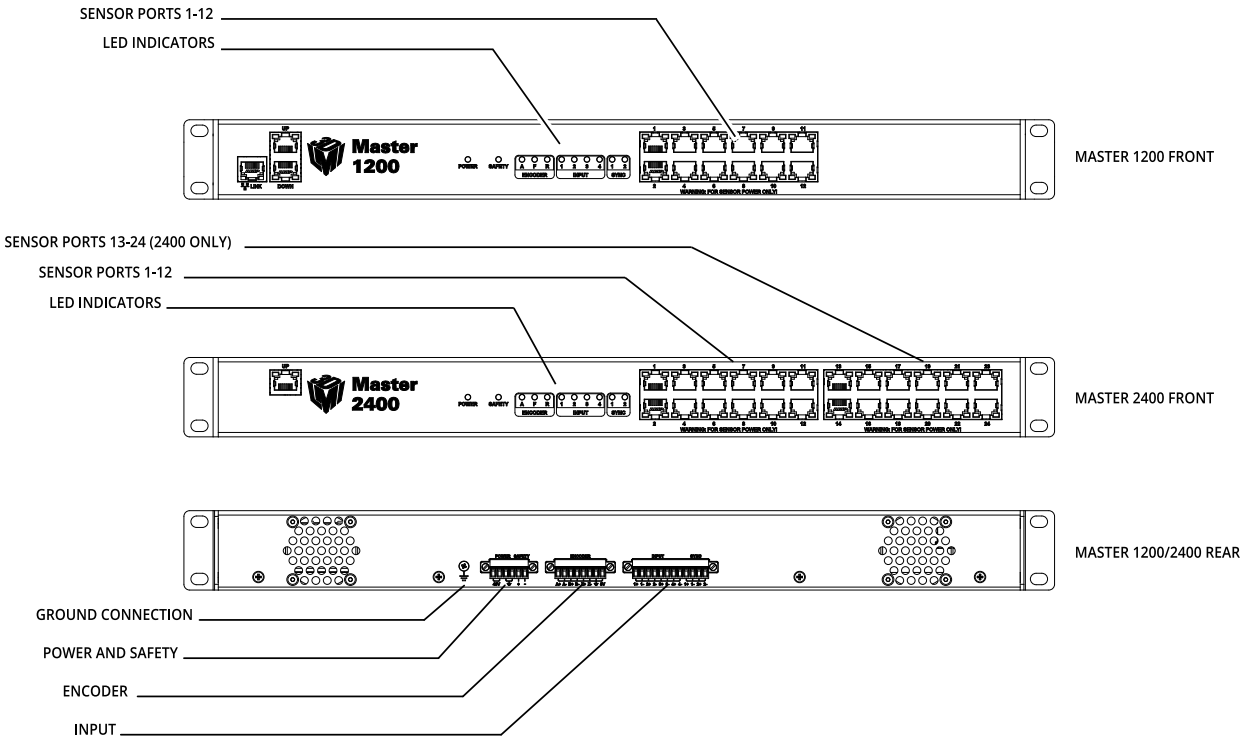


Item	Description
Sensor Ports	Master connection for Gocator sensors (no specific order required).
Ground Connection	Earth ground connection point.
Laser Safety	Laser safety connection.
Encoder	Accepts encoder signal.
Input	Accepts digital input.

See *Master 1200/2400* on page 474 for pinout details.


Calibration Targets

Targets are used for alignment and calibrating encoder systems.

Disks are typically used with systems containing a single sensor and can be ordered from LMI Technologies. When choosing a disk for your application, select the largest disk that fits entirely within the required field of view. See *Accessories* on page 477 for disk part numbers.

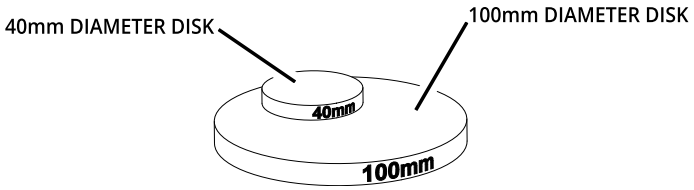

For wide, multi-sensor systems, bars are required to match the length of the system by following the guidelines illustrated below. (LMI Technologies does not manufacture or sell bars.)

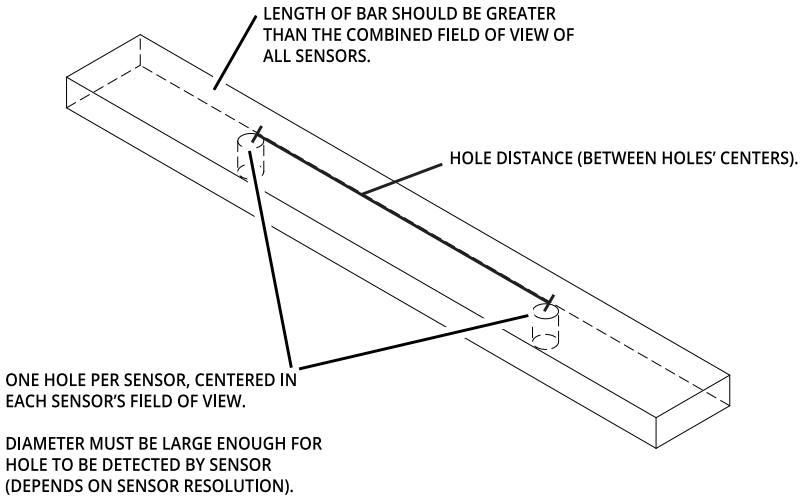

See *Aligning Sensors* on page 101 for more information on alignment.

Installation

The following sections provide grounding, mounting, and orientation information.

Grounding - Gocator


Gocators should be grounded to the earth/chassis through their housings and through the grounding shield of the Power I/O cordset. Gocator sensors have been designed to provide adequate grounding through the use of M5 x 0.8 pitch mounting screws. Always check grounding with a multi-meter to ensure electrical continuity between the mounting frame and the Gocator's connectors.

> The frame or electrical cabinet that the Gocator is mounted to must be connected to earth ground.


Recommended Grounding Practices - Cordsets

If you need to minimize interference with other equipment, you can ground the Power & Ethernet or the Power & Ethernet to Master cordset (depending on which cordset you are using) by terminating the shield of the cordset before the split. The most effective grounding method is to use a 360-degree clamp.

CORDSET, POWER & ETHERNET, Xm

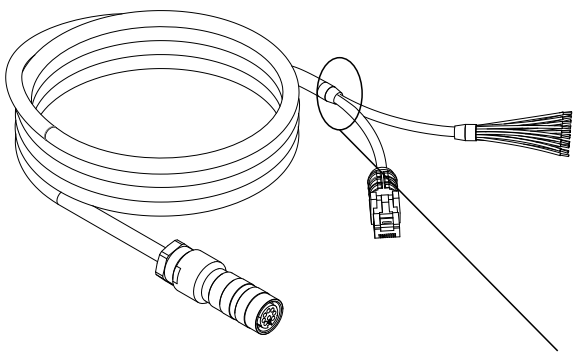


CORDSET, GOCATOR POWER & ETHERNET TO MASTER, Xm

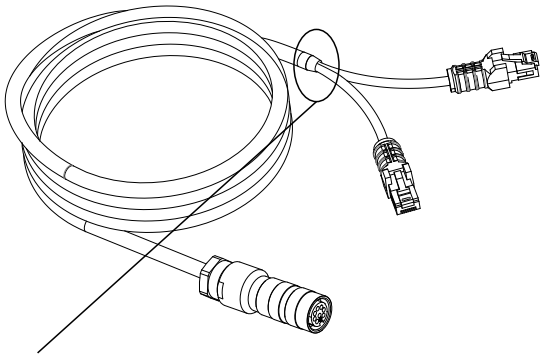

Attach the 360-degree clamp before the split

To terminate the cordset's shield:

1. Expose the cordset's braided shield by cutting the plastic jacket before the point where the cordset splits.

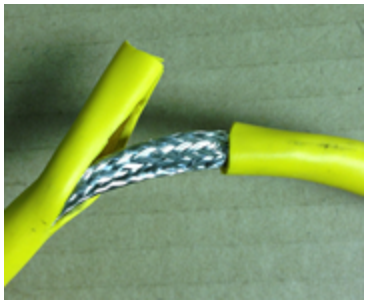

2. Install a 360-degree ground clamp.




Grounding - Master 400/800/1200/2400

The mounting brackets of all Masters have been designed to provide adequate grounding through the use of star washers. Always check grounding with a multi-meter by ensuring electrical continuity between the mounting frame and RJ45 connectors on the front.


> The frame or electrical cabinet that the Master is mounted to must be connected to earth ground.

Mounting


Sensors should be mounted using four or six (depending on the model) M5 x 0.8 pitch screws of suitable length. The recommended thread engagement into the housing is 8 - 10 mm. Proper care should be taken in order to ensure that the internal threads are not damaged from cross-threading or improper insertion of screws.



With the exception of Gocator 2880, sensors should not be installed near objects that might occlude a camera's view of the laser. (Gocator 2880 is specifically designed to compensate for occlusions.)



Sensors should not be installed near surfaces that might create unanticipated laser reflections.

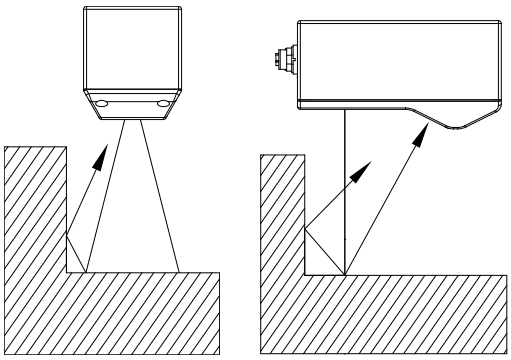

⚠	The sensor must be heat sunk through the frame it is mounted to. When a sensor is properly heat sunk, the difference between ambient temperature and the temperature reported in the sensor's health channel is less than 15° C.


⚠	Gocator sensors are high-accuracy devices. The temperature of all of its components must be in equilibrium. When the sensor is powered up, a warm-up time of at least one hour is required to reach a consistent spread of temperature within the sensor.

Orientations


The examples below illustrate the possible mounting orientations for standalone and dual-sensor systems.

See *System Layout* on page 66 for more information on orientations.

Standalone Orientations

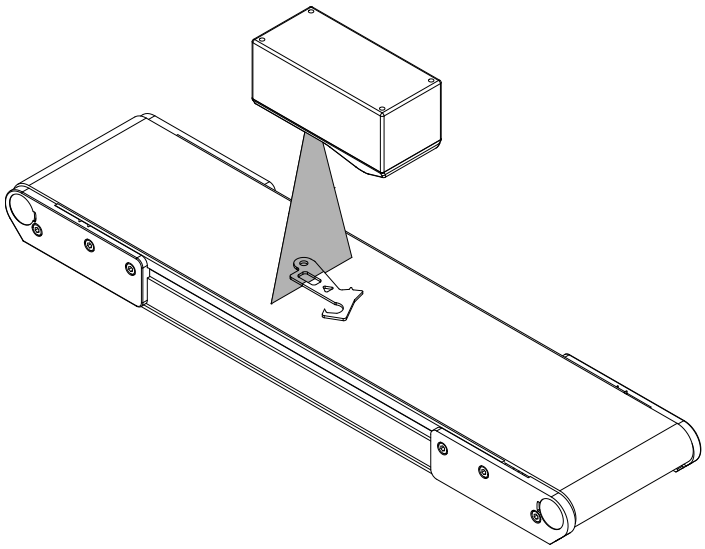


Single sensor above conveyor

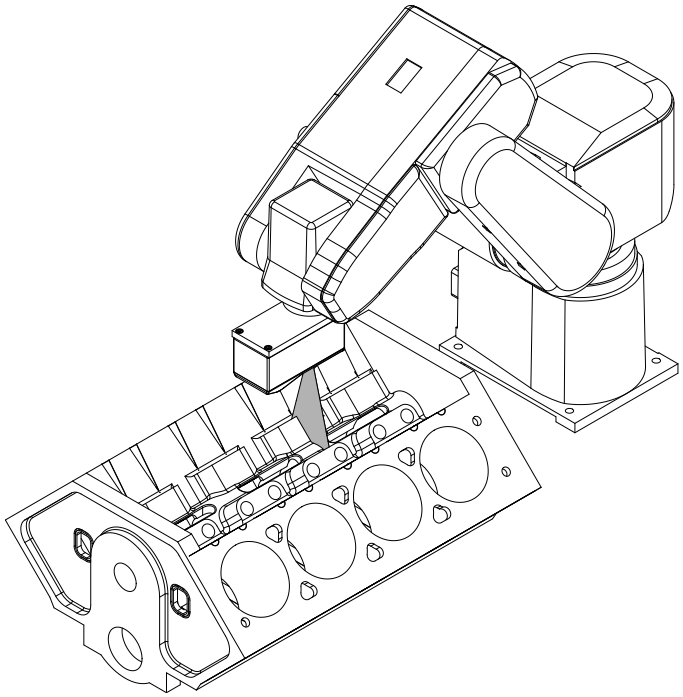


Single sensor on robot arm


Dual-Sensor System Orientations:

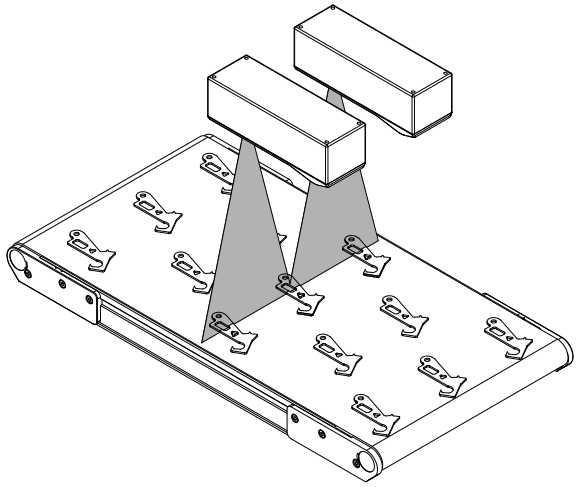


Side-by-side for wide-area measurement (Wide)

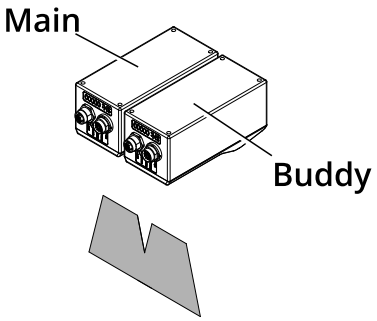

Main must be on the left side (when looking into the connector) of the Buddy (Wide)

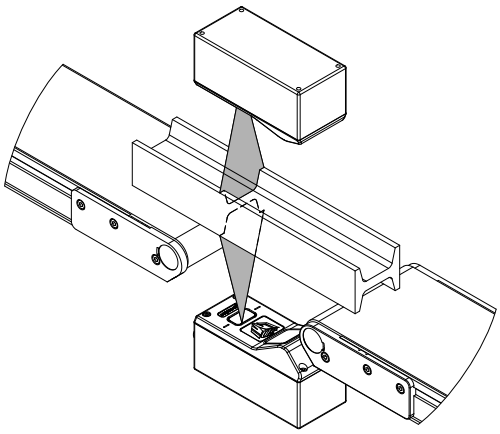

Above/below for two-sided measurement (Opposite)

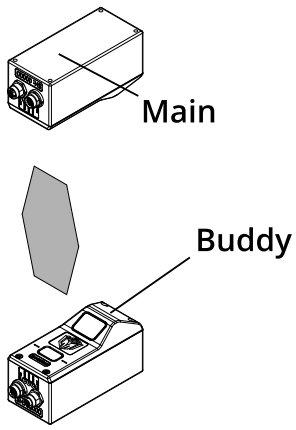

Main must be on the top with Buddy on the bottom (Opposite)


For more information on setting up a dual-sensor system, see http://lmi3d.com/sites/default/files/APPNOTE_Gocator_2300_Gocator_4.x_Dual_Sensor_Setup_Guide.pdf.

Rut-Scanning System Setup

The following sections describe how to set up a Gocator 2375 rut-scanning system.

Layout


The Gocator 2375 sensor is designed to cover a scan width of up to 4.2 m by using 8 sensors mounted in parallel.

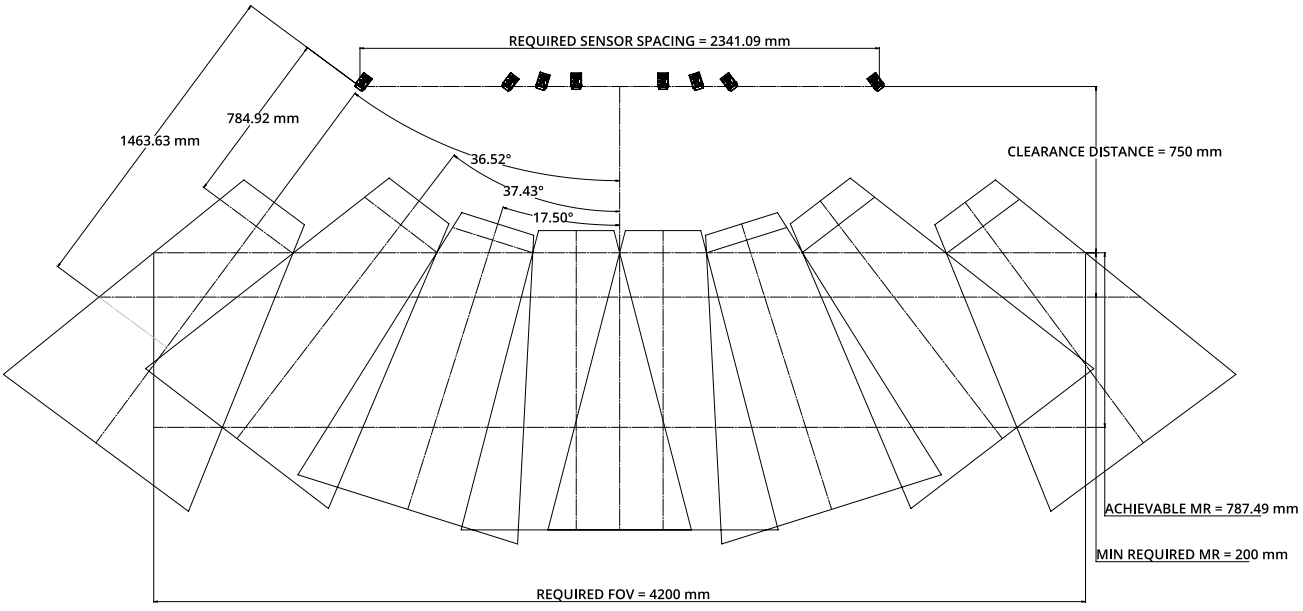

The diagram above shows the clearance distance and measurement range required in a typical setup. Use the specification estimator (Gocator-2375_Specification_Estimator.xlsx) to calculate the X and Z resolution of the sensors with different combinations of clearance distance and measurement range.

System Setup

A typical Gocator 2375 system is set up as a multi-sensor system. The sensors are powered using a Master 400/800/1200/2400.

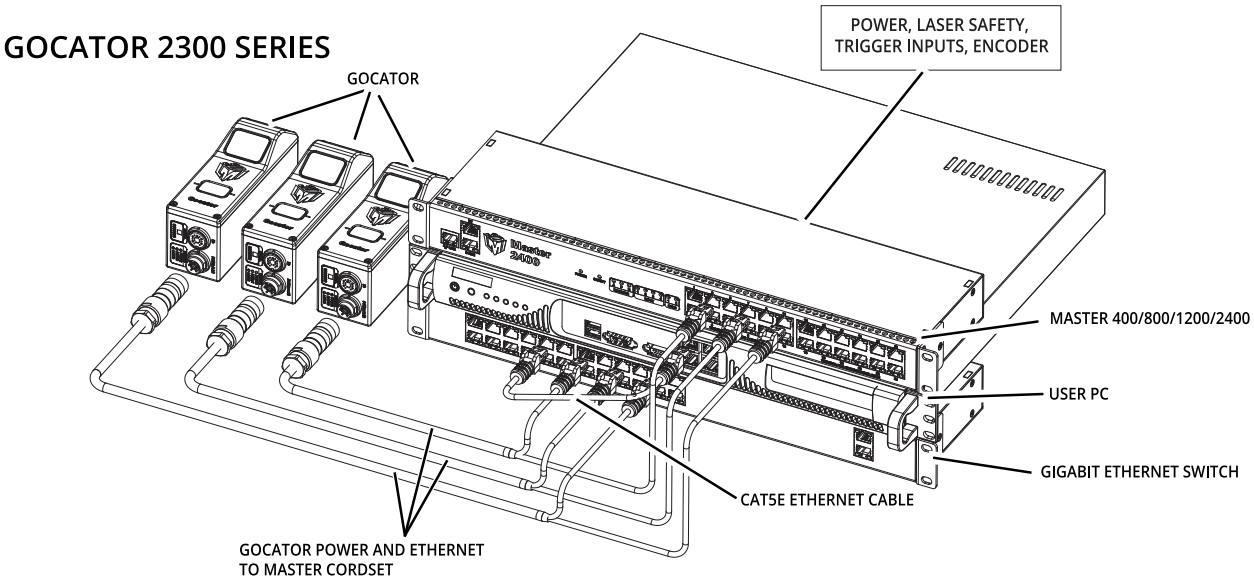

To connect a Gocator 2375:

1. Connect the Power and Ethernet to Master cordset to the Power/LAN connector on the sensor.
2. Connect the RJ45 jack labeled Power to an unused port on the Master.
3. Connect the RJ45 jack labeled Ethernet to an unused port on the Master.
4. Repeat the steps above for each sensor.

See *Master 400/800* on page 471 and *Master 1200/2400* on page 474 for more information on how to install a Master.

Software Configuration

Each sensor is shipped with a default IP address of 192.168.1.10. Before you add a sensor to a multi-sensor system, its firmware version must match that of the other sensors, and its IP address must be unique.

To configure a Gocator 2375 for the first time:

1. Set up the sensor's IP address.
   a. Follow the steps in *Running a Standalone Sensor System* on page 35.
   b. Make sure that there is no other sensor in the network with the IP address 192.168.1.10.

2. Upgrade the firmware.
   a. Follow the steps in *Firmware Upgrade* on page 77.
3. Set up profiling parameters.
   a. Follow the steps in *Scan Setup and Alignment* on page 81 to set up profiling parameters. Typically, trigger, active area, and exposure will need to be adjusted.

System Operation

An isolated layout should be used. Under this layout, each sensor can be independently controlled by the SDK. The following application notes explain how to operate a multi-sensor system using the SDK.

APPNOTE_Gocator_4.x_Multi_Sensor_Guide.zip
Explains how to use the SDK to create a multi-sensor system, and multiplex their timing.

Gocator-2000-2300_appnote_multi-sensor-alignment-calibration.zip
Explains how to use the SDK to perform alignment calibration of a multi-sensor system.

You can find the app notes under the How-to category in LMI's online Gocator resources.

Example code is included with both of the application notes above.

Network Setup

The following sections provide procedures for client PC and Gocator network setup.

> DHCP is not recommended for Gocator sensors. If you choose to use DHCP, the DHCP server should try to preserve IP addresses. Ideally, you should use static IP address assignment (by MAC address) to do this.

Client Setup


Sensors are shipped with the following default network configuration:

Setting	Default
DHCP	Disabled
IP Address	192.168.1.10
Subnet Mask	255.255.255.0
Gateway	0.0.0.0

> All Gocator sensors are configured to 192.168.1.10 as the default IP address. For a dual-sensor system, the Main and Buddy sensors must be assigned unique addresses before they can be used on the same network. Before proceeding, connect the Main and Buddy sensors one at a time (to avoid an address conflict) and use the steps in See *Running a Dual-Sensor System* on page 36 to assign each sensor a unique address.

To connect to a sensor for the first time:

1. Connect cables and apply power. Sensor cabling is illustrated in *System Overview* on page 18.

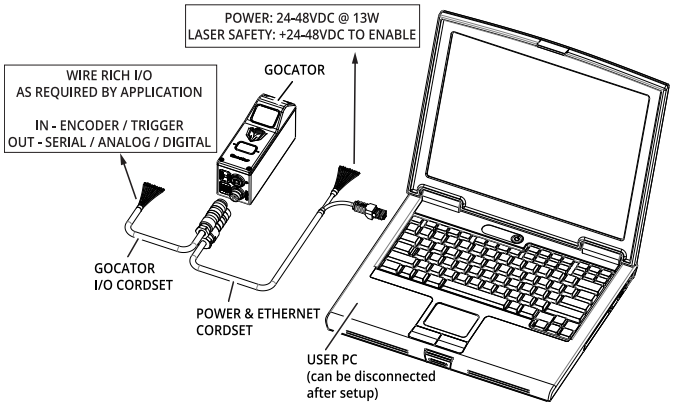

2. Change the client PC's network settings.

   Windows 7


   a. Open the Control Panel, select **Network and Sharing Center**, and then click **Change Adapter Settings**.

   b. Right-click the network connection you want to modify, and then click **Properties**.

   c. On the **Networking** tab, click **Internet Protocol Version 4 (TCP/IPv4)**, and then click **Properties**.

   d. Select the **Use the following IP address** option.

   e. Enter IP Address "192.168.1.5" and Subnet Mask "255.255.255.0", then click **OK**.

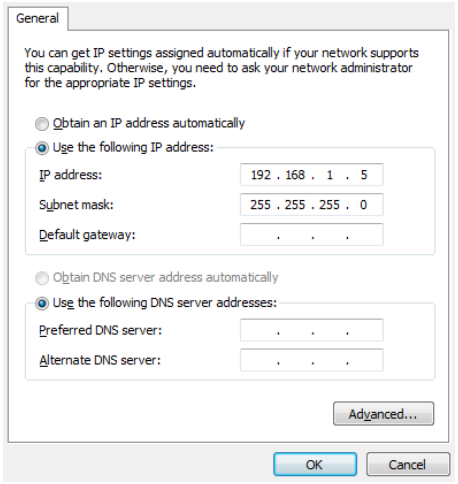


   Mac OS X v10.6

   a. Open the Network pane in **System Preferences** and select **Ethernet**.

   b. Set **Configure** to **Manually**.

   c. Enter IP Address "192.168.1.5" and Subnet Mask "255.255.255.0", then click **Apply**.

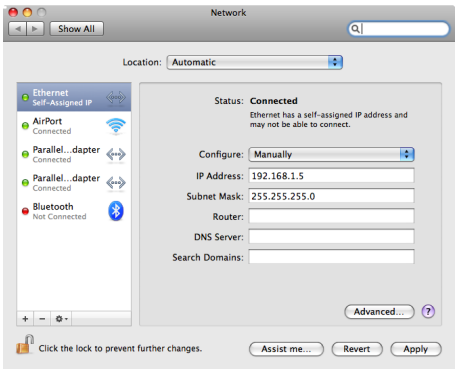

> ⚠ See *Troubleshooting* on page 431 if you experience any problems while attempting to establish a connection to the sensor.

Gocator Setup


The Gocator is shipped with a default configuration that will produce laser profiles on most targets.

The following sections walk you through the steps required to set up a standalone sensor system and a dual-sensor system for operations. After you have completed the setup, you can perform laser profiling to verify basic sensor operation.

Running a Standalone Sensor System

To configure a standalone sensor system:


1. Power up the sensor.
   The power indicator (blue) should turn on immediately.




2. Enter the sensor's IP address (192.168.1.10) in a web browser.




3. Log in as Administrator with no password.
   The interface display language can be changed using the language option. After selecting the language, the browser will refresh and the web interface will display in the selected language.

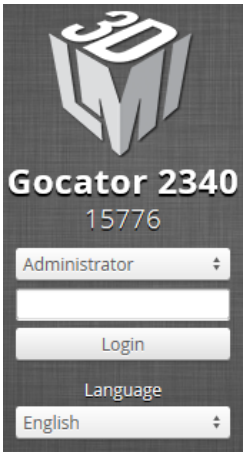


4. Go to the **Manage** page.



5. Ensure that **Replay** mode is off (the slider is set to the left).

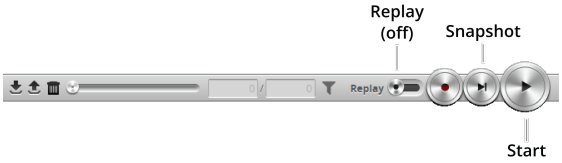


6. Ensure that the Laser Safety Switch is enabled or the Laser Safety input is high.
7. Go to the **Scan** page.
8. Press the **Start** button or the **Snapshot** on the **Toolbar** to start the sensor.
   The **Start** button is used to run sensors continuously.



Master 200

The **Snapshot** button is used to trigger the capture of a single profile.




Standalone



Master 400/800/1200/2400

9. Move a target into the laser plane.
   If a target object is within the sensor's measurement range, the data viewer will display the shape of the target, and the sensor's range indicator will illuminate.
   If you cannot see the laser, or if a profile is not displayed in the Data Viewer, see *Troubleshooting* on page 431.

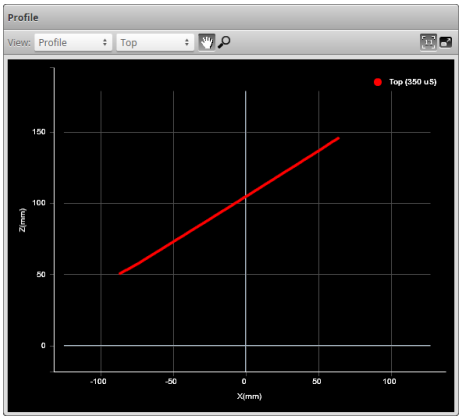

10. Press the **Stop** button.
    The laser should turn off.




Running a Dual-Sensor System


All sensors are shipped with a default IP address of 192.168.1.10. Ethernet networks require a unique IP address for each device, so you must set up a unique address for each sensor.

To configure a dual-sensor system:

1. Turn off the sensors and unplug the Ethernet network connection of the Main sensor.
   All sensors are shipped with a default IP address of 192.168.1.10. Ethernet networks require a unique IP address for each device. Skip step 1 to 3 if the Buddy sensor's IP address is already set up with an unique address.

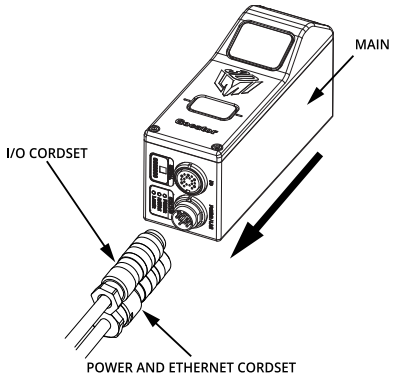


2. Power up the Buddy sensor.
   The power LED (blue) of the Buddy sensor should turn on immediately.




3. Enter the sensor's IP address 192.168.1.10 in a web browser.
   This will log into the Buddy sensor.




4. Log in as Administrator with no password.

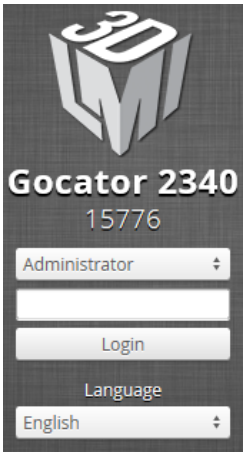


5. Go to the **Manage** Page.



6. Modify the IP address to 192.168.1.11 in the **Networking** category and click the **Save** button.
   When you click the **Save** button, you will be prompted to confirm your selection.

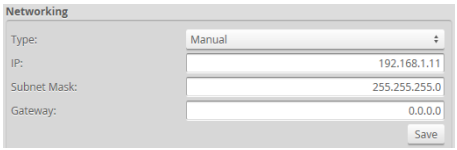


7. Turn off the sensors, re-connect the Main sensor's Ethernet connection and power-cycle the sensors.
   After changing network configuration, the sensors must be reset or power-cycled before the change will take effect.

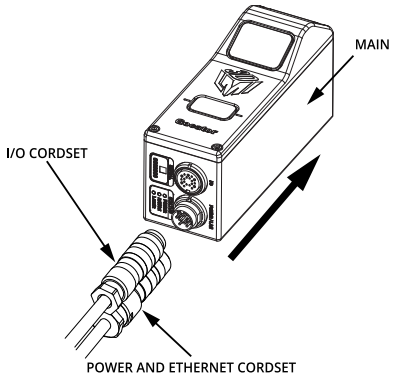


8. Enter the sensor's IP address 192.168.1.10 in a web browser.
   This will log into the Main sensor.




9. Log in as Administrator with no password.
   The interface display language can be changed using the language option. After selecting the language, the browser will refresh and the web interface will display in the selected language.

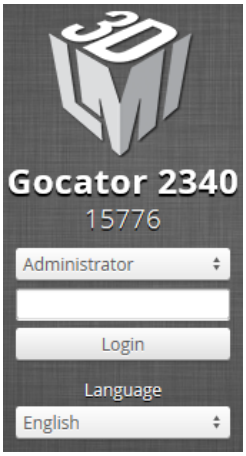

10. Select the **Manage** page.




11. Go to **Manage** page, **Sensor System** panel, and select the **Visible Sensors** panel.
    The serial number of the Buddy sensor is listed in the Available Sensors panel.

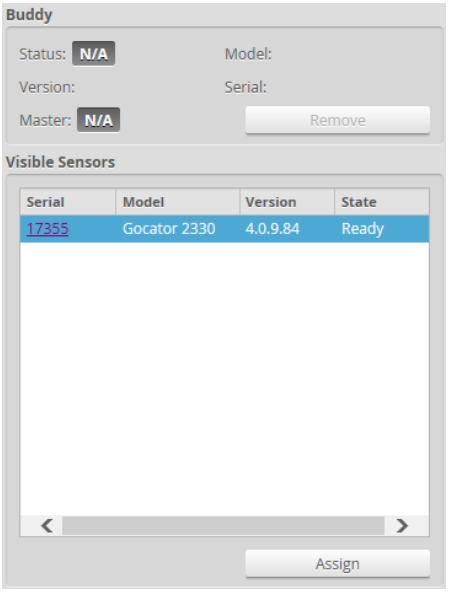


12. Select the Buddy sensor and click the **Assign** button.
    The Buddy sensor will be assigned to the Main sensor and its status will be updated in the System panel.
    The firmware on Main and Buddy sensors must be the same for Buddy assignment to be successful. If the firmware is different, connect the Main and Buddy sensor one at a time and follow the steps in *Firmware Upgrade* on page 77 to upgrade the sensors.

13. Ensure that the Laser Safety Switch is enabled or the Laser Safety input is high.




Master 400/800/1200/2400

14. Ensure that **Replay** mode is off (the slider is set to the left).
15. Go to the the **Scan** page.
16. Press the **Start** or the **Snapshot** button on the **Toolbar**to start the sensors.
    The **Start** button is used to run sensors continuously, while the **Snapshot** button is used to trigger a single profile.

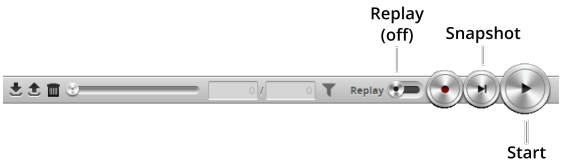

17. Move a target into the laser plane.
    If a target object is within the sensor's measurement range, the data viewer will display the shape of the target, and the sensor's range indicator will illuminate.
    If you cannot see the laser, or if a profile is not displayed in the Data Viewer, see *Troubleshooting* on page 431.

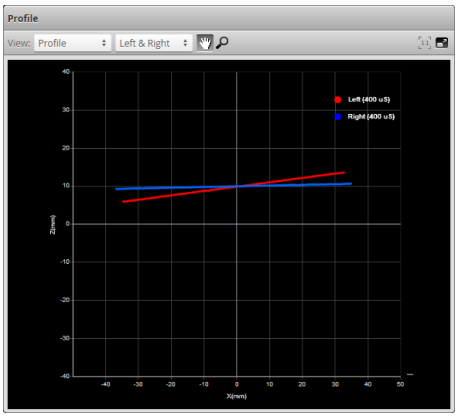

18. Press the **Stop** button if you used the **Start** button to start the sensors.
    The laser should turn off.



Next Steps

After you complete the steps in this section, the Gocator measurement system is ready to be configured for an application using the software interface. The interface is explained in the following sections:

System Management and Maintenance (page 65)
Contains settings for sensor system layout, network, motion and alignment, handling jobs, and sensor maintenance.

Scan Setup and Alignment (page 81)
Contains settings for scan mode, trigger source, detailed sensor configuration, and performing alignment.

Measurement (page 148)
Contains built-in measurement tools and their settings.

Output (page 229)
Contains settings for configuring output protocols used to communicate measurements to external devices.

Dashboard (page 241)
Provides monitoring of measurement statistics and sensor health.

Toolbar (page 56)


Controls sensor operation, manages jobs, and replays recorded measurement data.

How Gocator Works


The following sections provide an overview of how Gocator acquires and produces data, detects and measures parts, and controls devices such as PLCs. Some of these concepts are important for understanding how you should mount sensors and configure settings such as active area.


3D Acquisition

After a Gocator system has been set up and is running, it is ready to start capturing 3D data.

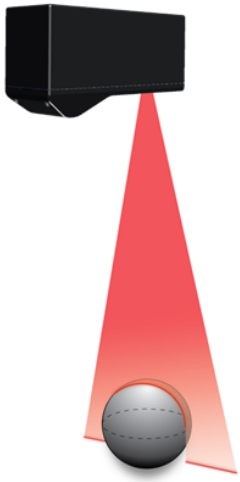

The sensor's camera views the laser line on the target from an angle and captures the reflection of the laser light off the target. The camera captures a single 3D profile—a slice, in a sense—for each camera exposure. The reflected laser light falls on the camera at different positions, depending on the distance of the target from the sensor. The sensor's laser emitter, its camera, and the target form a triangle. Gocator uses the known distance between the laser emitter and the camera, and two known angles—one of which depends on the position of the laser light on the camera—to calculate the distance from the sensor to the target. This translates to the height of the target. This method of calculating distance is called *laser triangulation*.

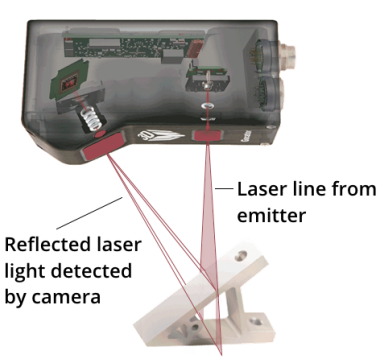

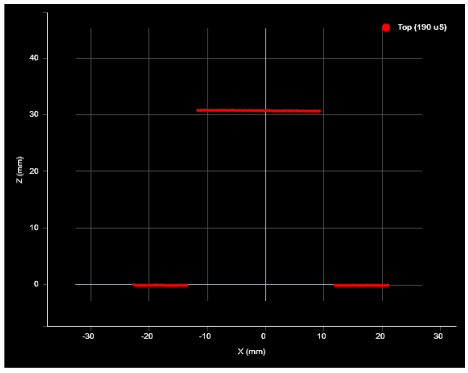

Resulting laser profile

Target objects are typically moved under the sensor on a transportation mechanism, such as a conveyor belt. Sensors can also be mounted on robot arms and moved over the target. In both cases, the sensor captures a series of 3D profiles, building up a full scan of the object. Sensor speed and required exposure time to measure the target are typically critical factors in applications with line profiler sensors.

> Gocator sensors are always pre-calibrated to deliver 3D data in engineering units throughout their measurement range.


Clearance Distance, Field of View and Measurement Range

Clearance distance (CD), field of view (FOV), and measurement range (MR) are important concepts for understanding the setup of a Gocator sensor and for understanding results.

Clearance distance – The minimum distance from the sensor that a target can be scanned and measured. A target closer than this distance will result in invalid data.

Measurement range – The vertical distance, starting at the end of the clearance distance, in which targets can be scanned and measured. Targets beyond the measurement range will result in invalid data.

Field of view – The width on the X axis along the measurement range. At the far end of the measurement range, the field of view is wider, but the X resolution and Z resolutionis lower. At the near end, the field of view is narrower, but the X resolution is higher. When resolution is critical, if possible, place the target closer to the near end.

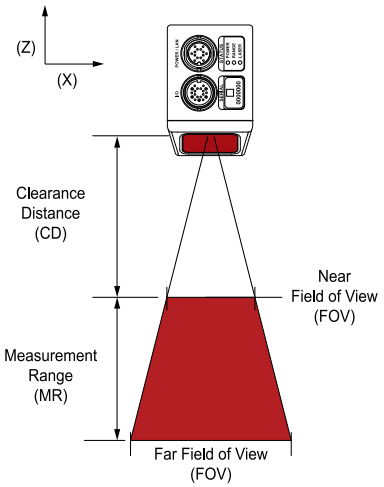

Resolution and Accuracy

The following sections describe X Resolution, Z Resolution, and Z Linearity. These terms are used in the Gocator datasheets to describe the measurement capabilities of the sensors.


X Resolution

X resolution is the horizontal distance between each measurement point along the laser line. This specification is based on the number of camera columns used to cover the field of view (FOV) at a particular measurement range.

Because the FOV is trapezoidal (shown in red, below), the distance between points is closer at the near range than at the far range. This is reflected in the Gocator data sheet as the two numbers quoted for X resolution.


X Resolution is important for understanding how accurately width on a target can be measured.

> When the Gocator runs in Profile mode and **Uniform Spacing** is enabled, the 3D data is resampled to an X interval that is different from the raw camera resolution. For more information, see *Uniform Spacing (Data Resampling)* on page 50.

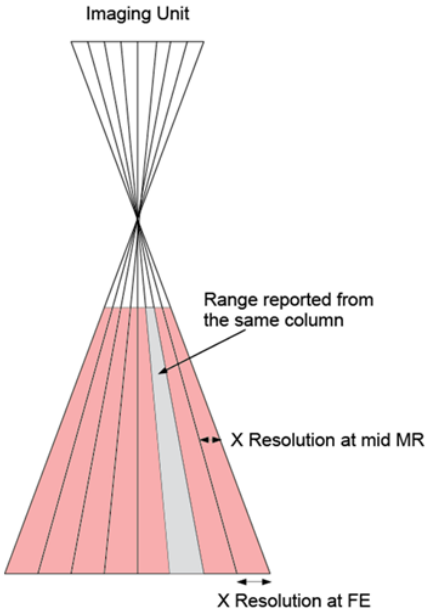

Z Resolution


Z Resolution gives an indication of the smallest detectable height difference at each point, or how accurately height on a target can be measured. Variability of height measurements at any given moment, in each individual 3D point, with the target at a fixed position, limits Z resolution. This variability is caused by camera and sensor electronics.

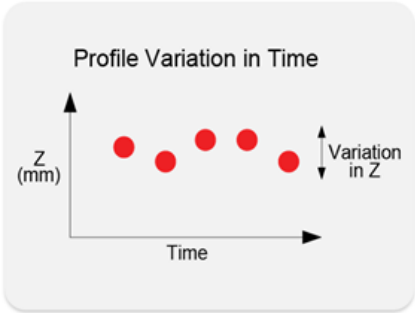

Like X resolution, Z resolution is better closer to the sensor. This is reflected in the Gocator data sheet as the two numbers quoted for Z resolution.

Z Linearity

Z linearity is the difference between the actual distance to the target and the measured distance to the target, throughout the measurement range. Z linearity gives an indication of the sensor's ability to measure absolute distance.

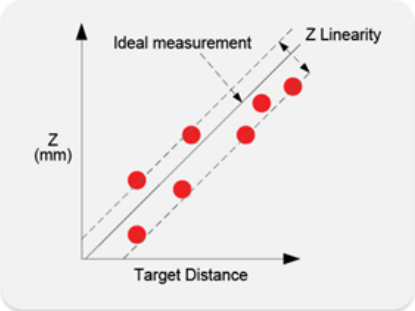

Z linearity is expressed in the Gocator data sheet as a percentage of the total measurement range.

Profile Output


Gocator represents a profile as a series of ranges, with each range representing the distance from the origin. Each range contains a height (on the Z axis) and a position (on the X axis) in the sensor's field of view.


Coordinate Systems

Range data is reported in sensor or system coordinates depending on the alignment state. The coordinate systems are described below.

Sensor Coordinates


Unaligned sensors use the coordinate system shown below.



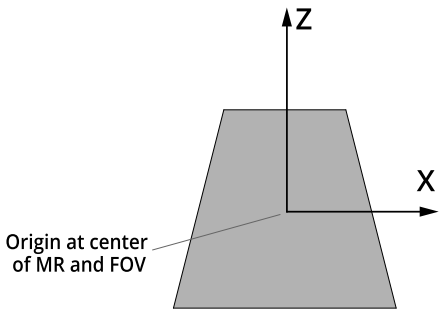

The measurement range (MR) is along the Z axis. Values increase toward the sensor. The sensor's field of view (FOV) is along the X axis. The origin is at the center of the MR and FOV.

In Surface data, the Y axis represents the relative position of the part in the direction of travel. Y position increases as the object moves forward (increasing encoder position). The image below represents a left-handed coordinate system.

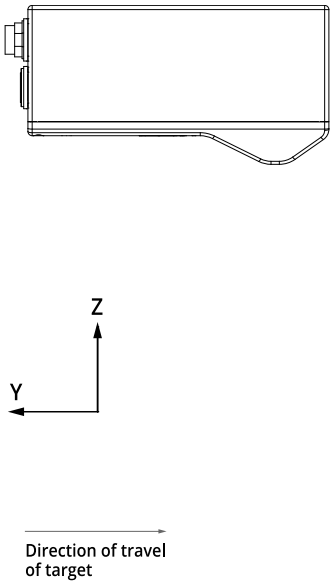



The mounting direction, relative to the direction of travel, can be set in Gocator using either the Normal or Reverse layout. For more information, see *System Layout* on page 66.

System Coordinates


Aligning sensors adjusts the coordinate system in relation to sensor coordinates.

Alignment is used with a single sensor to compensate for mounting misalignment and to set a zero reference, such as a conveyor belt surface.




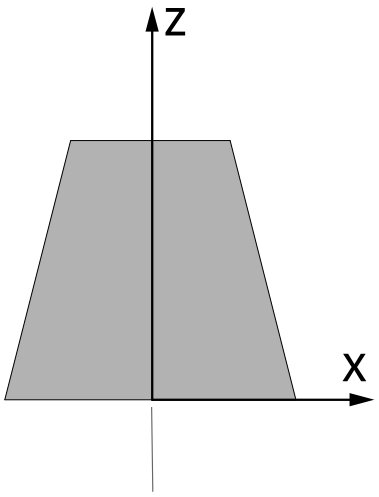

Alignment is also used to set a common coordinate system for dual-sensor systems. That is, profiles and measurements from the sensors are expressed in a unified coordinate system.

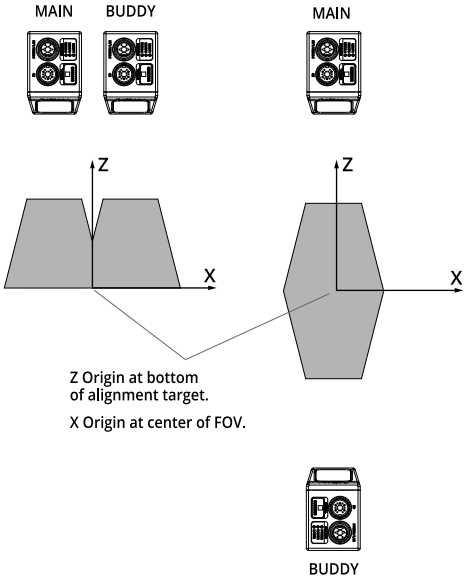

In both cases, alignment determines the offsets in X and Z. Alignment also determines the tilt (angle on the X–Z plane, around the Y axis) needed to align sensor data.

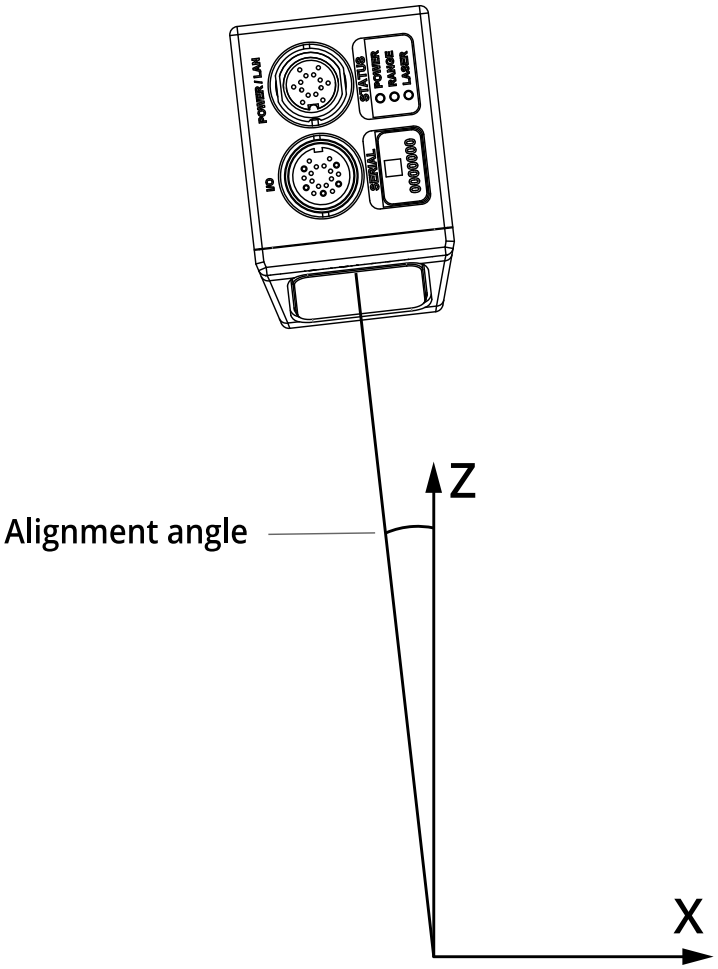

The adjustments resulting from alignment are called *transformations* and are displayed in **Sensor** panel on the **Scan** page.

System coordinates are aligned so that the system X axis is parallel to the alignment target surface. The system Z origin is set to the base of the alignment target object. The tilt angle is positive when rotating from the X to the Z axis.

As with sensor coordinates, Y position increases as the object moves forward (increasing encoder position). The orientation of the Y axis is unaffected by alignment.

For more information on aligning sensors, see *Alignment* on page 100.


Part and Section Coordinates


When you work with parts or sections extracted from scan data, a different coordinate system is available.

Part data can be expressed in aligned system coordinates or unaligned sensor coordinates, depending on the alignment state of the sensor. Part data can *also* be represented in part coordinates, in which the

data and measurement results are in a coordinate system that places the X and Y origins at the center of the part. The Z origin is at the bottom of the alignment target (or in the center of the measurement range if the sensor is unaligned).

> The **Frame of Reference** setting, in the **Part Detection** panel on the **Scan** page, controls whether part data is recorded using sensor/system coordinates or part coordinates.





Switching between Coordinate Systems


In many situations, when working with section data or part data that has been recorded with **Frame of Reference** set to **Part**, it is useful to have access to the "real-world" coordinates, rather than part- or section-relative coordinates. Gocator provides special "global" measurements, in the Bounding Box tools, that you can use in Gocator scripts to convert from part or section coordinates to sensor/system coordinates.

For more information, see the Profile Bounding Box tool or the Surface Bounding Box tool, and the Script tool.

Uniform Spacing (Data Resampling)

Data produced in Profile mode is available in two formats: with and without uniform spacing. Uniform spacing is enabled in the **Scan Mode** panel, on the **Scan** page.

When uniform spacing is enabled, the ranges that make up a profile are resampled so that the spacing is uniform along the laser line (X axis). The resampling divides the X axis into fixed size "bins." Profile points that fall into the same bin are combined into a single range value (Z). The size of the spacing interval can be set under the **Spacing** tab in the **Sensor** panel on **Scan** page.

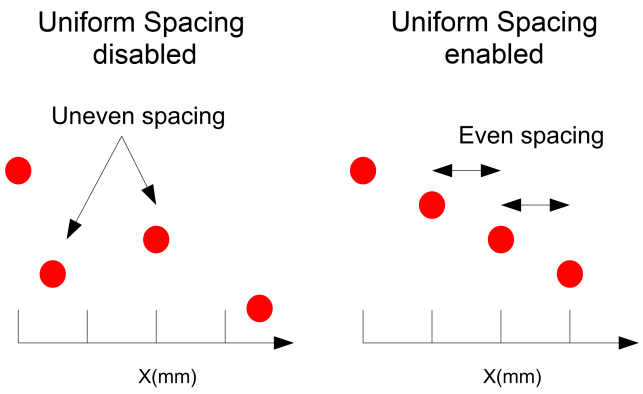

Resampling to uniform spacing reduces the complexity for downstream algorithms to process the profile data from the Gocator, but places a higher processing load on the sensor's CPU.

When uniform spacing is not enabled, no processing is required on the sensor. This frees up processing resources in the Gocator, but usually requires more complicated processing on the client side. Ranges in this case are reported in (X, Z) coordinate pairs.

Most built-in measurement tools in the Gocator in Profile mode operate on profiles with uniform spacing. A limited number of tools can operate on profiles without uniform spacing. For more information on the profile tools, see *Profile Measurement* on page 159.

> When uniform spacing is enabled, in the Ethernet output, only the range values (Z) are reported and the X positions can be reconstructed through the array index at the receiving end (the client). For more information on Ethernet output, see *Ethernet Output* on page 230.

For information on enabling uniform spacing, see *Scan Modes* on page 82.


Data Generation and Processing

After scanning a target, Gocator can process the scan data to allow the use of more sophisticated measurement tools. This section describes the following concepts:

- Surface generation
- Part detection
- Sectioning

Surface Generation


Gocator laser profile sensors create a single profile with each exposure. These sensors can combine a series of profiles gathered as a target moves under the sensor to generate a height map, or surface, of the entire target.

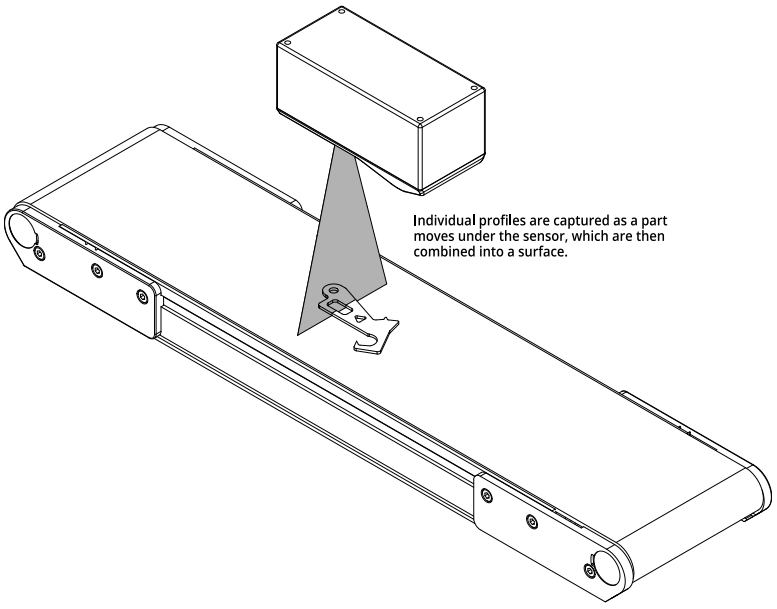

For more information, see *Surface Generation* on page 107.

Part Detection

After Gocator has generated a surface by combining single exposures into larger pieces of data, the firmware can isolate discrete parts on a generated surface into separate scans representing parts. Gocator can then perform measurements on these isolated parts.

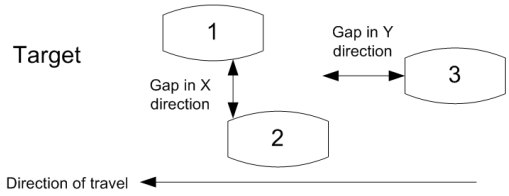


Part detection is useful when measurements on individual parts are needed and for robotic pick and place applications.

For more information on part detection, see *Part Detection* on page 111.

Sectioning

In Surface mode, Gocator can also extract a profile from a surface or part using a line you define on that surface or part. The resulting profile is called a "section." A section can have any orientation on the surface, but its profile is parallel to the Z axis.

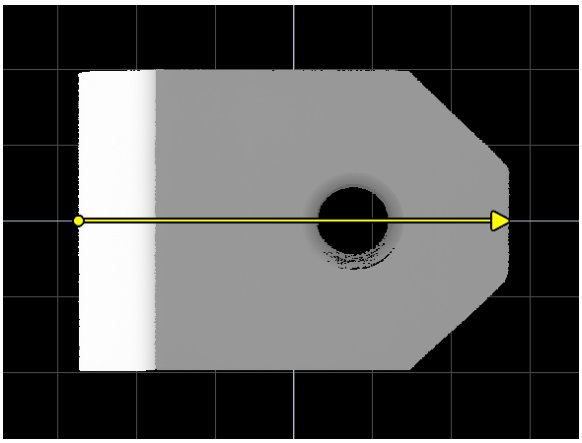


You can use most of Gocator's profile measurement tools on a section, letting you perform measurements that are not possible with surface measurement tools.

For more information on sections, see *Sections* on page 142.

Part Matching

Gocator can match scanned parts to the edges of a model based on a previously scanned part (see *Using Edge Detection* on page 129) or to the dimensions of a fitted bounding box or ellipse that encapsulate the model (see *Using Bounding Box and Ellipse* on page 138). When parts match, Gocator can rotate scans so that they are all oriented in the same way. This allows measurement tools to be applied consistently to parts, regardless of the orientation of the part you are trying to match.

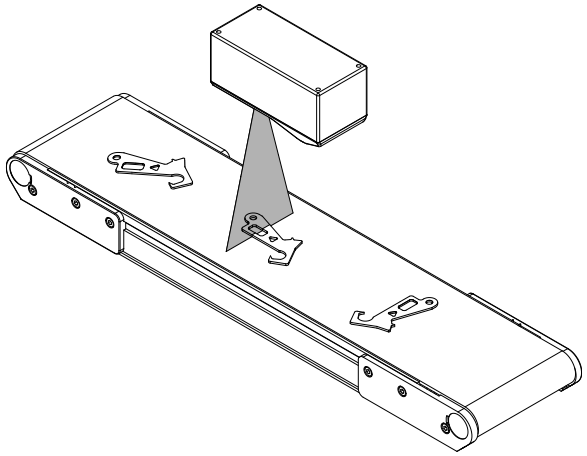

Measurement and Anchoring

After a target has been scanned and, optionally, the data has been further processed, Gocator is ready to take measurements on the scan data.

Gocator provides several measurement tools, each of which provides a set of individual measurements, giving you dozens of measurements ideal for a wide variety of applications to chose from. The configured measurements start returning pass/fail decisions, as well as the actual measured values, which are then sent over the enabled output channels to control devices such as PLCs, which can in turn control ejection or sorting mechanisms. (For more information on measurements and configuring measurements, see *Measurement* on page 148.)

A part's position can vary on a transport system. To compensate for this variation, Gocator can anchor a measurement to the positional measurement (X, Y, or Z) of an easily detectable feature, such as the edge of a part. The calculated offset between the two ensures that the anchored measurement will always be properly positioned on different parts.

If combined with the matching and rotation capabilities of part matching, anchoring accounts for most sources of variation in part position and orientation and, consequently, avoids many measurement errors. For more information on anchoring, see *Measurement Anchoring* on page 154.

Output and Digital Tracking

After Gocator has scanned and measured parts, the last step in the operation flow is to output the results and/or measurements.

One of the main functions of Gocator sensors is to produce pass/fail decisions, and then control something based on that decision. Typically, this involves rejecting a part through an eject gate, but it can also involve making decisions on good, but different, parts. This is described as “output” in Gocator. Gocator supports the following output types:

- Ethernet (which provides industry-standard protocols such as Modbus, EtherNet/IP, and ASCII, in addition to the Gocator protocol)
- Digital
- Analog
- Serial interfaces


An important concept is digital output tracking. Different production lines can place an ejection or sorting mechanism at different distances from where the sensor scans the target. For this reason, Gocator lets you schedule a delayed decision over the digital interfaces. Because the conveyor system on a typical production line will use an encoder or have a known, constant speed, targets can effectively be “tracked” or "tagged." Gocator will know when a defective part has traveled far enough and trigger a PLC to activate an ejection/sorting mechanism at the correct moment. For more information on digital output tracking, see *Digital Output* on page 233.

Gocator Web Interface

The following sections describe the Gocator web interface.

User Interface Overview

Gocator sensors are configured by connecting to a *Main* sensor with a web browser. The Gocator web interface is illustrated below.

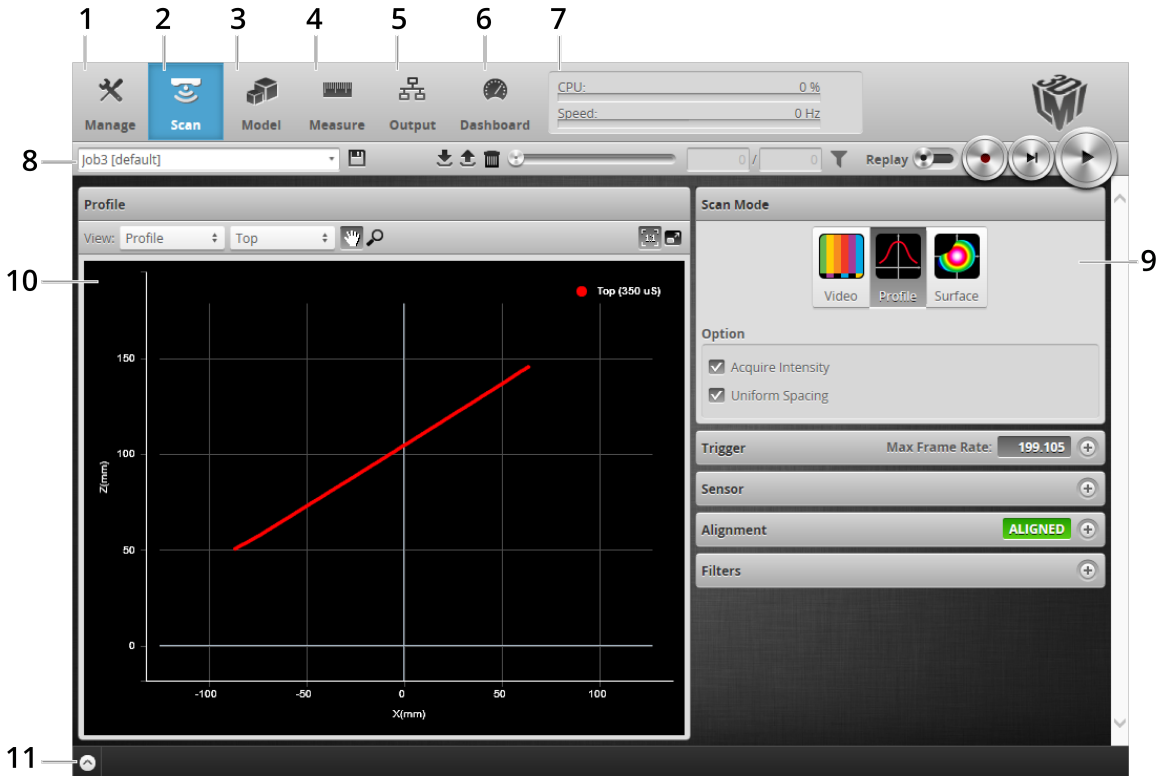


	Element	Description
1	Manage page	Contains settings for sensor system layout, network, motion and alignment, handling jobs, and sensor maintenance. See *System Management and Maintenance* on page 65.
2	Scan page	Contains settings for scan mode, trigger source, detailed sensor configuration, and performing alignment. See *Scan Setup and Alignment* on page 81.
3	Model page	Lets you set up part matching. See *Models* on page 127
4	Measure page	Contains built-in measurement tools and their settings. See *Measurement*

	Element	Description
		on page 148.
5	Output page	Contains settings for configuring output protocols used to communicate measurements to external devices. See *Output* on page 229.
6	Dashboard page	Provides monitoring of measurement statistics and sensor health. See *Dashboard* on page 241.
7	CPU Load and Speed	Provides important sensor performance metrics. See *Metrics Area* on page 64.
8	Toolbar	Controls sensor operation, manages jobs, and filters and replays recorded measurement data. See *Toolbar* below.
9	Configuration area	Provides controls to configure scan and measurement tool settings.
10	Data viewer	Displays sensor data, tool setup controls, and measurements. See *Data Viewer* on page 115 for its use when the **Scan** page is active and on page 149 for its use when the **Measure** page is active.
11	Log	Displays messages from the sensor (errors, warnings, and other information). See *Log* on page 63.

Toolbar

The toolbar is used for performing operations such as managing jobs, working with replay data, and starting and stopping the sensor.

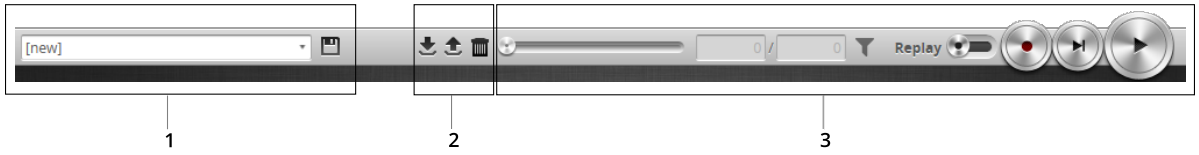

	Element	Description
1	Job controls	For saving and loading jobs.
2	Replay data controls	For downloading, uploading, and exporting recorded data.
3	Sensor operation / replay control	Use the sensor operation controls to start sensors, enable and filter recording, and control recorded data.

Creating, Saving and Loading Jobs (Settings)

A Gocator can store several hundred jobs. Being able to switch between jobs is useful when a Gocator is used with different constraints during separate production runs. For example, width decision minimum and maximum values might allow greater variation during one production run of a part, but might allow less variation during another production run, depending on the desired grade of the part.

Most of the settings that can be changed in the Gocator's web interface, such as the ones in the **Manage**, **Measure**, and **Output** pages, are temporary until saved in a job file. Each sensor can have multiple job files. If there is a job file that is designated as the default, it will be loaded automatically when the sensor is reset.

When you change sensor settings using the Gocator web interfacein the emulator, some changes are saved automatically, while other changes are temporary until you save them manually. The following table lists the types of information that can be saved in a sensor.

Setting Type	Behavior
Job	Most of the settings that can be changed in the Gocator's web interface, such as the ones in the **Manage**, **Measure**, and **Output** pages, are temporary until saved in a job file. Each sensor can have multiple job files. If there is a job file that is designated as the default, it will be loaded automatically when the sensor is reset.
Alignment	Alignment can either be fixed or dynamic, as controlled by the **Alignment Reference** setting in **Motion and Alignment** in the **Manage** page. Alignment is saved automatically at the end of the alignment procedure when **Alignment Reference** is set to **Fixed**. When **Alignment Reference** is set to **Dynamic**, however, you must manually save the job to save alignment.
Network Address	Network address changes are saved when you click the **Save** button in **Networking** on the **Manage** page. The sensor must be reset before changes take effect.

The job drop-down list in the toolbar shows the jobs stored in the sensor. The job that is currently active is listed at the top. The job name will be marked with "[unsaved]" to indicate any unsaved changes.



To create a job:

1. Choose **[New]** in the job drop-down list and type a name for the job.
2. Click the **Save** button or press **Enter** to save the job.
   The job is saved to sensor storage using the name you provided. Saving a job automatically sets it as the default, that is, the job loaded when then sensor is restarted.

To save a job:

- Click the **Save** button.

  The job is saved to sensor storage. Saving a job automatically sets it as the default, that is, the job loaded when then sensor is restarted.

To load (switch) jobs:

- Select an existing file name in the job drop-down list.


  The job is activated. If there are any unsaved changes in the current job, you will be asked whether you want to discard those changes.

You can perform other job management tasks—such as downloading job files from a sensor to a computer, uploading job files to a sensor from a computer, and so on—in the **Jobs** panel in the **Manage** page. See *Jobs* on page 72 for more information.

Recording, Playback, and Measurement Simulation

Gocator sensors can record and replay recorded scan data, and also simulate measurement tools on recorded data. This feature is most often used for troubleshooting and fine-tuning measurements, but can also be helpful during setup.

Recording and playback are controlled using the toolbar controls.

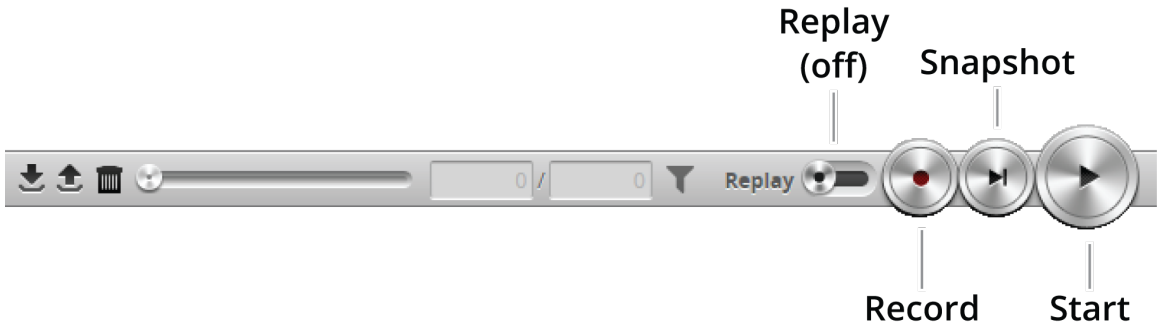

Recording and playback controls when replay is off

To record live data:


1. Toggle **Replay** mode off by setting the slider to the left in the **Toolbar**.
2. (Optional) Configure recording filtering.
   For more information on recording filtering, see *Recording Filtering* on page 60.
3. Click the **Record** button to enable recording.

   The center of the Record button turns red.

   When recording is enabled (and replay is off), the sensor will store the most recent data as it runs. Remember to disable recording if you no longer want to record live data. (Press the **Record** button again to disable recording).
4. Press the **Snapshot** button or **Start** button.
   The **Snapshot** button records a single frame. The **Start** button will run the sensor continuously and all frames will be recorded, up to available memory. When the memory limit is reached, the oldest data will be discarded.

> Newly recorded data is appended to existing replay data unless the sensor job has been modified.

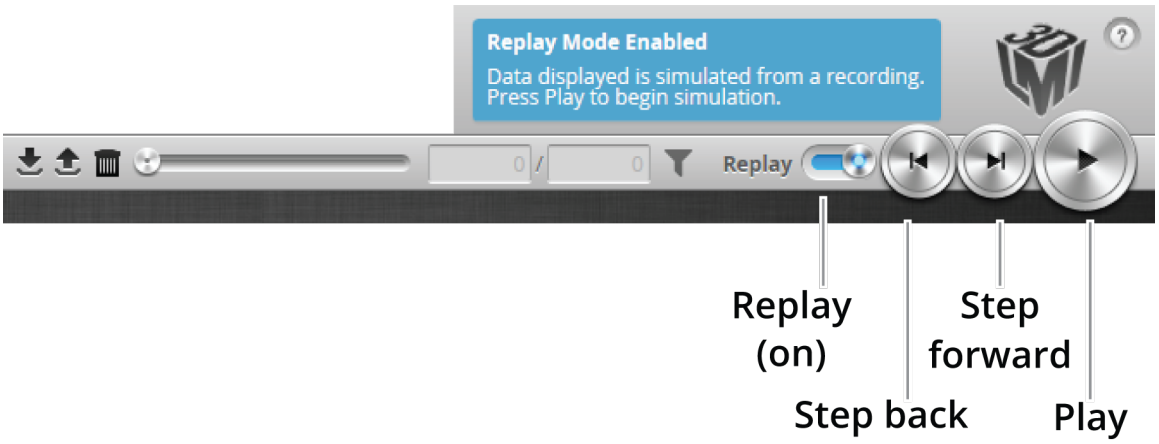

Playback controls when replay is on

To replay data:

1. Toggle **Replay** mode on by setting the slider to the right in the **Toolbar**.
   The slider's background turns blue and a Replay Mode Enabled message is displayed.
2. Use the **Replay** slider or the **Step Forward**, **Step Back**, or **Play** buttons to review data.
   The **Step Forward** and **Step Back** buttons move and the current replay location backward and forward by a single frame, respectively.
   The **Play** button advances the replay location continuously, animating the playback until the end of the replay data.
   The **Stop** button (replaces the **Play** button while playing) can be used to pause the replay at a particular location.
   The **Replay** slider (or **Replay Position** box) can be used to go to a specific replay frame.

To simulate measurements on replay data:


1. Toggle **Replay** mode on by setting the slider to the right in the **Toolbar**.
   The slider's background turns blue and a Replay Mode Enabled message is displayed.
   To change the mode, **Replay Protection** must be unchecked.
2. Go to the **Measure** page.
   Modify settings for existing measurements, add new measurement tools, or delete measurement tools as desired. For information on adding and configuring measurements, see *Measurement* on page 148.
3. Use the **Replay Slider**, **Step Forward**, **Step Back**, or **Play** button to simulate measurements.
   Step or play through recorded data to execute the measurement tools on the recording.
   Individual measurement values can be viewed directly in the data viewer. Statistics on the measurements that have been simulated can be viewed in the **Dashboard** page; for more information on the dashboard, see *Dashboard* on page 241.

To clear replay data:

1. Stop the sensor if it is running by clicking the **Stop** button.
2. Click the **Clear Replay Data** button .

Recording Filtering

Replay data is often used for troubleshooting. But replay data can contain thousands of frames, which makes finding a specific frame to troubleshoot difficult. Recording filtering lets you choose which frames Gocator records, based on one or more conditions, which makes it easier to find problems.

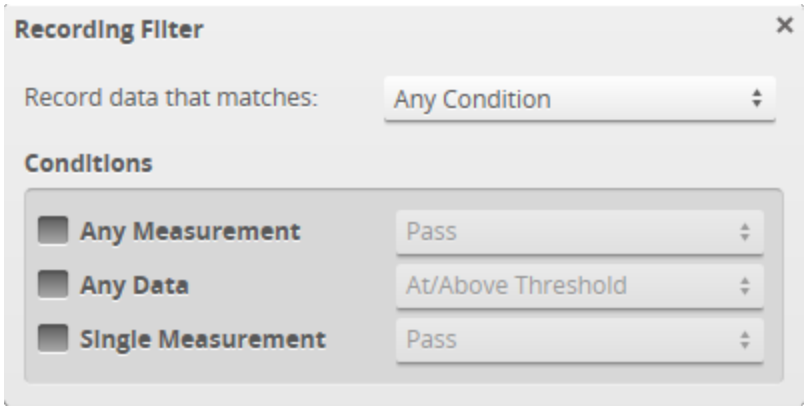

How Gocator treats conditions

Setting	Description
Any Condition	Gocator records a frame when any condition is true.
All Conditions	Gocator only records a frame if all conditions are true.

Conditions

Setting	Description
Any Measurement	Gocator records a frame when *any* measurement is in the state you select. The following states are supported: • pass • fail • valid • invalid • fail or invalid
Any Data	**At/Above Threshold**: Gocator records a frame if the number of valid points in the frame is above the value you specify in **Range Count Threshold**. **Below Threshold**: Gocator records a frame if the number of valid points is below the threshold you specify. In Surface mode, the number of valid points in the surface is compared to the threshold, not any sections that may be defined.
Single Measurement	Gocator records a frame if the measurement with the ID you specify in **ID** is in the state you select. The following states are supported: • pass • fail • valid • invalid • fail or invalid

To set recording filtering:

1. Make sure recording is enabled by clicking the Record button.



2. Click the Recording Filtering button .
3. In the Recording Filtering dialog, choose how Gocator treats conditions:

   For information on the available setting, see *How Gocator treats conditions* on the previous page.
4. Configure the conditions that will cause Gocator to record a frame:

   For information on the available setting, see *Conditions* on the previous page.
5. Click the "x" button or outside of the Recording Filtering dialog to close the dialog.

   The recording filter icon turns green to show that recording filters have been set.


   When you run the sensor, Gocator only records the frames that satisfy the conditions you have set.

Downloading, Uploading, and Exporting Replay Data

Replay data (recorded scan data) can be downloaded from a Gocator to a client computer, or uploaded from a client computer to a Gocator.

Data can also be exported from a Gocator to a client computer in order to process the data using third-party tools.

> You can only upload replay data to the same sensor model that was used to create the data.

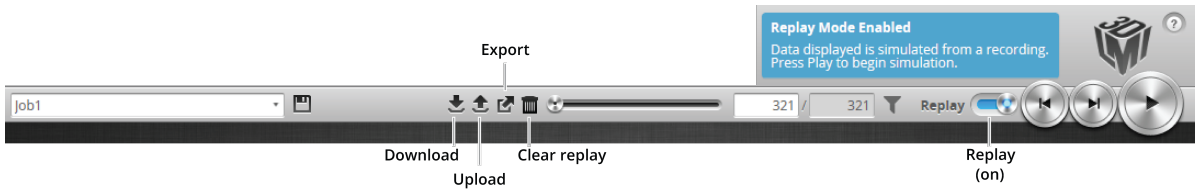

> Replay data is not loaded or saved when you load or save jobs.


To download replay data:

- Click the Download button .

To upload replay data:

1. Click the Upload button .


   If you have unsaved changes in the current job, the firmware asks whether you want to discard the changes.

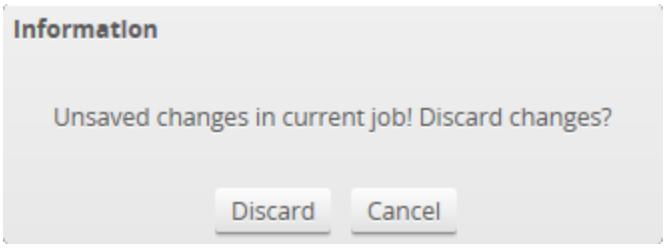

Do one of the following:

- Click **Discard** to discard any unsaved changes.

  The Upload menu appears.

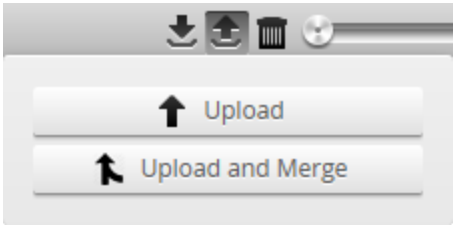


- Click **Cancel** to return to the main window to save your changes.

2. In the Upload menu, choose one of the following:
   - **Upload**: Unloads the current job and creates a new unsaved and untitled job from the content of the replay data file.
   - **Upload and merge**: Uploads the replay data and merges the data's associated job with the current job. Specifically, the settings on the **Scan** page are overwritten, but all other settings of the current job are preserved, including any measurements or models.
3. Navigate to the replay data to upload from the client computer and click **OK**.
   The replay data is loaded, and a new unsaved and untitled job is created.

Replay data can be exported using the CSV format. If you have enabled **Acquire Intensity** in the **Scan Mode** panel on the **Scan** page, the exported CSV file includes intensity data.

> *Surface* intensity data cannot be exported to the CSV format. It can only be exported separately as a bitmap.

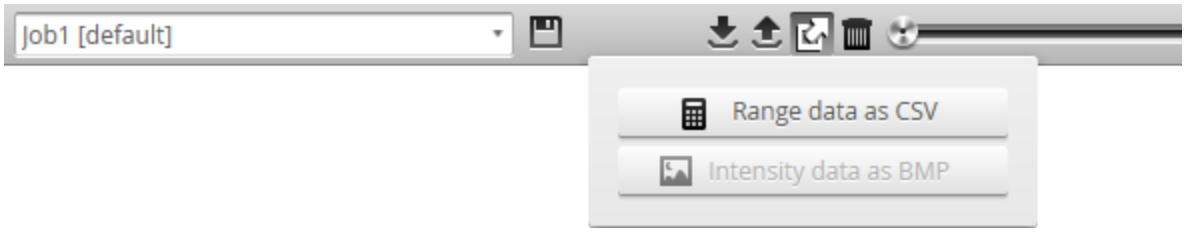

To export replay data in the CSV format:


1. Click the Export button and select **Export Range Data as CSV**.

In Profile mode, all data in the record buffer is exported. In Surface mode, only data at the current replay location is exported.
Use the playback control buttons to move to a different replay location; for information on playback, see *To replay data* in *Recording, Playback, and Measurement Simulation* on page 58.

2. Optionally, convert exported data to another format using the CSV Converter Tool. For information on this tool, see *CSV Converter Tool* on page 429.

> The decision values in the exported data depend on the *current* state of the job, not the state during recording. For example, if you record data when a measurment returns a *pass* decision, change the measurement's settings so that a *fail* decision is returned, and then export to CSV, you will see a *fail* decision in the exported data.

Recorded intensity data can be exported to a bitmap (.BMP format). **Acquire Intensity** must be checked in the **Scan Mode** panel while data was being recorded in order to export intensity data.

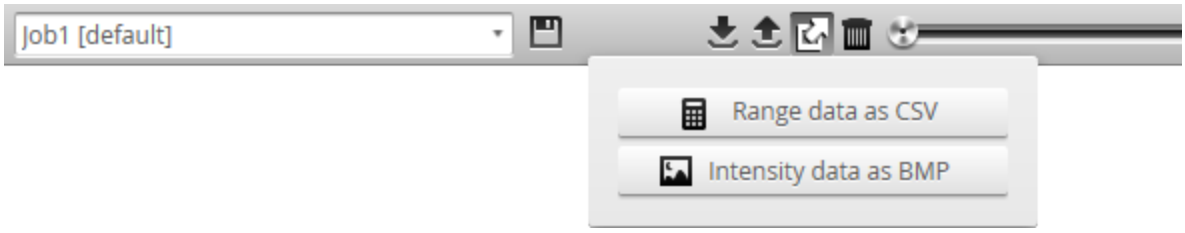


To export recorded intensity data to the BMP format:

- Click the **Export** button and select **Intensity data as BMP**.

  Only the intensity data in the current replay location is exported.
  Use the playback control buttons to move to a different replay location; for information on playback, see *To replay data* in *Recording, Playback, and Measurement Simulation* on page 58.

Log

The log, located at the bottom of the web interface, is a centralized location for all messages that the Gocator displays, including warnings and errors.

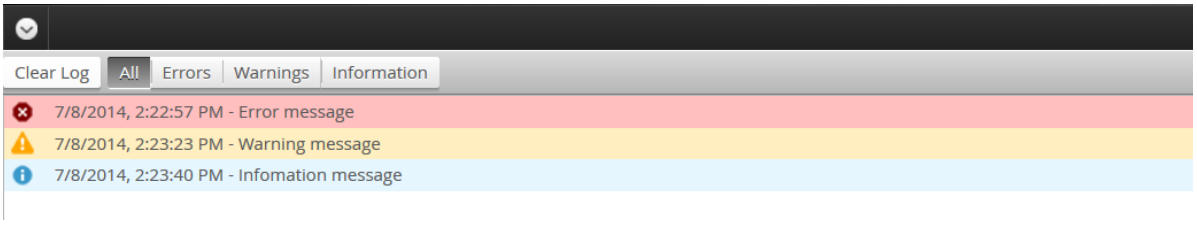

A number indicates the number of unread messages:




To use the log:

1. Click on the Log open button at the bottom of the web interface.
2. Click on the appropriate tab for the information you need.

Metrics Area

The **Metrics** area displays two important sensor performance metrics: CPU load and speed (current frame rate).

The **CPU** bar in the **Metrics** panel (at the top of the interface) displays how much of the CPU is being utilized. A warning symbol (⚠) will appear next to the **CPU** bar if the sensor drops profiles because the CPU is over-loaded.



CPU at 100%

The **Speed** bar displays the frame rate of the sensor. A warning symbol (⚠) will appear next to it if triggers (external input or encoder) are dropped because the external rate exceeds the maximum frame rate.

Open the log for details on the warning. See *Log* on the previous page for more information.

Data Viewer

The data viewer is displayed in both the **Scan** and the **Measure** pages, but displays different information depending on which page is active.

When the **Scan** page is active, the data viewer displays sensor data and can be used to adjust the active area and other settings. Depending on the selected operation mode (page 82), the data viewer can display video images, profiles, sections, or surfaces. For details, see *Data Viewer* on page 115.

When the **Measure** page is active, the data viewer displays sensor data onto which representations of measurement tools and their measurements are superimposed. For details, see *Data Viewer* on page 149.


> Because Gocator 2880 has two cameras, two profiles are displayed in the Gocator web interface.

System Management and Maintenance

The following sections describe how to set up the sensor connections and networking, how to calibrate encoders and choose alignment reference, and how to perform maintenance tasks.

Manage Page Overview


Gocator's system and maintenance tasks are performed on the **Manage** page.

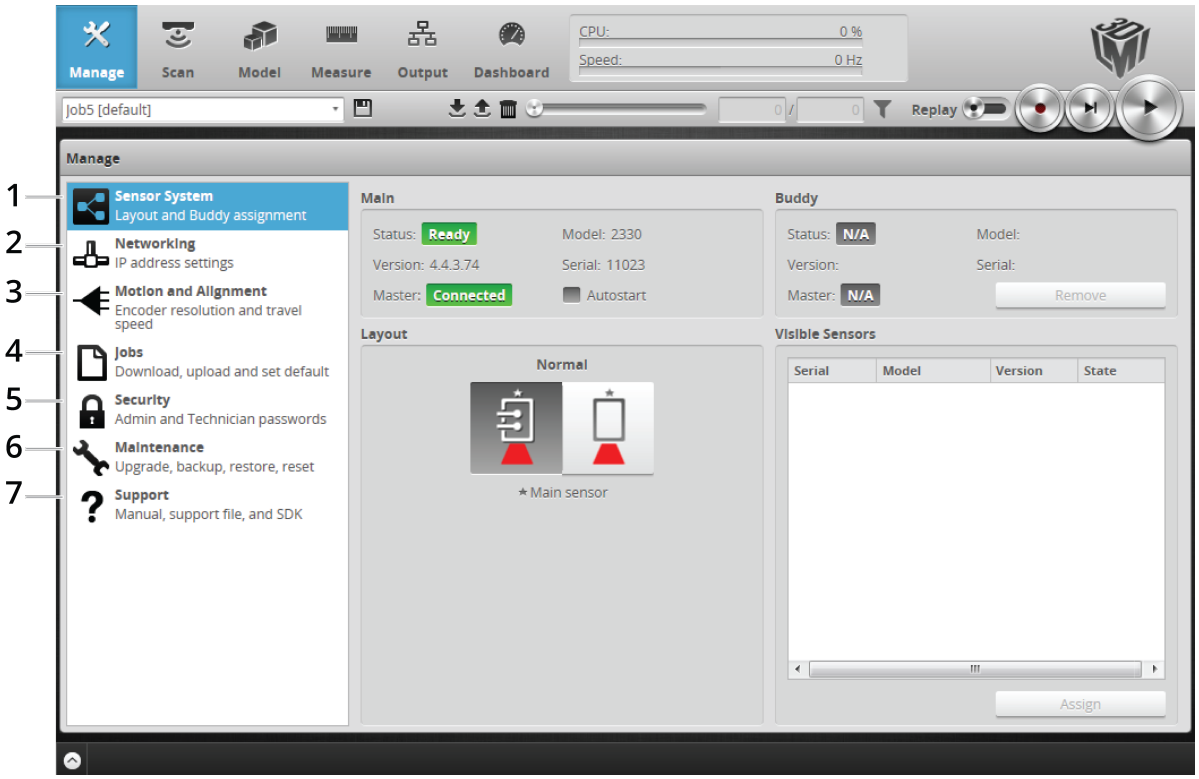

	Element	Description
1	Sensor System	Contains settings for configuring sensor system and layout, and boot-up. See *Sensor System* on the next page.
2	Networking	Contains settings for configuring the network. See *Networking* on page 70.
3	Motion and Alignment	Contains settings to configure the encoder. See *Motion and Alignment* on page 70.
4	Jobs	Lets you manage jobs stored on the sensor. See *Jobs* on page 72.
5	Security	Lets you change passwords. See *Security* on page 74.
6	Maintenance	Lets you upgrade firmware, create/restore backups, and reset sensors. See *Maintenance* on page 75.
7	Support	Lets you open an HTML version or download a PDF version of the manual, download the SDK, or save a support file. Also provides device information. See *Support* on page 78

Sensor System


The following sections describe the **Sensor System** category on the **Manage** page. This category lets you choose the layout standalone or dual-sensor systems, and provides other system settings.

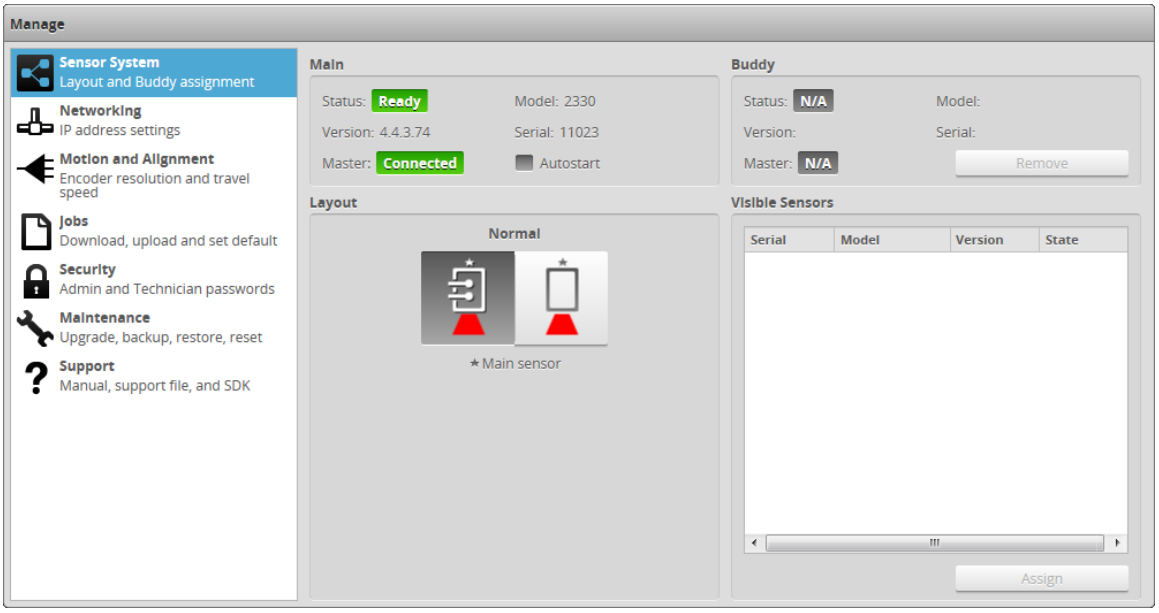

Dual-sensor layouts are only displayed when a Buddy sensor has been assigned.

Sensor Autostart

With the **Autostart** setting enabled, laser ranging profiling and measurement functions will begin automatically when the sensor is powered on. Autostart must be enabled if the sensor will be used without being connected to a computer.

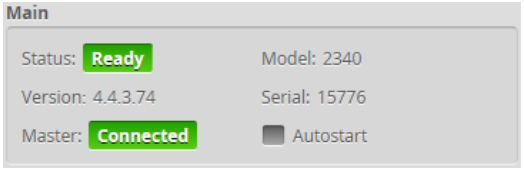






To enable/disable Autostart:

1. Go to the **Manage** page and click on the **Sensor System** category.
2. Check/uncheck the **Autostart** option in the **Main** section.

System Layout

Mounting orientations must be specified for a sensor systems. This information allows the alignment procedure to determine the correct system-wide coordinates for laser profiling and measurements. See *Coordinate Systems* on page 46 for more information on sensor and system coordinates.

Supported Layouts

	Orientation	Example
	**Normal** The sensor operates as an isolated device.	
	**Reverse** The sensor operates as an isolated device, but in a reverse orientation. You can use this layout to change the handedness of the data.	
	**Wide** Sensors are mounted in Left (Main) and Right (Buddy) positions for a larger combined field of view. Sensors may be angled to avoid occlusions.	 
	**Reverse** Sensors are mounted in a left-right layout as with the Wide layout, but the Buddy sensor is mounted such that it is rotated 180 degrees around the Z axis to prevent occlusion along the Y axis. Sensors should be shifted along the Y axis so that the laser lines align.	
	**Opposite** Sensors are mounted in Top (Main) and Bottom (Buddy) positions for a larger combined measurement range and the ability to perform Top/Bottom differential measurements.	

To specify the layout:


1. Go to the **Manage** page and click on the **Sensor System** category.
2. If you are configuring the layout of a dual-sensor system, select an assigned Buddy sensor in the **Visible Sensors** list.
   For information on assigning a Buddy sensor, see *Buddy Assignment* below.
3. Select a layout by clicking one of the layout buttons.
   See the table above for information on layouts.

Buddy Assignment

In a dual-sensor system, the *Main* sensor controls a second sensor, called the *Buddy* sensor, after the Buddy sensor is assigned to the Main sensor. You configure both sensors through the Main sensor's interface.

> Main and Buddy sensors must be assigned unique IP addresses before they can be used on the same network. Before proceeding, connect the Main and Buddy sensors one at a time (to avoid an address conflict) and use the steps described in Running a Dual-Sensor System (page 30) to assign each sensor a unique address.


> When a sensor is acting as a Buddy, it is not discoverable and its web interface is not accessible.

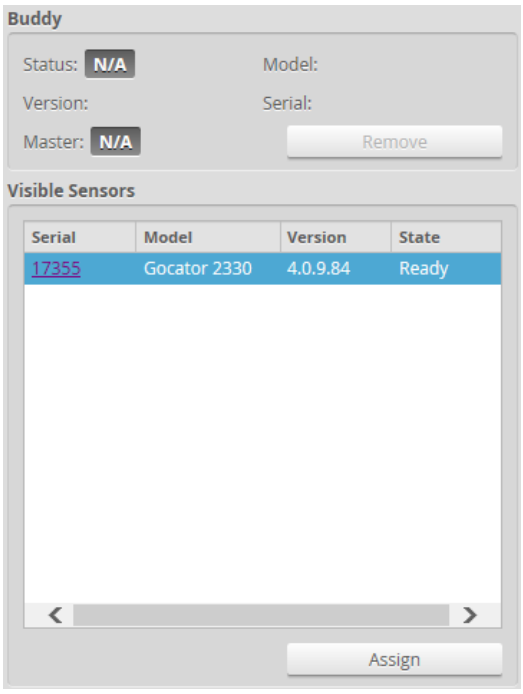

To assign a Buddy sensor:

1. Go to the **Manage** page and click on the **Sensor System** category.


2. Select a sensor in the **Visible Sensors** list.
3. Click the **Assign** button.
   A sensor can only be assigned as a Buddy if its firmware and model number match the firmware and model number of the Main sensor. The **Assign** button will be greyed out if a sensor cannot be assigned as a Buddy.
   The Buddy sensor is assigned to the Main sensor and its status is updated in the **System** panel.

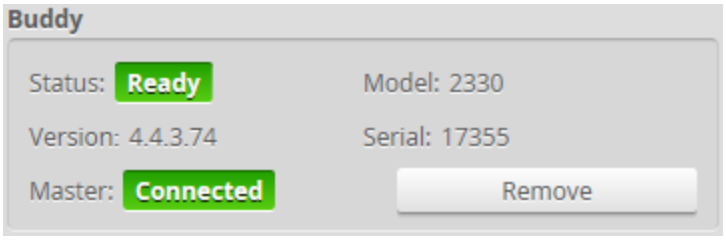

To remove a Buddy, click **Remove**.

Exposure Multiplexing

If the Main and Buddy sensors are mounted such that the camera from one sensor can detect the laser from the other sensor, the **Exposure Multiplexing** option can be used to eliminate laser interference. This setting creates a time offset for laser exposures and ensures that interfering lasers are not strobed at the same time. Using the **Exposure Multiplexing** option may reduce the maximum frame rate.

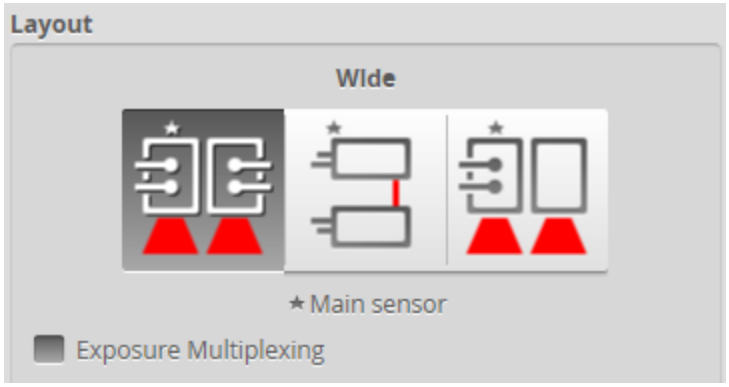

To enable/disable exposure multiplexing:

1. Go to the **Manage** page and click on the **Sensor System** category.
2. In the Layout section, check/uncheck the **Exposure Multiplexing** option.
   This option is only displayed if a buddy is assigned.

Over Temperature Protection

Sensors equipped with a 3B-N laser by default will turn off the laser if the temperature exceeds the safe operating range. You can override the setting by disabling the overheat protection.

⚠	Disabling the setting is not recommended. Disabling the overheat protection feature could lead to premature laser failure if the sensor operates outside the specified temperature range.




To enable/disable overheat temperature protection:

1. Check/uncheck the **Over Temperature Protection** option.
2. Save the job file.

Networking

The **Networking** category on the **Manage** page provides network settings. Settings must be configured to match the network to which the Gocator sensors are connected.

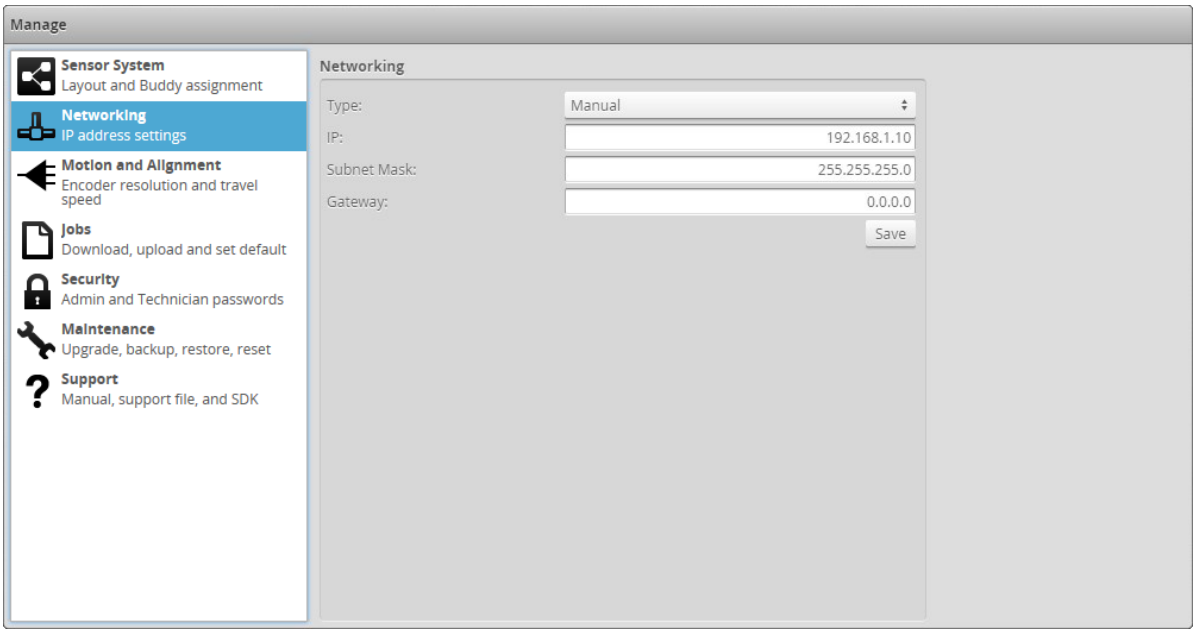


To configure the network settings:

1. Go to the **Manage** page.
2. In the **Networking** category, specify the Type, IP, Subnet Mask, and Gateway settings.
   The Gocator sensor can be configured to use DHCP or assigned a static IP address.
3. Click on the **Save** button.
   You will be prompted to confirm your selection.


Motion and Alignment

The **Motion and Alignment** category on the **Manage** page lets you configure alignment reference, encoder resolution, and travel speed.

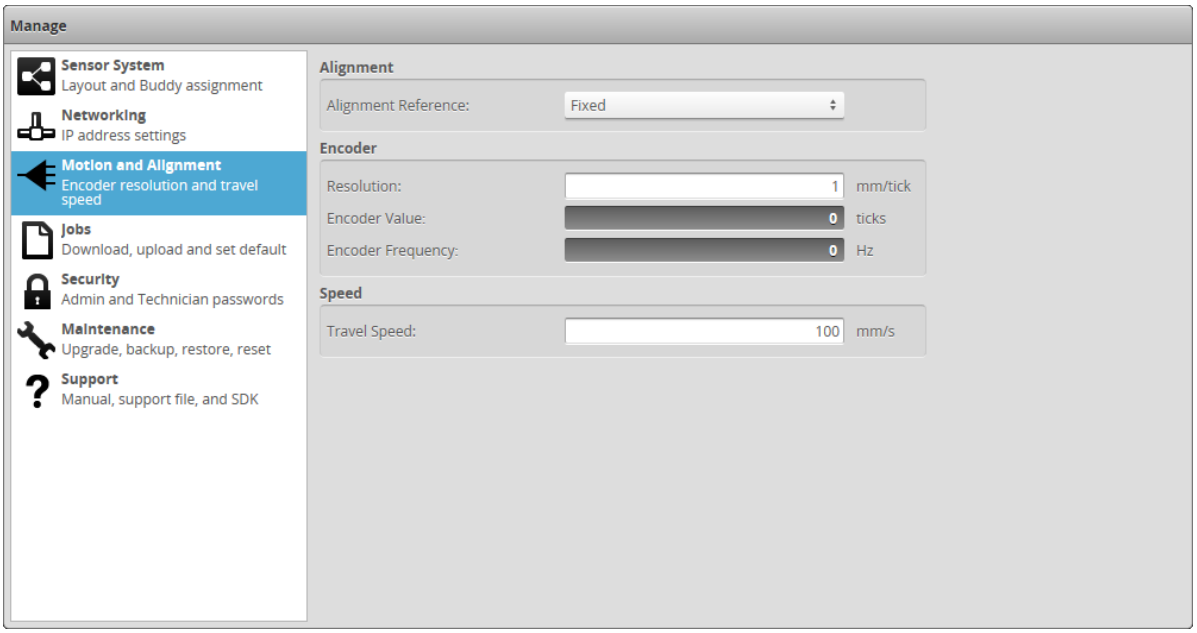

Alignment Reference

The **Alignment Reference** setting can have one of two values: **Fixed** or **Dynamic**.

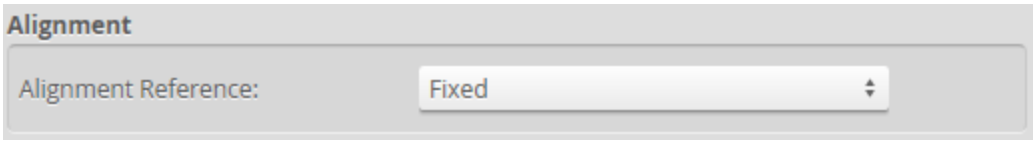

Setting	Description
Fixed	A single, global alignment is used for all jobs. This is typically used when the sensor mounting is constant over time and between scans, for example, when the sensor is mounted in a permanent position over a conveyor belt.
Dynamic	A separate alignment is used for each job. This is typically used when the sensor's position relative to the object scanned is always changing, for example, when the sensor is mounted on a robot arm moving to different scanning locations.

To configure alignment reference:

1. Go to the **Manage** page and click on the **Motion and Alignment** category.
2. In the Alignment section, choose **Fixed** or **Dynamic** in the **Alignment Reference** drop-down.

Encoder Resolution

You can manually enter the encoder resolution in the **Resolution** setting , or it can be automatically set by performing an alignment with **Type** set to **Moving**. Establishing the correct encoder resolution is required for correct scaling of the scan of the target object in the direction of travel.



Encoder resolution is expressed in millimeters per tick, where one tick corresponds to *one* of the four encoder quadrature signals (A+ / A- / B+ / B-).

> Encoders are normally specified in *pulses* per revolution, where each pulse is made up of the four quadrature *signals* (A+ / A- / B+ / B-). Because Gocator reads each of the four quadrature signals, you should choose an encoder accordingly, given the resolution required for your application.

To configure encoder resolution:

1. Go to the **Manage** page and click on the **Motion and Alignment** category.
2. In the **Encoder** section, enter a value in the **Resolution** field.

Encoder Value and Frequency

The encoder value and frequency are used to confirm the encoder is correctly wired to the Gocator and to manually calibrate encoder resolution (that is, by moving the conveyor system a known distance and making a note of the encoder value at the start and end of movement).

Travel Speed

The **Travel Speed** setting is used to correctly scale scans in the direction of travel in systems that lack an encoder but have a conveyor system that is controlled to move at constant speed. Establishing the correct travel speed is required for correct scaling of the scan in the direction of travel.



Travel speed is expressed in millimeters per second.


To manually configure travel speed:

1. Go to the **Manage** page and click on the **Motion and Alignment** category.
2. In the **Speed** section, enter a value in the **Travel Speed** field.

Travel speed can also be set automatically by performing an alignment with **Type** set to **Moving** (see *Aligning Sensors* on page 101).


Jobs

The **Jobs** category on the **Manage** page lets you manage the jobs stored on a sensor.

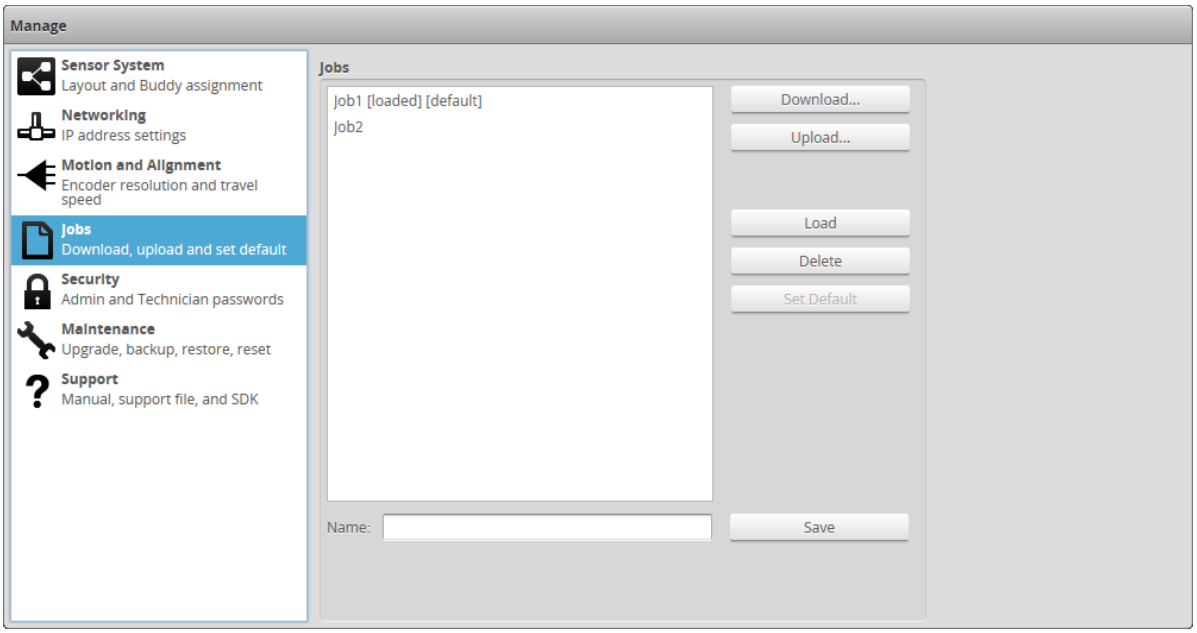


Element	Description
Name field	Used to provide a job name when saving files.
Jobs list	Displays the jobs that are currently saved in the sensor's flash storage.
Save button	Saves current settings to the job using the name in the **Name** field.
Load button	Loads the job that is selected in the job list. Reloading the current job discards any unsaved changes.
Delete button	Deletes the job that is selected in the job list.
Set as Default button	Sets the selected job as the default to be loaded when the sensor starts. When the default job is selected, this button is used to clear the default.
Download... button	Downloads the selected job to the client computer.
Upload... button	Uploads a job from the client computer.

Jobs can be loaded (currently activated in sensor memory) and set as default independently. For example, Job1 could be loaded, while Job2 is set as the default. Default jobs load automatically when a sensor is power cycled or reset.

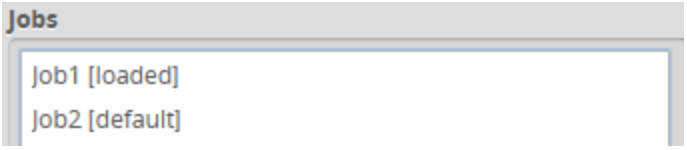

Unsaved jobs are indicated by "[unsaved]".

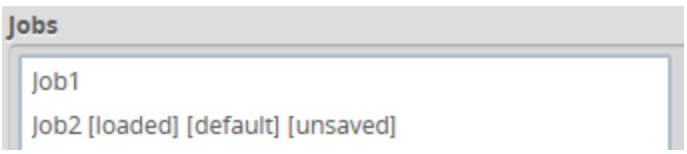

To save a job:


1. Go to the **Manage** page and click on the **Jobs** category.
2. Provide a name in the **Name** field.
   To save an existing job under a different name, click on it in the **Jobs** list and then modify it in the **Name** field.
3. Click on the **Save** button or press **Enter**.
   Saving a job automatically sets it as the default, that is, the job loaded when then sensor is restarted.

To download, load, or delete a job, or to set one as a default, or clear a default:

1. Go to the **Manage** page and click on the **Jobs** category.
2. Select a job in the **Jobs** list.
3. Click on the appropriate button for the operation.

Security

Gocator sensors can be secured with passwords to prevent unauthorized access. Each sensor has two accounts: Administrator and Technician.

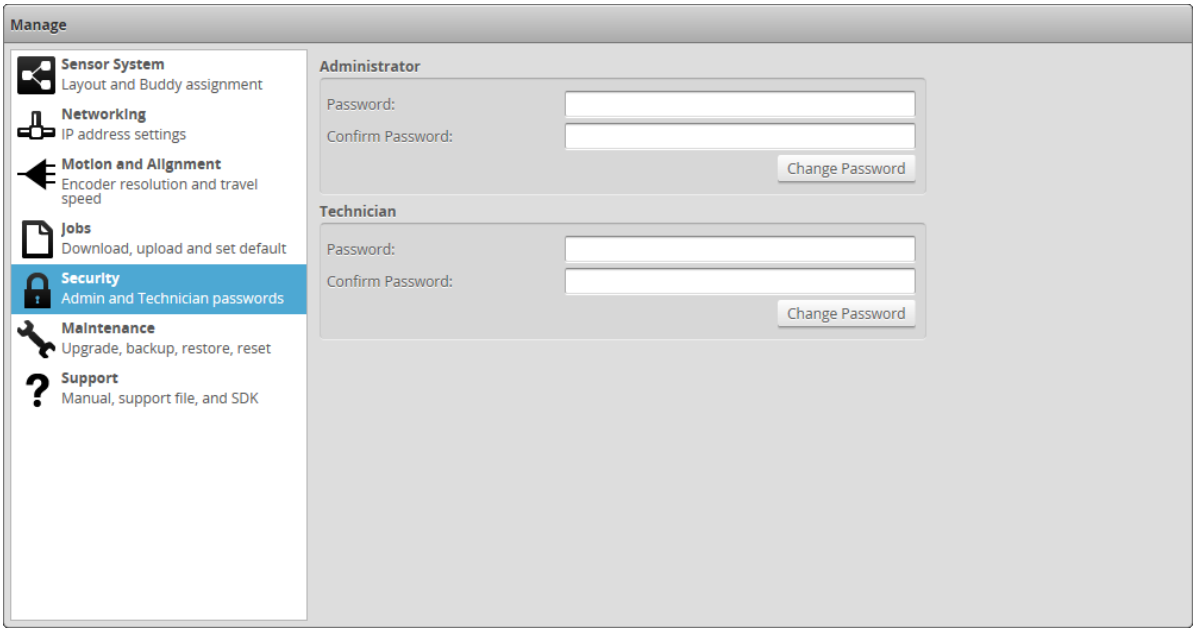

Gocator Account Types

Account	Description
Administrator	The Administrator account has privileges to use the toolbar (loading and saving jobs, recording and viewing replay data), to view all pages and edit all settings, and to perform setup procedures such as sensor alignment.
Technician	The Technician account has privileges to use the toolbar (loading and saving jobs, recording and viewing replay data), to view the **Dashboard** page, and to start or stop the sensor.

The Administrator and Technician accounts can be assigned unique passwords. By default, passwords are blank (empty).

To set or change the password for the Administrator account:

1. Go to the **Manage** page and click on the **Security** category.
2. In the **Administrator** section, enter the Administrator account password and password confirmation.
3. Click **Change Password**.
   The new password will be required the next time that an administrator logs in to the sensor.

To set or change the password for the Technician account:


1. Go to the **Manage** page and click on the **Security** category.
2. In the **Technician** section, enter the Technician account password and password confirmation.
3. Click **Change Password**.
   The new password will be required the next time that a technician logs in to the sensor.

If the administrator or technician password is misplaced, the sensor can be recovered using a special software tool. See *Sensor Recovery Tool* on page 410 for more information.

Maintenance

The **Maintenance** category in the **Manage** page is used to do the following:

- upgrade the firmware and check for firmware updates;
- back up and restore all saved jobs and recorded data;
- restore the sensor to factory defaults;
- reset the sensor.

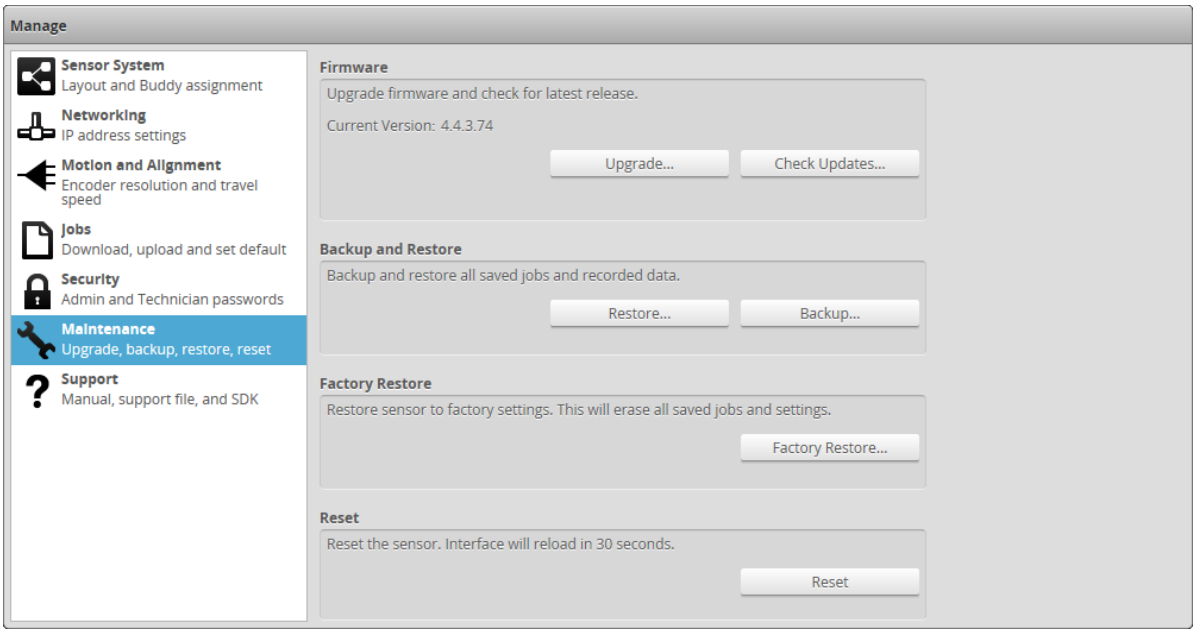


Sensor Backups and Factory Reset

You can create sensor backups, restore from a backup, and restore to factory defaults in the **Maintenance** category.


Backup files contain all of the information stored on a sensor, including jobs and alignment.

> An Administrator should create a backup file in the unlikely event that a sensor fails and a replacement sensor is needed. If this happens, the new sensor can be restored with the backup file.

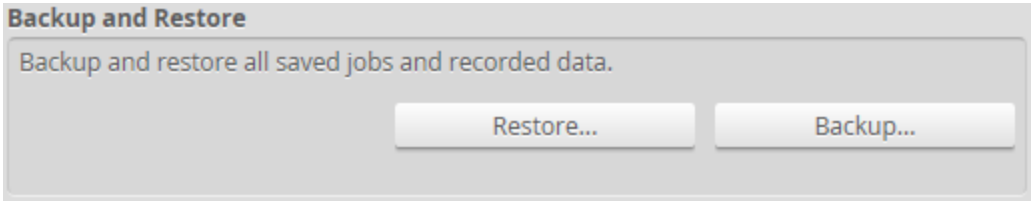

To create a backup:

1. Go to the **Manage** page and click on the **Maintenance** category.
2. Click the **Backup...** button under **Backup and Restore**.
3. When you are prompted, save the backup.
   Backups are saved as a single archive that contains all of the files from the sensor.

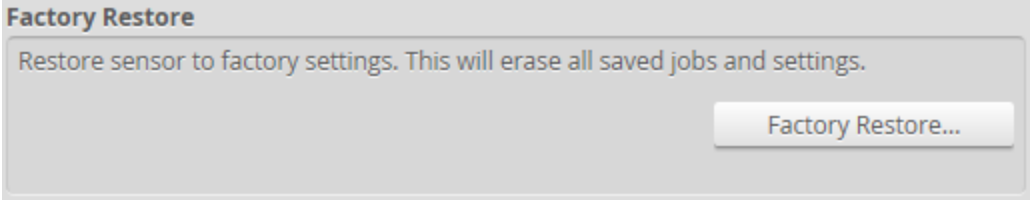

To restore from a backup:

1. Go to the **Manage** page and click on the **Maintenance** category.
2. Click the **Restore...** button under **Backup and Restore**.
3. When you are prompted, select a backup file to restore.
   The backup file is uploaded and then used to restore the sensor. Any files that were on the sensor before the restore operation will be lost.


To restore a sensor to its factory default settings:

1. Go to the **Manage** page and click on **Maintenance**.
2. Consider making a backup.
   Before proceeding, you should perform a backup. Restoring to factory defaults cannot be undone.
3. Click the **Factory Restore...** button under **Factory Restore**.
   You will be prompted whether you want to proceed.

Firmware Upgrade

LMI recommends routinely updating firmware to ensure that Gocator sensors always have the latest features and fixes.

> In order for the Main and Buddy sensors to work together, they must be use the same firmware version. This can be achieved by upgrading through the Main sensor or by upgrading each sensor individually.

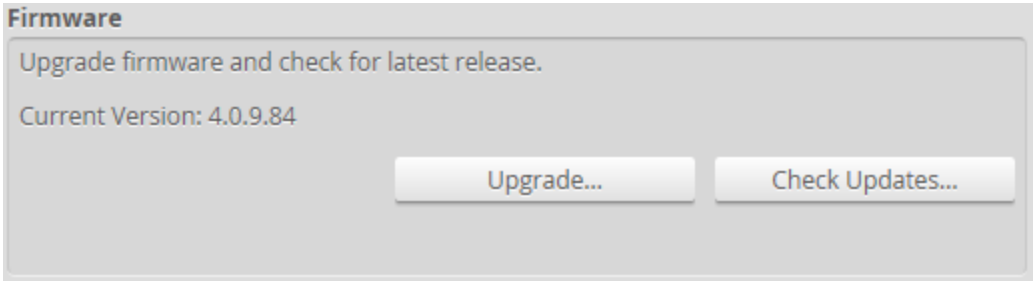

To download the latest firmware:

1. Go to the **Manage** page and click on the **Maintenance** category.
2. Click the **Check Updates...** button in the **Firmware** section.
3. Download the latest firmware.

If a new version of the firmware is available, follow the instructions to download it to the client computer.

If the client computer is not connected to the Internet, firmware can be downloaded and transferred to the client computer by using another computer to download the firmware from LMI's website: *http://www.lmi3D.com/support/downloads*.


To upgrade the firmware:

1. Go to the **Manage** page and click on the **Maintenance** category.
2. Click the **Upgrade...** button in the **Firmware** section.
3. Provide the location of the firmware file in the **File** dialog.
4. Wait for the upgrade to complete.
   After the firmware upgrade is complete, the sensor will self-reset. If a buddy has been assigned, it will be upgraded and reset automatically.

Support


The **Support** category in the **Manage** page is used to:

- open an HTML version or download a PDF version of the manual;
- download the SDK;
- save a support file;
- get device information.

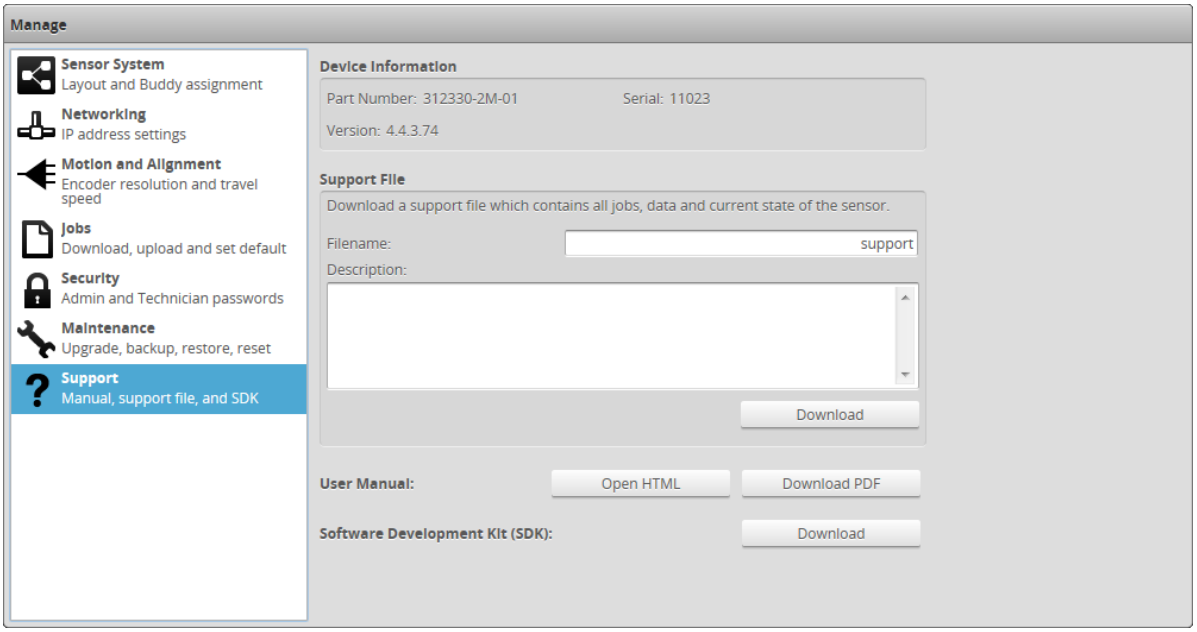

Support Files

You can download a support file from a sensor and save it on your computer. You can then use the support file to create a scenario in the Gocator emulator (for more information on the emulator, see *Gocator Emulator* on page 244). LMI's support staff may also request a support file to help in troubleshooting.

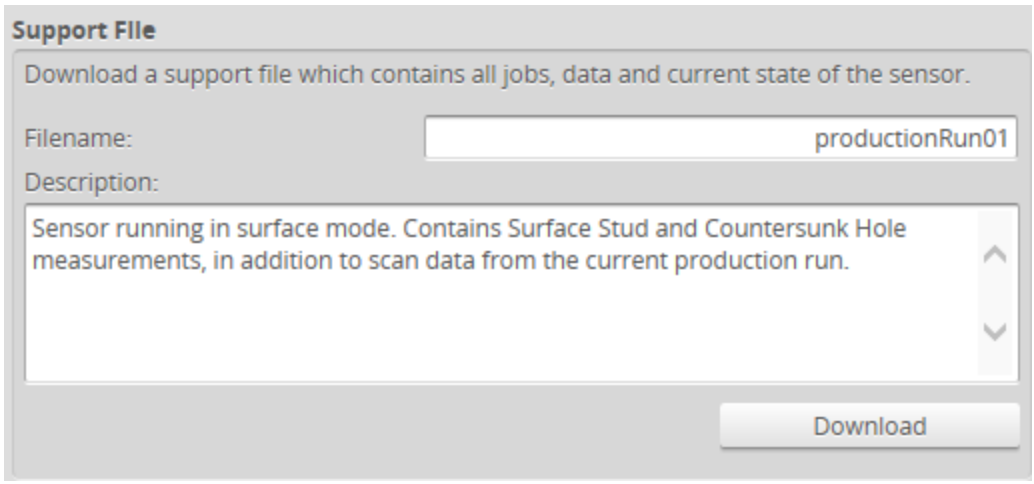

To download a support file:

1. Go to the **Manage** page and click on the **Support** category.
2. In **Filename**, type the name you want to use for the support file.


   When you create a scenario from a support file in the emulator, the filename you provide here is displayed in the emulator's scenario list.

   Support files end with the .gs extension, but you do not need to type the extension in **Filename**.
3. (Optional) In **Description**, type a description of the support file.

   When you create a scenario from a support file in the emulator, the description is displayed below the emulator's scenario list.
4. Click **Download**, and then when prompted, click **Save**.

Manual Access

You can access the Gocator manuals from within the Web interface.



To access the manuals:

1. Go to the **Manage** page and click on the **Support** category
2. Next to **User Manual**, click one of the following:
   - **Open HTML**: Opens the HTML version of the manual in your default browser.
   - **Download PDF**: Downloads the PDF version of the manual to the client computer.

Software Development Kit

You can download the Gocator SDK from within the Web interface.



To download the SDK:

1. Go to the **Manage** page and click on the **Support** category
2. Next to **Software Development Kit (SDK)**, click **Download**
3. Choose the location for the SDK on the client computer.


For more information on the SDK, see *Software Development Kit* on page 400.

Scan Setup and Alignment

The following sections describe the steps to configure Gocator sensors for laser profiling using the **Scan** page. Setup and alignment should be performed before adding and configuring measurements or outputs.

Scan Page Overview

The **Scan** page lets you configure sensors and perform alignment.

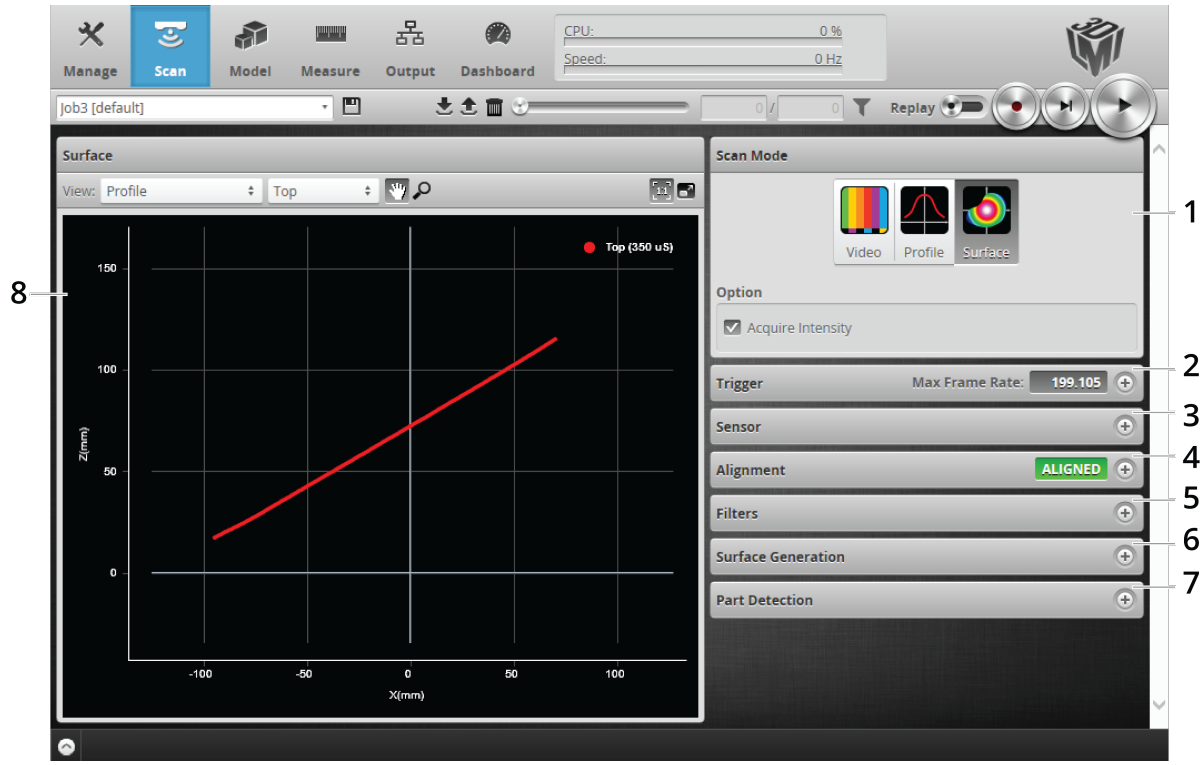

	Element	Description
1	Scan Mode panel	Contains settings for the current scan mode (Video, Profile, or Surface) and other options. See *Scan Modes* on the next page.
2	Trigger panel	Contains trigger source and trigger-related settings. See *Triggers* on page 83.
3	Sensor panel	Contains settings for an individual sensor, such as active area or exposure. See *Sensor* on page 88.
4	Alignment panel	Used to perform alignment. See *Alignment* on page 100.
5	Filters panel	Contains settings for post-processing of the profiles. See *Filters* on page 104.
6	Part Detection panel	Used to set the part detection logic for sorting profiles into discrete objects. See *Part Detection* on page 111.
7	Surface Generation panel	Contains settings for surface generation. See *Surface Generation* on page 107.


	Element	Description
8	Data Viewer	Displays sensor data and adjusts regions of interest. Depending on the current operation mode, the data viewer can display video images , profile plots, or surface views . See *Data Viewer* on page 115.

The following table provides quick references for specific goals that you can achieve from the panels in the **Scan** page.

Goal	Reference
Select a trigger source that is appropriate for the application.	Triggers (page 83)
Ensure that camera exposure is appropriate for laser profiling .	Exposure (page 92)
Find the right balance between profile quality, speed, and CPU utilization.	Active Area (page 88) Exposure (page 92) Job Files (page 257)
Specify mounting orientations for dual-sensor systems.	System Layout (page 66)
Calibrate the system so that laser profile data can be aligned to a common reference and values can be correctly scaled in the axis of motion.	Aligning Sensors (page 101)
Set up the part detection logic to create discrete objects from surfaces or profiles.	Part Detection (page 111)
Specify smoothing, gap-filling, and resampling parameters to remove effects of occlusions.	Filters (page 104)

Scan Modes

The Gocator web interface supports threescan modes: Video, Profile, and Surface. The scan mode can be selected in the **Scan Mode** panel.

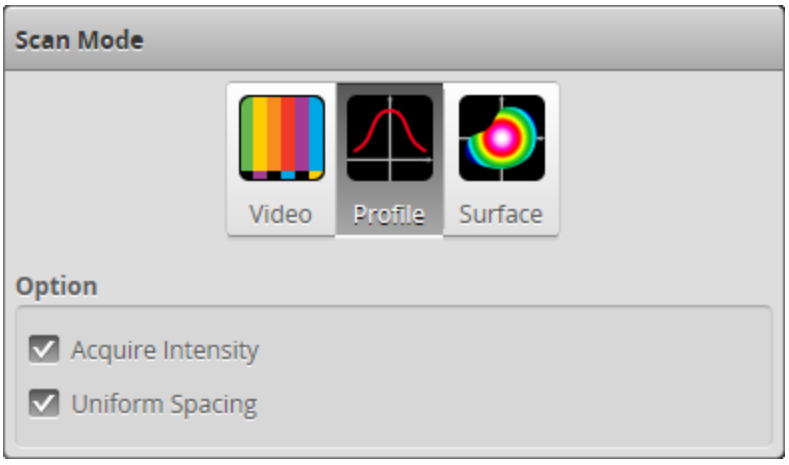

Mode and Option	Description
Video	Outputs video images from the Gocator. This mode is useful for configuring exposure time and troubleshooting stray light or ambient light problems.
Profile	Outputs profiles and performs profile measurements.

Mode and Option	Description
	Video images are processed internally to produce laser profiles and cross-sectional measurements.
Surface	Outputs 3D point clouds made up of many laser profiles combined together and performs surface measurements. The sensor uses various methods to generate a surface (see on page 107). Part detection can be enabled on a surface to identify discrete parts (see on page 111).
Uniform Spacing	When this option is enabled, ranges are resampled to a uniform spacing along the X axis (see on page 50 for more information). The size of the spacing can be set in the **Spacing** tab (see on page 97). When the option is disabled, the Gocator outputs unprocessed range data. Ranges are reported in (x,z) coordinate pairs. Post-profiling processing is disabled. Only a subset of the measurement tools is available. Disable this option to extract ranges from the Gocator at the highest possible rate. When the sensor is in Surface mode, this option is not available.
Acquire Intensity	When this option is enabled, an intensity value will be produced for each laser profile point.

Triggers


A trigger is an event that causes a sensor to take a single picture. Triggers are configured in the **Trigger** panel on the **Scan** page.

When a trigger is processed, the laser is strobed and the camera exposes to produce an image. The resulting image is processed inside the sensor to yield a profile (range/distance information), which can then be used for measurement.

The laser and camera inside a sensor can be triggered by one of the following sources:


Trigger Source	Description
Time	Sensors have an internal clock that can be used to generate fixed-frequency triggers. The external input can be used to enable or disable the time triggers.
Encoder	An encoder can be connected to provide triggers in response to motion. Three encoder triggering behaviors are supported. These behaviors are set using the **Behavior** setting. **Track Backward** A scan is triggered when the target object moves forward. If the target object moves backward, it must move forward by at least the distance that the target travelled backward (this distance backward is "tracked"), plus one encoder spacing, to trigger the next scan.

Trigger Source	Description

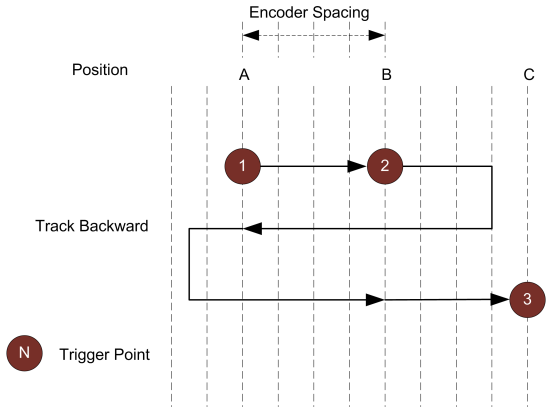


Ignore Backward

A scan is triggered only when the target object moves forward. If the target object moves backward, it must move forward by at least the distance of one encoder spacing to trigger the next scan.

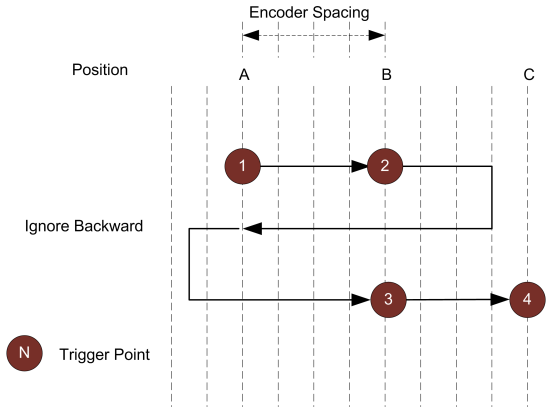

Bi-directional

A scan is triggered when the target object moves forward or backward.

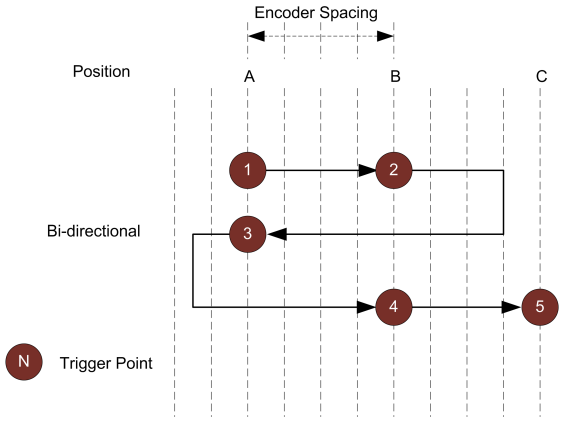

Trigger Source	Description
	When triggers are received at a frequency higher than the maximum frame rate, some triggers may not be accepted. The **Trigger Drops Indicator** in the **Dashboard** can be used to check for this condition. The external input can be used to enable or disable the encoder triggers. See *Encoder Input* on page 467 for more information on connecting the encoder to Gocator sensors.
External Input	A digital input can provide triggers in response to external events (e.g., photocell). When triggers are received at a frequency higher than the maximum frame rate, some triggers may not be accepted. The **Trigger Drops Indicator** in the **Dashboard** page can be used to check for this condition. See *Digital Inputs* on page 466 for more information on connecting external input to Gocator sensors.
Software	A network command can be used to send a software trigger. See *Protocols* on page 326 for more information.


For examples of typical real-world scenarios, see below. For information on the settings used with each trigger source, see on the next page

Trigger Examples

Example: Encoder + Conveyor

Encoder triggering is used to perform profile measurements at a uniform spacing.

The speed of the conveyor can vary while the object is being measured; an encoder ensures that the measurement spacing is consistent, independent of conveyor speed.

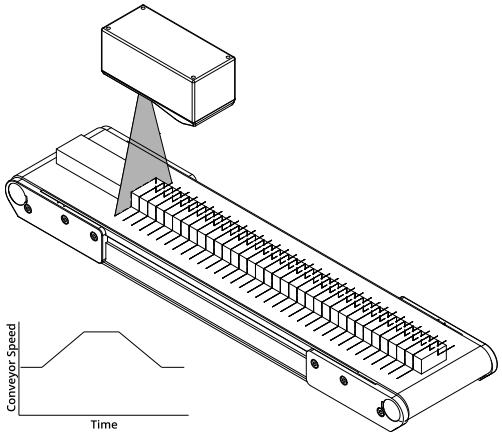


Example: Time + Conveyor

Time triggering can be used instead of encoder triggering to perform profile measurements at a fixed frequency.

Measurement spacing will be non-uniform if the speed of the conveyor varies while the object is being measured.

It is strongly recommended to use an encoder with transport-based systems due to the difficulty in maintaining constant transport velocity.

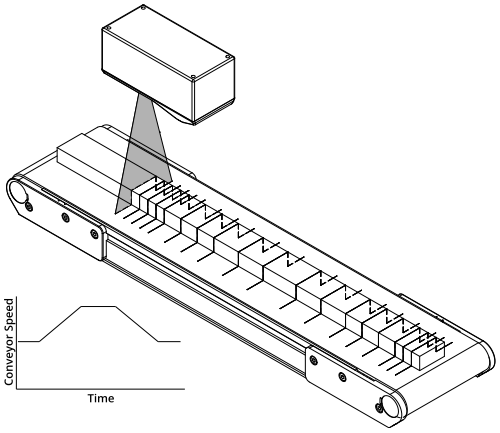


Example: External Input + Conveyor

External input triggering can be used to produce a snapshot for profile measurement.

For example, a photocell can be connected as an external input to generate a trigger pulse when a target object has moved into position.


An external input can also be used to gate the trigger signals when time or encoder triggering is used. For example, a photocell could generate a series of trigger pulses as long as there is a target in position.

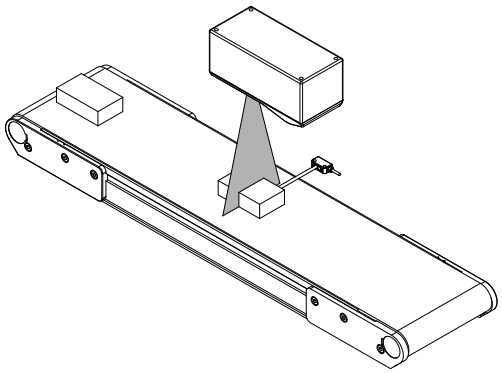

Example: Software Trigger + Robot Arm


Software triggering can be used to produce a snapshot for profile measurement.

A software trigger can be used in systems that use external software to control the activities of system components.

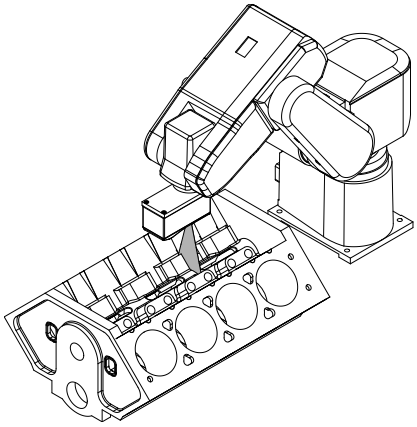

Trigger Settings

The trigger source is selected using the **Trigger** panel in the **Scan** page.

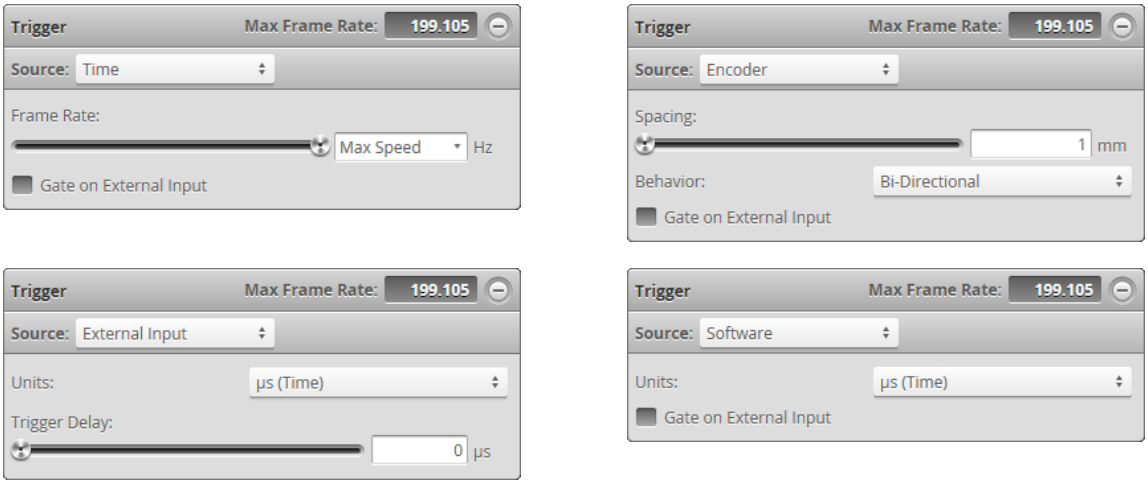

After specifying a trigger source, the **Trigger** panel shows the parameters that can be configured.

Parameter	Trigger Source	Description
Source	All	Selects the trigger source (**Time**, **Encoder**, **External Input**, or **Software**).
Frame Rate	Time	Controls the frame rate. Select **Max Speed** from the drop-down to lock to the maximum frame rate. Fractional values are supported. For example, 0.1 can be entered to run at 1 frame every 10 seconds.
Gate on External Input	Time, Encoder	External input can be used to enable or disable profiling in a sensor. When this option is enabled, the sensor will respond to time or encoder triggers only when the external input is asserted. This setting is not displayed when **Surface Generation** is set to **Fixed Length**, **Variable Length**, or **Rotational** (see on page 107). See See *Digital Inputs* on page 466 for more information on connecting external input to Gocator sensors.
Behavior	Encoder	Specifies how the Gocator sensor is triggered when the target moves. Can be Track Backward, Ignore Backward, or Bi-Directional. See *Triggers* on page 83 for more information on these behaviors.
Spacing	Encoder	Specifies the distance between triggers (mm). Internally the Gocator sensor rounds the spacing to a multiple of the encoder resolution.
Units	External Input, Software	Specifies whether the trigger delay, output delay, and output scheduled command operate in the time or the encoder domain. The unit is implicitly set to microseconds with Time trigger source, and millimeters with Encoder trigger source.

Parameter	Trigger Source	Description
Trigger Delay	External Input	Controls the amount of time or the distance the sensor waits before producing a frame after the external input is activated. This is used to compensate for the positional difference between the source of the external input trigger (e.g., photocells) and the sensor. Trigger delay is only supported in single exposure mode; for details, see *Exposure* on page 92.

Depending on the surface generation settings, some trigger options may not be available.

To configure the trigger source:

1. Go to the **Scan** page.
2. Expand the **Trigger** panel by clicking on the panel header.
3. Select the trigger source from the drop-down.
4. Configure the settings.
   See the trigger parameters above for more information.
5. Save the job in the **Toolbar** by clicking the **Save** button .

Sensor


The following sections describe the settings that are configured in the **Sensor** panel on the **Scan** page.


Active Area


Active area refers to the region within the sensor's maximum field of view that is used for laser profiling.


By default, the active area covers the sensor's entire field of view. By reducing the active area, the sensor can operate at higher speeds.

Active area is specified in sensor coordinates, rather than in system coordinates. As a result, if the sensor is already alignment calibrated, press the **Acquire** button to display uncalibrated data before configuring the active area. See *Coordinate Systems* on page 46 for more information on sensor and system coordinates.





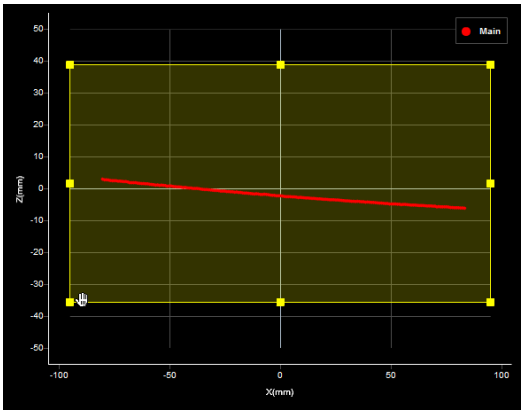

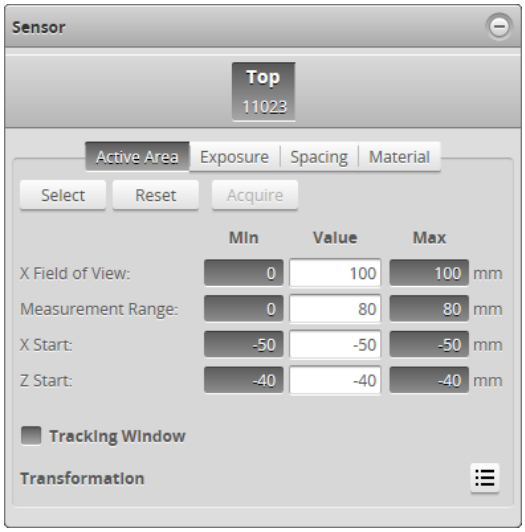

To set the active area:

1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel, depending on the type of measurement whose decision you need to configure.
   If one of these modes is not selected, tools will not be available in the **Measure** panel.
3. Expand the **Sensor** panel by clicking on the panel header or the ⊕ button.
4. Click the button corresponding to the sensor you want to configure.
   The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.
   Active area is specified separately for each sensor.
5. Click on the **Active Area** tab.
6. Click the **Select** button.
7. Click the **Acquire** button to see a scan while setting the active area.
8. Set the active area.
   Enter the active area values in the edit boxes or adjust the active area graphically in the data viewer.
9. Click the **Save** button in the **Sensor** panel.
   Click the **Cancel** button to cancel setting the active area.
10. Save the job in the **Toolbar** by clicking the **Save** button.


🗋	Laser profiling devices are usually more accurate at the near end of their measurement range. If your application requires a measurement range that is small compared to the maximum measurement range of the sensor, mount the sensor so that the active area can be defined at the near end of the measurement range.


Tracking Window

🗋	Gocator 2100 series sensors do not support tracking window.

The Gocator can track a relatively flat object in real-time to achieve very high scan rates. This feature tracks the object height using a small window that moves dynamically to cover a larger measurement range. You can balance the gain in speed and the tracking ability by configuring the size of the tracking area. This feature is typically used in road or web scanning applications where the target is a continuous flat surface.

A laser line remains tracked as long as the percentage of detected laser points exceeds the user-defined search threshold. When the sensor loses track of the laser line, the sensor will search for the laser line using the full active area.

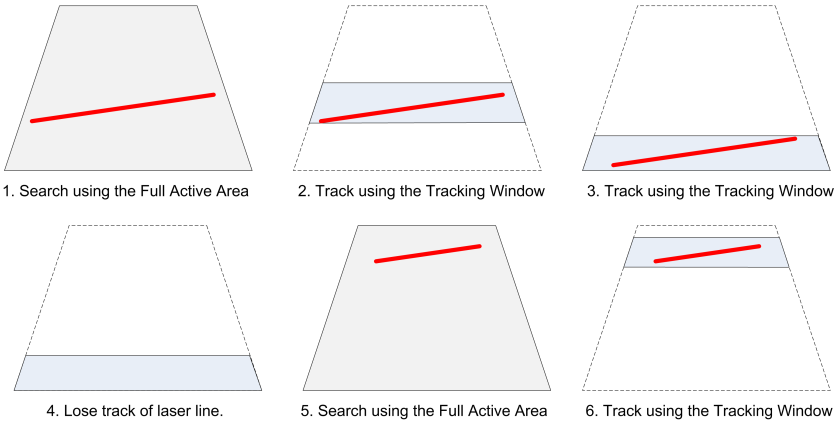

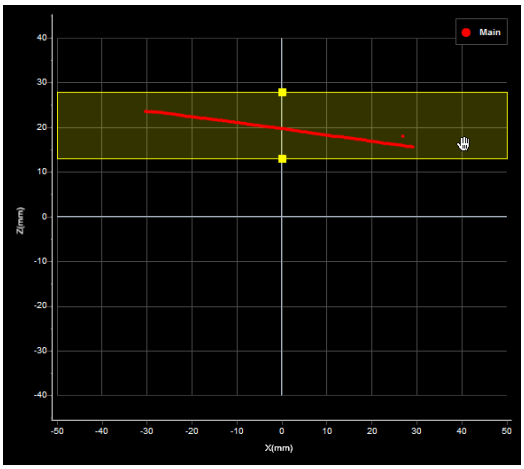



To enable the tracking window:

1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, you will not be able to set the tracking window.
3. Expand the **Sensor** panel by clicking on the panel header.
4. Click on the **Active Area** tab.
5. Check the **Tracking Window** box.

The panel below the checkbox expands and shows the settings for the window used to track the object height.

6. Click the tracking window's **Select** button.
7. Resize the tracking window shown in the data viewer.
   Only the height of the window is required. You can move the position of the tracking window to cover a live profile to help adjust the window height.
8. Edit the **Search Threshold** setting.
   The search threshold defines the minimum percentage of the points detected across the profile for the laser to be considered tracked. If tracking is lost, the sensor will search for the laser using the full active area.
9. Click the **Save** button in the **Sensor** panel.
10. Save the job in the **Toolbar** by clicking the **Save** button .

The sensor adjusts the position of the tracking window so that the area is centered around the average height of the entire visible laser profile. You should adjust the lighting and the active area to remove all background objects, such as the conveyor belt surface, ambient lights, etc.

Transformations

The transformation settings are used to control how profiles are converted from sensor coordinates to system coordinates.



Parameter	Description
X Offset	Specifies the shift along the X axis. With Normal orientation, a positive value shifts the profiles to the right. With Reverse orientation, a positive value shifts the profiles to the left.
Z Offset	Specifies the shift along the Z axis. A positive value shifts the profiles toward the sensor.
Angle	Specifies the tilt (rotation in the X-Z plane). A positive value rotates the profile counter-clockwise.

When applying the transformations, Angle is applied before the X and Z offsets.

To configure transformation settings:

1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel, depending on the type of measurement

whose decision you need to configure.
If one of these modes is not selected, tools will not be available in the **Measure** panel.

3. Expand the **Sensor** panel by clicking on the panel header.
4. Click the button corresponding to the sensor you want to configure.
The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.
Transformations can be configured separately for each sensor.
5. Expand the Transformations area by clicking on the expand button .
See the table above for more information.
6. Set the parameter values.
See the table above for more information.
7. Save the job in the **Toolbar** by clicking the **Save** button .
8. Check that the transformation settings are applied correctly after profiling is restarted.

Exposure


Exposure determines the duration of camera and laser on-time. Longer exposures can be helpful to detect laser signals on dark or distant surfaces, but increasing exposure time decreases the maximum speed. Different target surfaces may require different exposures for optimal results. Gocator sensors provide three exposure modes for the flexibility needed to scan different types of target surfaces.

Exposure Mode	Description
Single	Uses a single exposure for all objects. Used when the surface is uniform and is the same for all targets.
Dynamic	Automatically adjusts the exposure after each frame. Used when the target surface varies between scans.
Multiple	Uses multiple exposures to create a single profile. Used when the target surface has a varying reflectance within a single profile (e.g., white and black).

Video mode lets you see how the laser line appears on the camera and identify any stray light or ambient light problems. When exposure is tuned correctly, the laser should be clearly visible along the entire length of the viewer. If it is too dim, increase the exposure value; if it is too bright decrease exposure value.




Under-exposure:
Laser line is not detected.
Increase the exposure value.

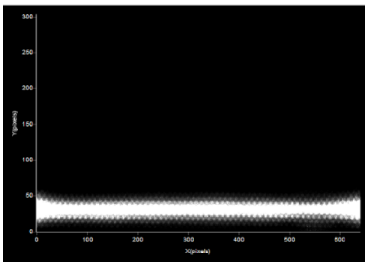


Over-exposure:
Laser line is too bright.
Decrease the exposure value.

When the Gocator is in Multiple exposure mode, select which exposure to view using the drop-down box next to "View" in the data viewer. This drop-down is only visible in Video scan mode when the **Multiple** option is selected in the **Exposure** section in the **Sensor** panel.

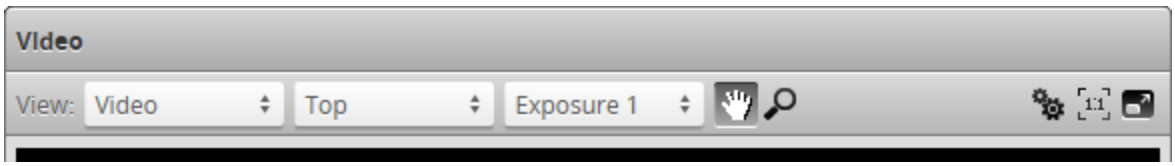

Single Exposure

The sensor uses a fixed exposure in every scan. Single exposure is used when the target surface is uniform and is the same for all parts.

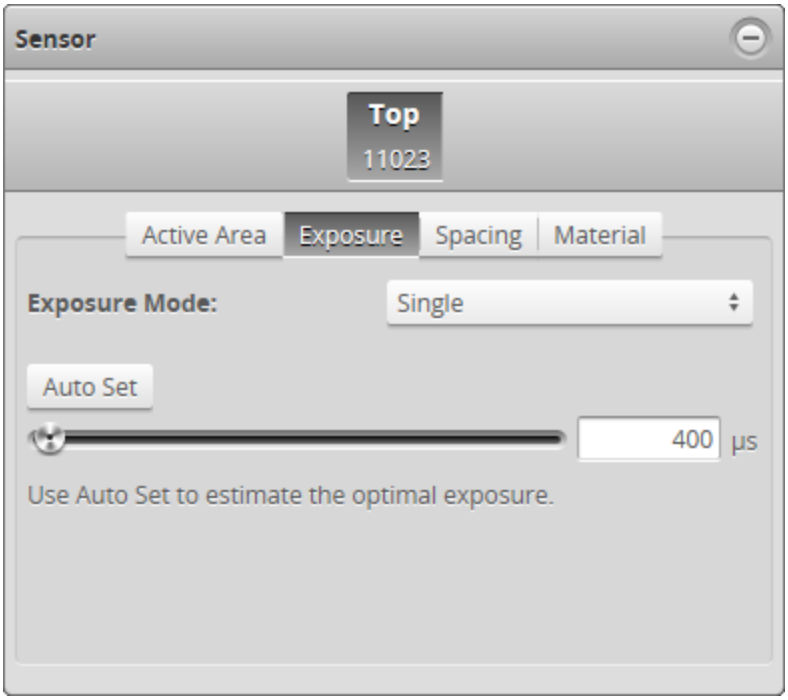


To enable single exposure:

1. Place a representative target in view of the sensor.
   The target surface should be similar to the material that will normally be measured.
2. Go to the **Scan** page.
3. Expand the **Sensor** panel by clicking on the panel header.
4. Click the button corresponding to the sensor you want to configure.
   The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.
   Exposure can be configured separately for each sensor.
5. Click on the **Exposure** tab.
6. Select **Single** from the **Exposure Mode** drop-down.

7. Edit the **Exposure** setting.
   You can automatically tune the exposure by pressing the **Auto Set** button, which causes the sensor to turn on and tune the exposure time.
8. Run the sensor and check that laser profiling is satisfactory.
   If laser profiling is not satisfactory, adjust the exposure values manually. Switch to **Video** mode to use video to help tune the exposure; see *Exposure* on page 92 for details.

Dynamic Exposure

The sensor automatically uses past profile information to adjust the exposure to yield the best profile. This is used when the target surface changes from scan to scan.

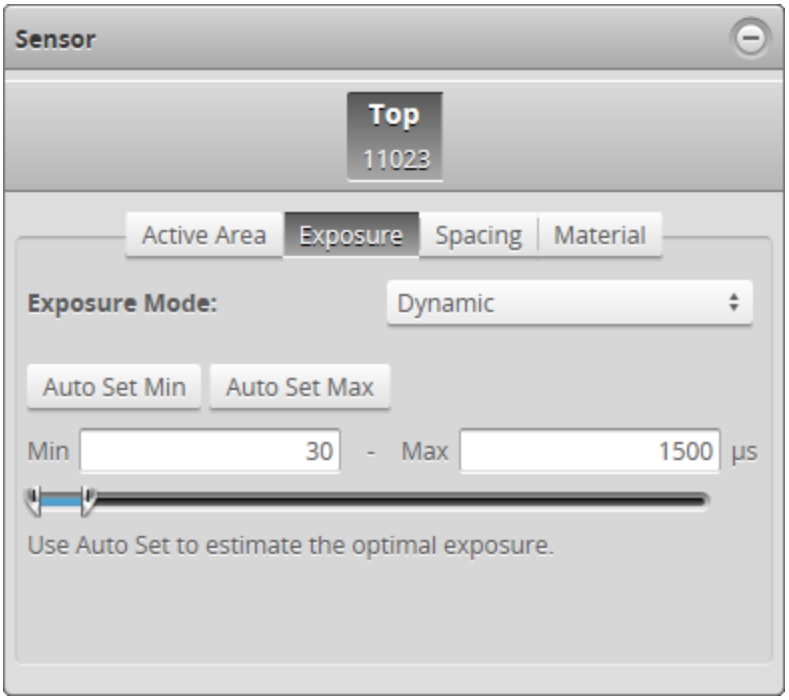

To enable dynamic exposure:

1. Go to the **Scan** page.
2. Expand the **Sensor** panel by clicking on the panel header or the ⊕ button.
3. Click the button corresponding to the sensor you want to configure.
   The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.
   Exposure can be configured separately for each sensor.
4. Click on the **Exposure** tab.
5. Select **Dynamic** from the **Exposure Mode** drop-down.
6. Set the minimum and maximum exposure.
   The auto-set function can be used to automatically set the exposure. First, place the brightest target in the field of view and press the **Auto Set Min** button to set the minimum exposure. Then, place the

darkest target in the field of view and press the **Auto Set Max** button to set the maximum exposure.


7. Run the sensor and check that laser profiling is satisfactory.
   If laser profiling is not satisfactory, adjust the exposure values manually. Switch to **Video** mode to use video to help tune the exposure; see *Exposure* on page 92 for details.

Multiple Exposure

The sensor combines data from multiple exposures to create a single laser profile . Multiple exposures can be used to increase the ability to detect light and dark materials that are in the field of view simultaneously.

Up to five exposures can be defined with each set to a different exposure level. For each exposure, the sensor will perform a complete scan at the current frame rate making the effective frame rate slower. For example, if two exposures are selected, then the speed will be half of the single exposure frame rate. The sensor will perform a complete multi-exposure scan for each external input or encoder trigger.

The resulting profile is a composite created by combing data collected with different exposures. The sensor will choose profile data that is available from the lowest-numbered exposure step. It is recommended to use a larger exposure for higher-numbered steps.

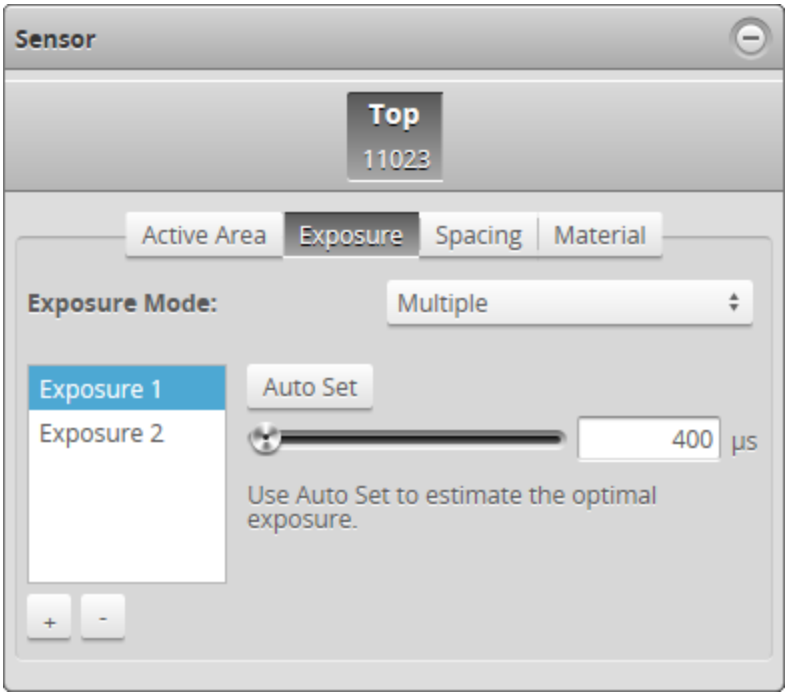

To enable multiple exposure:


1. Go to the **Scan** page.
2. Expand the **Sensor** panel by clicking on the panel header or the ⊕ button.
3. Click the button corresponding to the sensor you want to configure.
   The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.

Exposure can be configured separately for each sensor.

4. Click on the **Exposure** tab.
5. Select **Multiple** from the **Exposure Mode** drop-down.
6. Click the + button to add an exposure step.
   Up to a maximum of five exposure settings can be added.
   To remove an exposure, select it in the exposure list and click the - button.
7. Set the exposure level for each exposure to make the Gocator's camera less or more sensitive, as required.
   If **Acquire Intensity** is enabled, select the exposure step that is used to capture the intensity output.
8. If **Acquire Intensity** is enabled, select the exposure step that is used to capture the intensity output.
9. Run the sensor and check that laser profiling is satisfactory.
   If laser profiling is not satisfactory, adjust the exposure values manually. Switch to **Video** mode to use video to help tune the exposure; see *Exposure* on page 92 for details.

Spacing

The **Spacing** tab lets you configure settings related to spacing (sub-sampling and spacing interval).

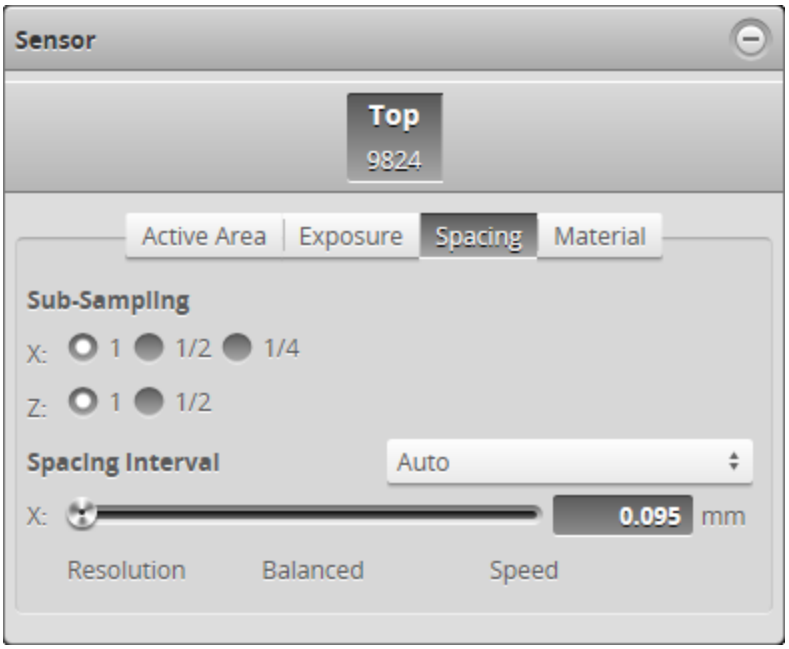

Sub-Sampling

Sub-sampling reduces the number of camera columns or rows that are used for laser profiling, reducing the resolution. Reducing the resolution increases speed or reduces CPU usage while maintaining the sensor's field of view. Sub-sampling can be set independently for the X axis and Z axis.

The **X** sub-sampling setting is used to decrease the profile's X resolution to decrease sensor CPU usage. The **X** setting works by reducing the number of image columns used for laser profiling.

> The **1/4** sub-sampling setting is not available on Gocator 2100 series sensors.

The **Z** sub-sampling setting is used to decrease the profile's Z resolution to increase speed. The **Z** setting works by reducing the number of image rows used for laser profiling.

Sub-sampling values are expressed as fractions in the Web interface. For example, an X sub-sampling value of 1/2 indicates that every second camera column will be used for laser profiling.

> The **CPU Load** bar at the top of the interface displays how much the CPU is being used.

> Both the X and the Z sub-sampling settings must be decreased to increase speed.

To configure X or Z sub-sampling:

1. Go to the **Scan** page.
2. Expand the **Sensor** panel by clicking on the panel header or the ⊕ button.
3. Click the button corresponding to the sensor you want to configure.
   The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.
   X and Z sub-sampling can be configured separately for each sensor.
4. Click on the **Spacing** tab.
5. Select an X or Z sub-sampling value.
6. Save the job in the **Toolbar** by clicking the **Save** button.
7. Check that laser profiling is satisfactory.

Spacing Interval

Spacing interval is the spacing between data points in resampled data. (In Profile mode, resampled data is only produced if the **Uniform Spacing** option in the **Scan Mode** panel is checked.) A larger interval creates profiles with lower X resolution, reduces CPU usage, and potentially increases the maximum frame rate. A larger interval also reduces the data output rate. For more information on resampled data, see *Uniform Spacing (Data Resampling)* on page 50.

> The **Uniform Spacing** option must be checked in the **Scan Mode** panel for the **Spacing Interval** option to be displayed.

You can set the spacing interval either to one of three presets or set a custom value.

To configure the spacing interval:

1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, you will not be able to configure the spacing interval.
3. Expand the **Sensor** panel by clicking on the panel header or the ⊕ button.
4. Click the button corresponding to the sensor you want to configure.
   The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.
   Spacing is specified separately for each sensor.

5. Click on the **Spacing** tab.
6. Do one of the following:
   - Choose **Auto** and move the slider to one of the following values:

     Speed: Uses the lowest X resolution within the active area as the spacing interval. This setting minimizes CPU usage and data output rate, but the profile has the lowest X resolution (i.e., least detail).

     Balanced: Uses the X resolution at the middle of the active area as the spacing interval. This setting balances CPU load, data output rate, and X resolution.


     Resolution: Uses the highest X resolution within the active area as the spacing interval. This setting maximizes resolution but has higher CPU load and has the highest data output rate (i.e., greatest detail).

   - Choose **Custom** and move the slider to a precise value.
7. Save the job in the **Toolbar** by clicking the **Save** button .

Material

Profile data acquisition can be configured to suit different types of target materials. This helps maximize the number of useful profile points produced. For many targets, changing the setting is not necessary, but it can make a great difference with others.

Preset material types can be selected in the **Materials** setting.

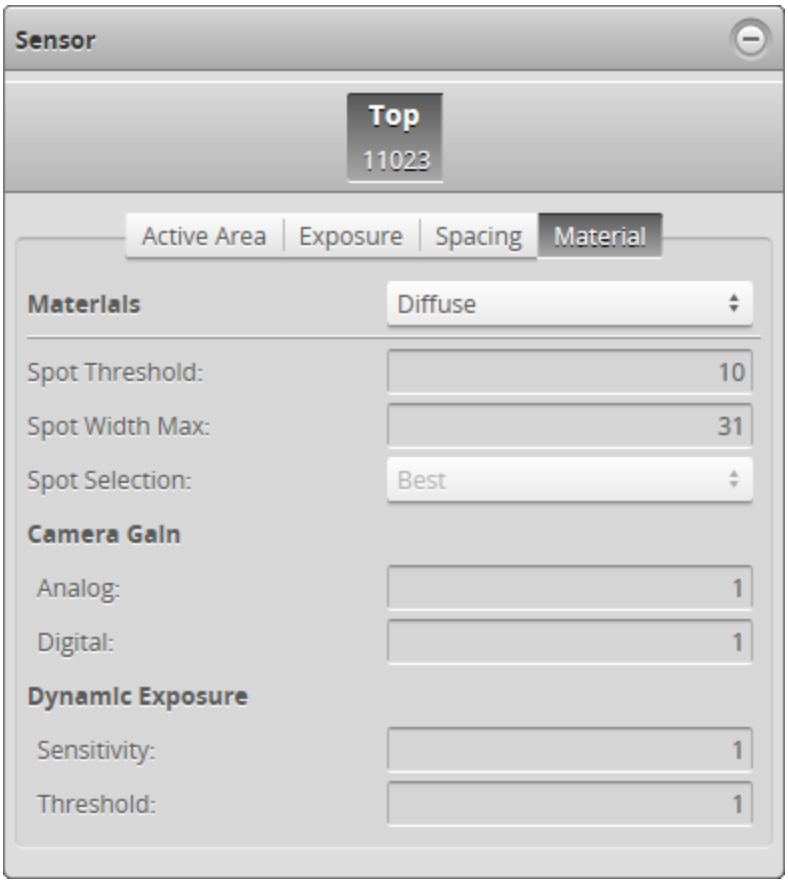

When **Materials** is set to **Custom**, the following settings can be configured:

Setting	Description
Spot Threshold	The minimum increase in intensity level between neighbouring pixels for a pixel to be considered the start of a potential spot. This setting is important for filtering false profile spots generated by sunlight reflection.
Spot Width Max	The maximum number of pixels a spot is allowed to span. This setting can be used to filter out data caused by background light if the unwanted light is wider than the laser and does not merge into the laser itself. A lower **Spot Width Max** setting reduces the chance of false detection, but limits the ability to detect features/surfaces that elongate the spot.
Spot Selection	Determines the spot selection method. **Best** selects the strongest spot in a given column on the imager. **Top** selects the topmost spot or the one farthest to the left on the imager, and **Bottom** selects the bottommost spot or the one farthest to the right on the imager. These options can be useful in applications where there are reflections, flying sparks or smoke that are always on one side of the laser. **None** performs no spot filtering. If multiple spots are detected in an imager column, they are left as is. This option is only available if **Uniform Spacing** is disabled in the **Scan Mode** panel on the **Scan** page; for more information on uniform spacing, see *Uniform Spacing (Data Resampling)* on page 50.
Analog	**Analog** camera gain can be used when the application is severely exposure limited, yet dynamic range is not a critical factor.
Digital	**Digital** camera gain can be used when the application is severely exposure limited, yet dynamic range is not a critical factor.
Sensitivity	Controls the exposure that dynamic exposure converges to. The lower the value, the lower the exposure Gocator will settle on. The trade-off is between the number of exposure spots and the possibility of over-exposing.
Threshold	The minimum number of spots for dynamic exposure to consider the spot valid. If the number of spots is below this threshold, the algorithm will walk over the allowed exposure range slowly to find the correct exposure.

To configure material:

1. Go to the **Scan** page.
2. Expand the **Sensor** panel by clicking on the panel header or the ⊕ button.
3. Click the button corresponding to the sensor you want to configure.
   The button is labeled **Top**, **Bottom**, **Top-Left**, or **Top-Right**, depending on the system.
   Materials can be configured separately for each sensor.
4. Click on the **Materials** tab.

5. Choose a material in the **Materials** drop-down or choose **Custom** to manually configure settings. See the table above for the customizable settings.
6. Save the job in the **Toolbar** by clicking the **Save** button .
7. Check that laser profiling is satisfactory.
   After adjusting the setting, confirm that laser profiling is satisfactory.

Various settings can affect how the **Material** settings behave. You can use Video mode to examine how the settings interact. See *Spots and Dropouts* on page 118 for more information.

Alignment

Gocator sensors are pre-calibrated and ready to deliver profiles in engineering units (mm) out of the box. However, alignment procedures are required to compensate for sensor mounting inaccuracies, to align multiple sensors into a common coordinate system, and to determine the resolution (with encoder) and speed of the transport system. Alignment is performed using the **Alignment** panel on the **Scan** page.

Once alignment has been completed, the derived transformation values will be displayed under **Transformations** in the **Sensor** panel; see *Transformations* on page 91 for details.

Alignment States

A Gocator can be in one of three alignment states: None, Manual, or Auto.

Alignment State

State	Explanation
None	Sensor is not aligned. Profiles are reported in default sensor coordinates.
Manual	Transformations (see on page 91) or encoder resolution (see on page 86) have been manually edited.
Auto	Sensor is aligned using the alignment procedure (see on the next page).

An indicator on the **Alignment** panel will display ALIGNED or UNALIGNED, depending on the Gocator's state.

Alignment Types

Gocator sensors support two types of alignment, which are related to whether the target is stationary or moving.

Type	Description
Stationary	**Stationary** is used when the sensor mounting is constant over time and between scans, e.g., when the sensor is mounted in a permanent position over a conveyor belt.
Moving	**Moving** is used when the sensor's position relative to the object scanned is always changing, e.g., when the sensor is mounted on a robot arm moving to different scanning locations.

Alignment: With and Without Encoder Calibration

For systems that use an encoder, encoder calibration can be performed while aligning sensors. The table below summarizes the differences between performing alignment with and without encoder calibration calibration.


	With encoder calibration	Without encoder calibration
Target Type	Calibration disk or calibration bar	Flat surface or calibration bar
Target/Sensor Motion	Linear motion	Stationary
Calibrates Tilt	Yes	Yes
Calibrates Z axis Offset	Yes	Yes
Calibrates X axis Offset	Yes	Yes (Calibration bar required)
Calibrates Encoder	Yes	No
Calibrates Travel Speed	Yes	No

See *Coordinate Systems* on page 46 for definitions of coordinate axes. See *Calibration Targets* on page 24 for descriptions of calibration disks and bars.

See *Aligning Sensors* below for the procedure to perform alignment. After alignment, the coordinate system for laser profiles will change from sensor coordinates to system coordinates.

Aligning Sensors

Alignment can be used to compensate for mounting inaccuracies by aligning sensor data to a common reference surface (often a conveyor belt).

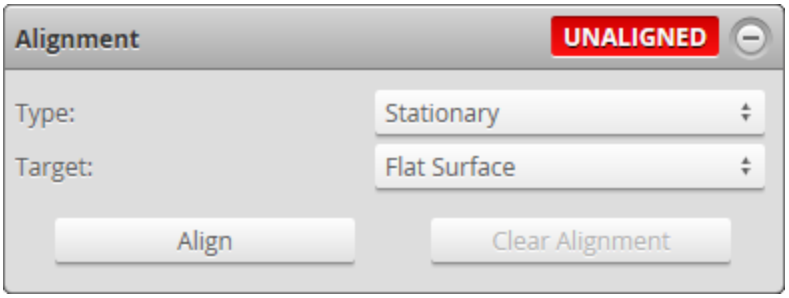


To prepare for alignment:

1. Choose an alignment reference in the **Manage** page if you have not already done so.
   See *Alignment Reference* on page 71 for more information.
2. Go to the **Scan** page.
3. Choose Profile or Surface mode in the **Scan Mode** panel, depending on the type of measurement whose decision you need to configure.
   If one of these modes is not selected, tools will not be available in the **Measure** panel.
4. Expand the **Alignment** panel by clicking on the panel header or the ⊕ button.
5. Ensure that all sensors have a clear view of the target surface.
   Remove any irregular objects from the sensor's field of view that might interfere with alignment. If using a bar for a dual-sensor system, ensure that the lasers illuminate a reference hole on the bar.

To perform alignment for stationary targets:

1. In the **Alignment** panel, select **Stationary** as the **Type**.
2. Clear the previous alignment if present.
   Press the **Clear Alignment** button to remove an existing alignment.s
3. Select an alignment **Target**.
   - Select **Flat Surface** to use the conveyor surface (or other flat surface) as the alignment reference
   - Select **Bar** to use a custom calibration bar. If using a calibration bar, specify the bar dimensions and reference hole layout. See *Calibration Targets* on page 24 for details.

     Configure the characteristics of the target.

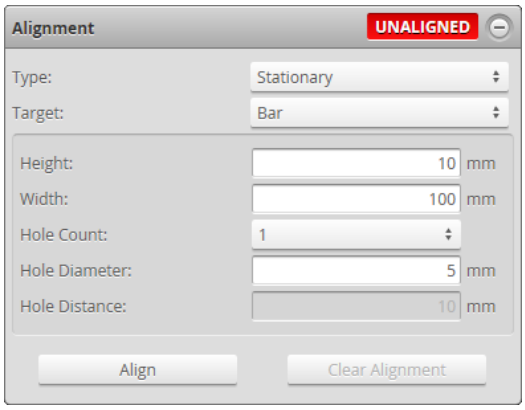

4. Place the target under the sensor
5. Click the **Align** button.
   The sensors will start, and the alignment process will take place. Alignment is performed simultaneously for all sensors. If the sensors do not align, check and adjust the exposure settings (page 92).

   > Alignment uses the exposure defined for single exposure mode, regardless of the current exposure mode

6. Use **Profile** mode to inspect alignment results.
   Laser profiles from all sensors should now be aligned to the alignment target surface. The base of the alignment target (or target surface) provides the origin for the system Z axis.


To perform alignment for moving targets:

1. Do one of the following if you have not already done so.
   - If the system uses an encoder, configure encoder resolution. See *Encoder Resolution* on page 71 for more information.
   - If the system does not use an encoder, configure travel speed. See *Travel Speed* on page 72 for more information.
2. In the **Alignment** panel, select **Moving** as the **Type**.

3. Clear the previous alignment if present.
   Press the **Clear Alignment** button to remove an existing alignment.

4. Select an alignment **Target**.
   - Select one of the disk **Disk** options to use a disk as the alignment reference.
   - Select **Bar** to use a custom calibration bar. If using a calibration bar, specify the bar dimensions and reference hole layout. See *Calibration Targets* on page 24 for details.

     Configure the characteristics of the target.

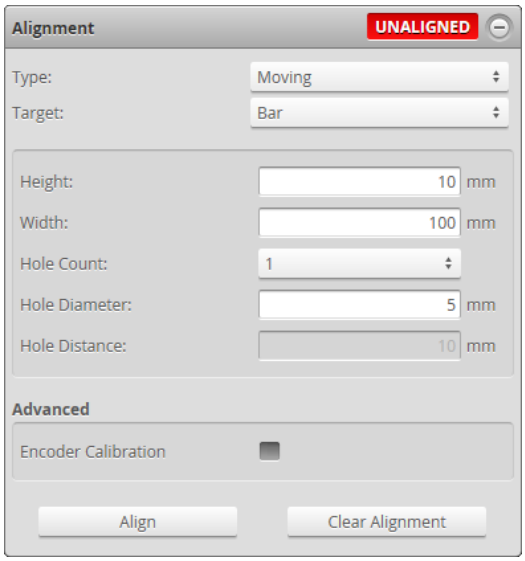

5. Place the target under the sensor

6. If the system uses an encoder and you want to calibrate it, check the **Encoder Calibration** checkbox.

7. Click the **Align** button.
   The sensors will start and then wait for the calibration target to pass through the laser plane.
   Alignment is performed simultaneously for all sensors. If the sensors do not align, check and adjust the exposure settings (page 92).

   > Alignment uses the exposure defined for single exposure mode, regardless of the current exposure mode


8. Engage the transport system.
   When the calibration target has passed completely through the laser plane, the calibration process will complete automatically. To properly calibrate the travel speed, the transport system must be running at the production operating speed before the target passes through the laser plane.

9. Use **Profile** mode to inspect alignment results.
   Laser profiles from all sensors should now be aligned to the alignment target surface. The base of the alignment target (or target surface) provides the origin for the system Z axis.

> When using an alignment bar, there can be at most one hole in each sensor's field of view.

Clearing Alignment

Alignment can be cleared to revert the sensor to sensor coordinates.

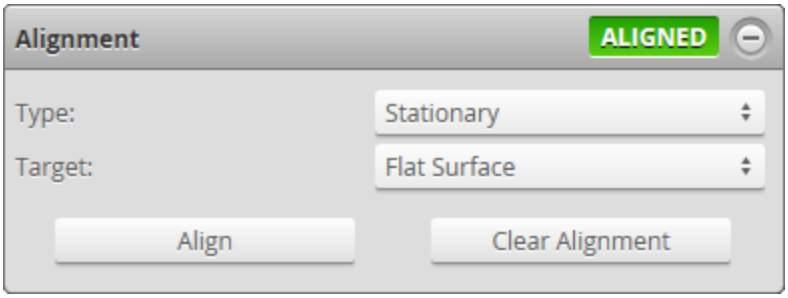

To clear alignment:

1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel, depending on the type of measurement whose decision you need to configure.
   If one of these modes is not selected, tools will not be available in the **Measure** panel.
3. Expand the **Alignment** panel by clicking on the panel header or the ⊕ button.
4. Click the **Clear Alignment** button.
   The alignment will be erased and sensors will revert to using sensor coordinates.

Filters

Filters are used to post-process data along the X or Y axis to remove noise or clean it up before it is output or is used by measurement tools.

The following types of filters are supported:

Filter	Description
Gap Filling	Fills in missing data caused by occlusions using information from the nearest neighbors. Gap filling also fills gaps where no data is detected, which can be due to the surface reflectivity, for example dark or specular surface areas, or to actual gaps in the surface.
Median	Substitutes the value of a data point with the median within a specified window around the data point.
Smoothing	Applies moving window averaging to reduce random noise.
Decimation	Reduces the number of data points.

Filters are applied in the order displayed in the table above. The filters are configured in the **Filters** panel on the **Scan** page.


Gap Filling

Gap filling works by filling in missing data points using either the lowest values from the nearest neighbors or linear interpolation between neighboring values (depending on the Z difference between neighboring values), in a specified window. The sensor can fill gaps along both the X axis and the Y axis. X

gap filling works by filling in the gaps within the same profile. Y gap filling works by filling in gaps in the direction of travel at each X location.

If both X and Y gap filling are enabled, missing data is filled along the X and Y axes at the same time, using the available neighboring data.

> In Profile mode, Gap Filling is limited to the X axis. (The Y setting is not available.)

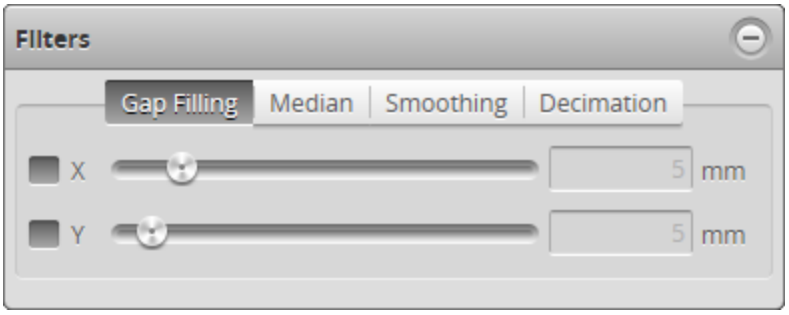


To configure X or Y gap filling:

1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, you will not be able to configure gap filling.
3. Expand the **Filters** panel by clicking on the panel header or the button.
4. Click on the **Gap Filling** tab.
5. Enable the **X** or **Y** setting and select the maximum width value.
   The value represents the maximum gap width that the Gocator will fill. Gaps wider than the maximum width will not be filled.
6. Save the job in the **Toolbar** by clicking the **Save** button .
7. Check that the laser profiling is satisfactory.

Median

The Median filter substitutes the value of a data point with the median calculated within a specified window around the data point.

> Missing data points will not be filled with the median value calculated from data points in the neighbourhood.

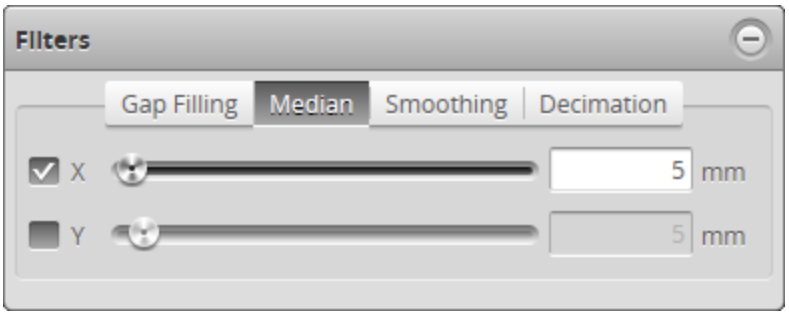

To configure X or Y median:


1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, you will not be able to configure the median filter.
3. Expand the **Filters** panel by clicking on the panel header or the ⊕ button.
4. Click on the **Median** tab.
5. Enable the **X** or **Y** setting and select the maximum width value.
6. Save the job in the **Toolbar** by clicking the **Save** button.
7. Check that the laser profiling is satisfactory.

Smoothing

Smoothing works by substituting a data point value with the average value of that data point and its nearest neighbors within a specified window. Smoothing can be applied along the X axis or the Y axis. X smoothing works by calculating a moving average across samples within the same profile. Y smoothing works by calculating a moving average in the direction of travel at each X location.

If both X and Y smoothing are enabled, the data is smoothed along X axis first, then along the Y axis.

🗋	Missing data points will not be filled with the mean value calculated from data points in the neighbourhood.

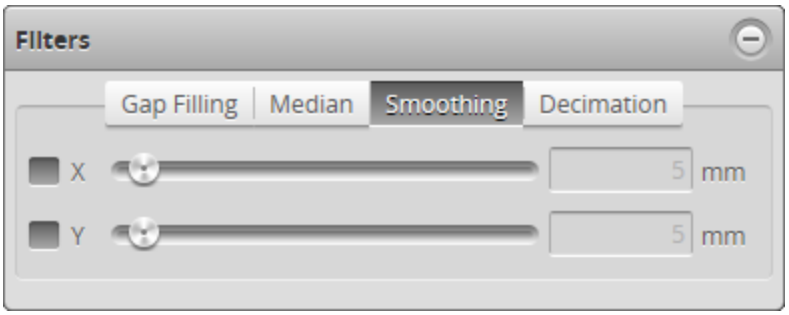


To configure X or Y smoothing:

1. Go to the **Scan** page.

2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, you will not be able to configure smoothing.
3. Expand the **Filters** panel by clicking on the panel header or the ⊕ button.
4. Click on the **Smoothing** tab.
5. Enable the **X** or **Y** setting and select the averaging window value.
6. Save the job in the **Toolbar** by clicking the **Save** button.
7. Check that the laser profiling is satisfactory.

Decimation

Decimation reduces the number of data points along the X or Y axis by choosing data points at the end of a specified window around the data point. For example, by setting X to .2, only points every .2 millimeters will be used.

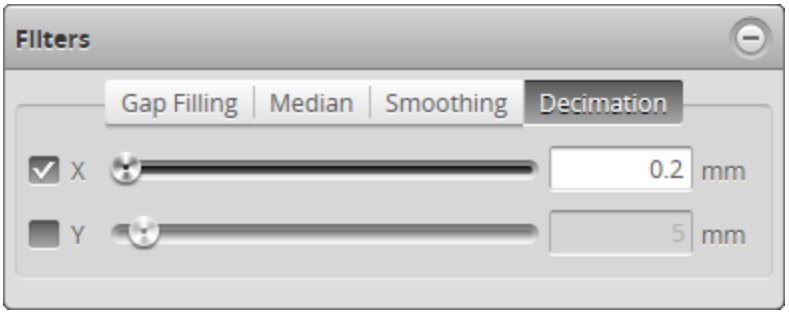


To configure X or Y decimation:


1. Go to the **Scan** page.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, you will not be able to configure the decimation filter.
3. Expand the **Filters** panel by clicking on the panel header or the ⊕ button.
4. Click on the **Decimation** tab.
5. Enable the **X** or **Y** setting and select the decimation window value.
6. Save the job in the **Toolbar** by clicking the **Save** button.
7. Check that the laser profiling is satisfactory.


Surface Generation


The sensor can generate a surface by combining a series of profiles gathered along the direction of travel.

The sensor uses different methods to generate a surface, depending on the needs of the application. Surface generation is configured in the **Surface Generation** panel on the **Scan** page.

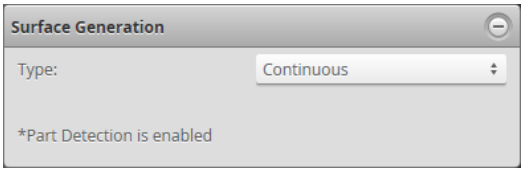

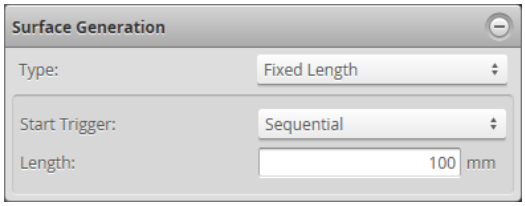

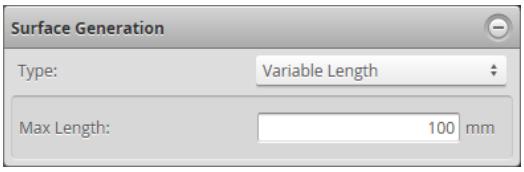


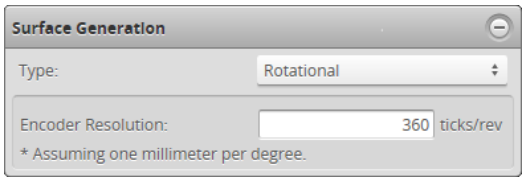


The following types correspond to the **Type** setting in the panel.

> When **Type** is set to **Continuous**, part detection is automatically enabled. When Type is set to anything else, part detection can be enabled and disabled in the **Part Detection** panel. See *Part Detection* on page 111 for descriptions of the settings that control detection logic.

Continuous: The sensor continuously generates surfaces of parts that are detected under the sensor.

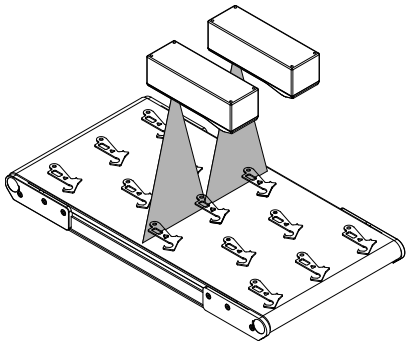

Fixed Length: The sensor generates surfaces of a fixed length (in mm) using the value in the **Length** setting.

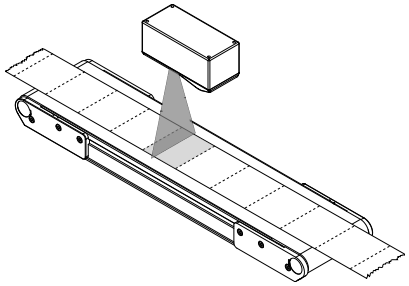

For correct length measurement, you should ensure that motion is calibrated (that is, encoder resolution for encoder triggers or travel speed time triggers).

The **Type** setting provides two types of start triggers:


- **Sequential**: Continuously generates back-to-back fixed length surfaces.
- **External Input**: A pulse on the digital input triggers the

generation of a single surface of fixed length.

For more information on connecting external input to a Gocator sensor, see on page 466.

You can optionally enable part detection to process the **profile**surface after it has been generated, but the generation itself does not depend on the detection logic. To do this, check **Enabled** in the **Part Detection** panel.


Variable Length: The sensor generates surfaces of variable length. Profiles collected while the external digital input is held high are combined to form a surface. If the value of the **Max Length** setting is reached while external input is still high, the next surface starts immediately with the next profile. For correct length measurement, you should ensure that motion is calibrated (i.e., encoder resolution for encoder triggers or travel speed for time triggers).

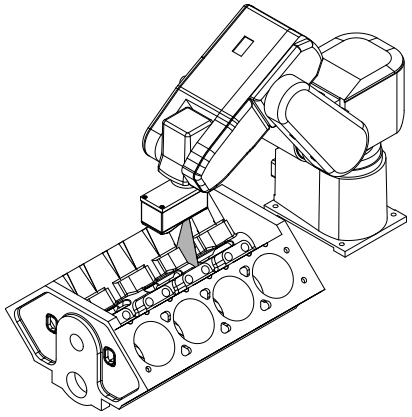

For more information on connecting external input to a Gocator sensor, see on page 466.

You can optionally enable part detection to process the **profile**surface after it has been generated, but the generation itself does not depend on the detection logic. To do this, check **Enabled** in the **Part Detection** panel.

Rotational: The sensor reorders profiles within a surface to be aligned with the encoder's index pulse. That is, regardless of the radial position the sensor is started at, the generated surface always starts at the position of the index pulse. If the index pulse is not detected and the rotation circumference is met, the surface is dropped and the Encoder Index Drop indicator will be incremented.

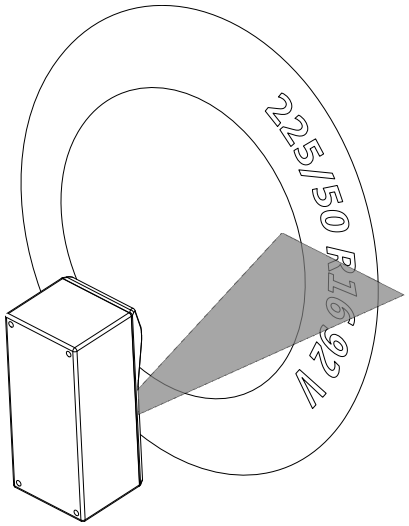

☐	To scan exactly one revolution of a circular target without knowing the circumference, manually set the encoder resolution (page 71) to 1, the encoder trigger spacing (page 83) to (number of encoder ticks per revolution) / (number of desired profiles per revolution), and **Encoder Resolution** in the **Surface Generation** panel to the number of encoder ticks per revolution.

You can optionally enable part detection to process the surface after it has been generated, but the generation itself does not depend on the detection logic. To do this, check **Enabled** in the **Part Detection** panel.

To configure surface generation:

1. Go to the **Scan** page and choose **Surface** in the **Scan Mode** panel.
   If this mode is not selected, you will not be able to configure surface generation.

2. Expand the **Surface Generation** panel by clicking on the panel header or the ⊕ button.
3. Choose an option from the **Type** drop-down and any additional settings.
   See the types and their settings described above.


Part Detection


In Surface mode, the Gocator sensor can analyze the 3D point cloud created from profiles to identify discrete objects. Surface measurements can then be performed on each discrete object. Part detection is configured using the **Part Detection** panel on the **Scan** page.

Part detection must be manually enabled when **Type** is set to **Fixed Length**, **Variable Length**, or **Rotational** in the **Surface Generation** panel. When **Type** is set to **Continuous**, part detection is always enabled.

Part detection can be performed when **Source** in the **Trigger** panel is set to **Time** or **Encoder**. To use the **Time** trigger source, the travel speed must be calibrated. To use the **Encoder** trigger source, the encoder resolution must be calibrated. See *Aligning Sensors* on page 101 for more information.

Multiple parts can pass through the laser at the same time and will be individually tracked. Parts can be separated along the laser line (X axis), in the direction of travel (Y axis), or by gated external input.

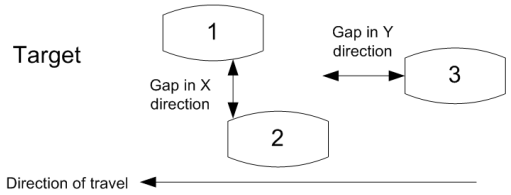

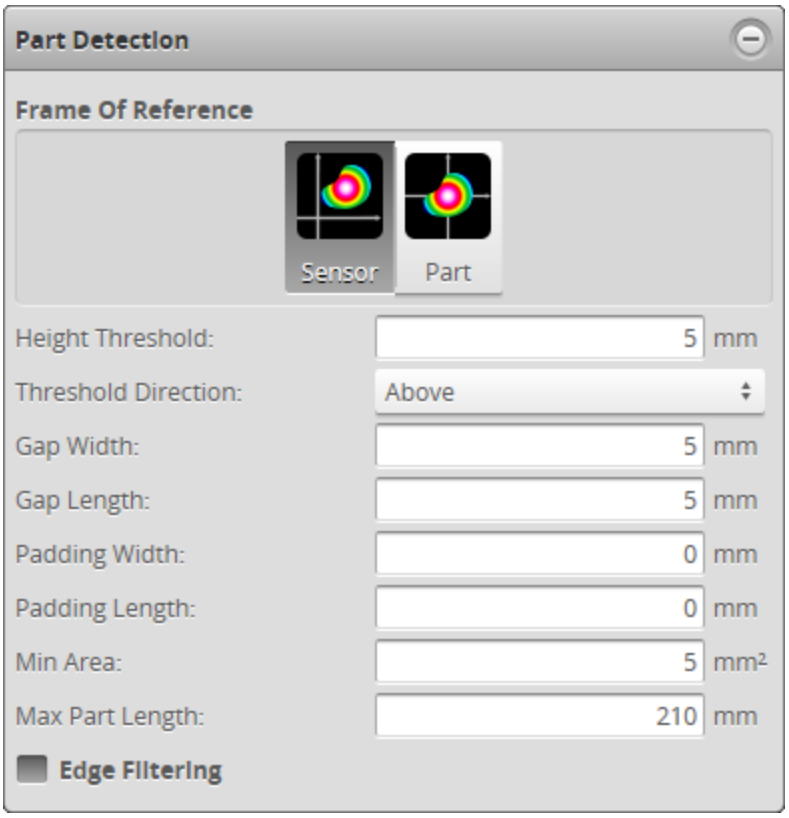

The following settings can be tuned to improve the accuracy and reliability of part detection.

Setting	Description
Height Threshold	Determines the profile height threshold for part detection. The setting for **Threshold Direction** determines if parts should be detected above or below the threshold. Above is typically used to prevent the belt surface from being detected as a part when scanning objects on a conveyor. In an Opposite layout, the threshold is applied to the difference between the top and the bottom profile. A target thinner than the threshold value is ignored, including places where only one of either top or bottom is detected. To separate parts by gated external input, set the **Height Threshold** to the active area Z offset (i.e., minimum Z position of the current active area), set **Source** to **Time** or **Encoder** and check the **Gate Using External Input** checkbox in the **Trigger** panel (page 83).
Threshold Direction	Determines if parts should be detected above or below the height threshold.
Gap Width	Determines the minimum separation between objects on the X axis. If parts are closer than the gap interval, they will be merged into a single part.
Gap Length	Determines the minimum separation between objects on the Y axis. If parts are closer than the gap interval, they will be merged into a single part.
Padding Width	Determines the amount of extra data on the X axis from the surface surrounding the detected part that will be included. This is mostly useful when processing part data with third-party software such as HexSight, Halcon, etc.

Setting	Description
Padding Length	Determines the amount of extra data on the Y axis from the surface surrounding the detected part that will be included. This is mostly useful when processing part data with third-party software such as HexSight, Halcon, etc.
Min Area	Determines the minimum area for a detected part. Set this value to a reasonable minimum in order to filter out small objects or noise.
Max Part Length	Determines the maximum length of the part object. When the object exceeds the maximum length, it is automatically separated into two parts. This is useful to break a long object into multiple sections and perform measurements on each section.
Frame of Reference	Determines the coordinate reference for surface measurements. **Sensor** When **Frame of Reference** is set to **Sensor**, the sensor's frame of reference is used. The way the sensor's frame of reference is defined changes depending on the surface generation **Type** setting (see on page 107 for more information): • When parts are segmented from a continuous surface (the surface generation **Type** setting is set to **Continuous**), measurement values are relative to a Y origin at the center of the part (the same as for Part frame of reference; see below). • When parts are segmented from other types of surfaces (the surface generation **Type** setting is set to **Fixed Length**, **Variable Length**, or **Rotational**), measurement values are relative to a Y origin at the center of the surface from which the part is segmented. The Surface Bounding Box GlobalX and GlobalY measurements (see *Bounding Box* on page 187) are exceptions: regardless of the **Frame of Reference** setting, these measurements produce the Sensor frame of reference values of the Part frame of reference origin (which is the bounding box center), except for GlobalY when parts are segmented from continuous surfaces. In this case the GlobalY value is the Y value relative to the encoder zero position. These values can be used to locate Part frame of reference measurements in a world space. **Part** When **Frame of Reference** is set to **Part**, all measurements except Bounding Box X and Y are relative to the center of the bounding box of the part. For Bounding Box X and Y, the measurement values are always relative to the sensor frame of reference (see *Bounding Box* on page 187).
Edge Filtering	See *Edge Filtering* on the next page.

To set up part detection:


1. Go to the **Scan** page and choose **Surface** in the **Scan Mode** panel.
   If this mode is not selected, you will not be able to configure part detection.
2. Expand the **Part Detection** panel by clicking on the panel header or the ⊕ button.

3. If necessary, check the **Enabled** option.
   When **Surface Generation** is set to **Continuous**, part detection is always enabled.


4. Adjust the settings.
   See the part detection parameters above for more information.

Edge Filtering


Part scans sometimes contain noise around the edges of the target. This noise is usually caused by the sensor's light being reflected off almost vertical sides, rounded corners, etc. Edge filtering helps reduce edge noise in order to produce more accurate and repeatable volume and area measurements, as well as to improve positioning of relative measurement regions. Optionally, the **Preserve Interior Feature** setting can be used to limit filtering to the outside edges of the target.

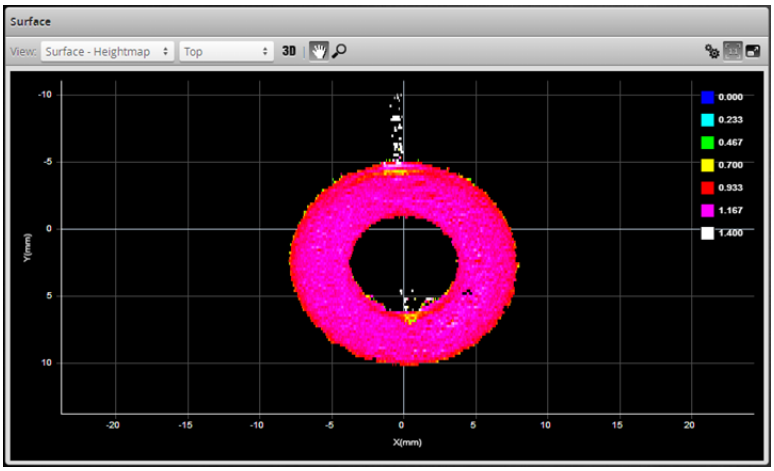


Edge Filtering disabled (scan shows reflection noise)

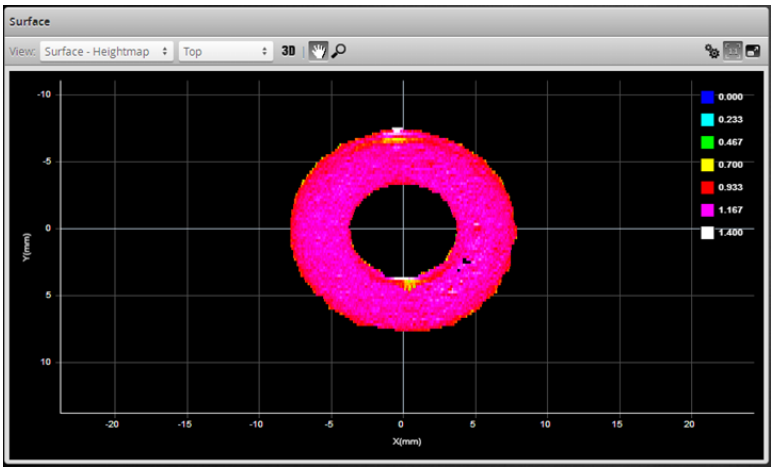

Edge Filtering enabled (reflection noise eliminated or reduced)

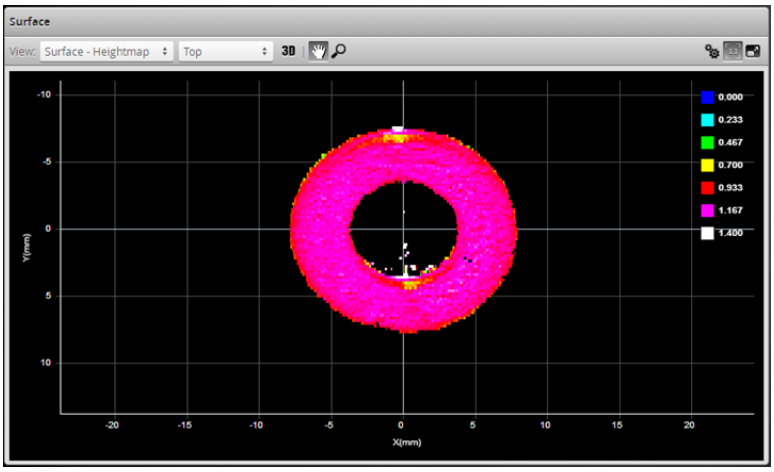

Edge Filtering enabled, Preserve Interior Feature enabled

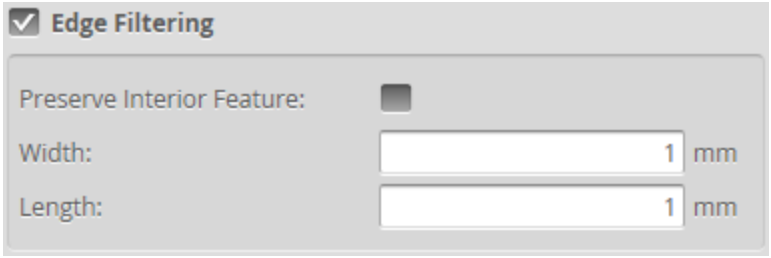

To configure edge filtering:

1. Go to the **Scan** page and choose **Surface** in the **Scan Mode** panel.
   If this mode is not selected, you will not be able to configure part detection.
2. Expand the Part Detection panel by clicking on the panel header or the ⊕ button and enable part detection if necessary.
   Part detection can be enabled and disabled when **Type** in the **Surface Generation** panel is set to **Fixed Length**, **Variable Length**, or **Rotational**. Part detection is automatically enabled when **Type** is set to **Continuous**.
3. Check the **Edge Filtering** checkbox to enable edge filtering.
4. Configure the **Width** and **Length** settings.
   The **Width** and **Length** settings represent the size of the filter on the X axis and the Y axis, respectively.
5. Set the **Preserve Interior Feature** setting if necessary.
   The **Preserve Interior Feature** setting limits filtering to the outside edges of the target.


Data Viewer

The data viewer can display video images, , profiles, sections, surfaces, height maps, and intensity images. It is also used to configure the active area (see on page 88) and measurement tools (see on page 148). The data viewer changes depending on the current operation mode and the panel that has been selected.

Data Viewer Controls

The data viewer is controlled by mouse clicks and by the buttons on the display toolbar. The mouse wheel can also be used for zooming in and out.

Press 'F' when the cursor is in the data viewer to switch to full screen.

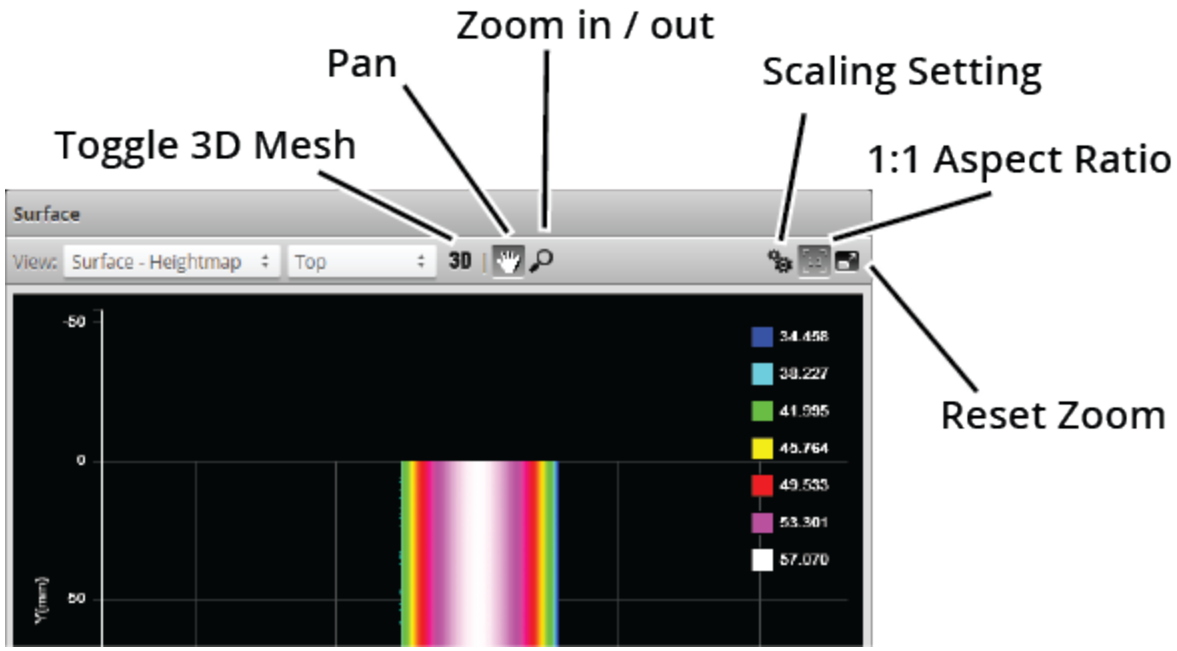

Video Mode


In Video mode, the data viewer displays a camera image. In a dual-sensor system, camera images from the Main or the Buddy sensor can be displayed. In this mode, you can configure the data viewer to display additional information that can be useful in properly setting up the Gocator for scanning.

Exposure Information

In Video mode, you can display exposure-related information.

Exposures

If you have set **Exposure Mode** to **Multiple**, and have set more than one exposure, a drop-down is displayed at the top of the data viewer. This drop-down lists the available exposures. Choosing an exposure changes the view of the data viewer to that exposure. For details on setting exposure in the **Exposure** tab in the **Sensor** panel, see on page 92.

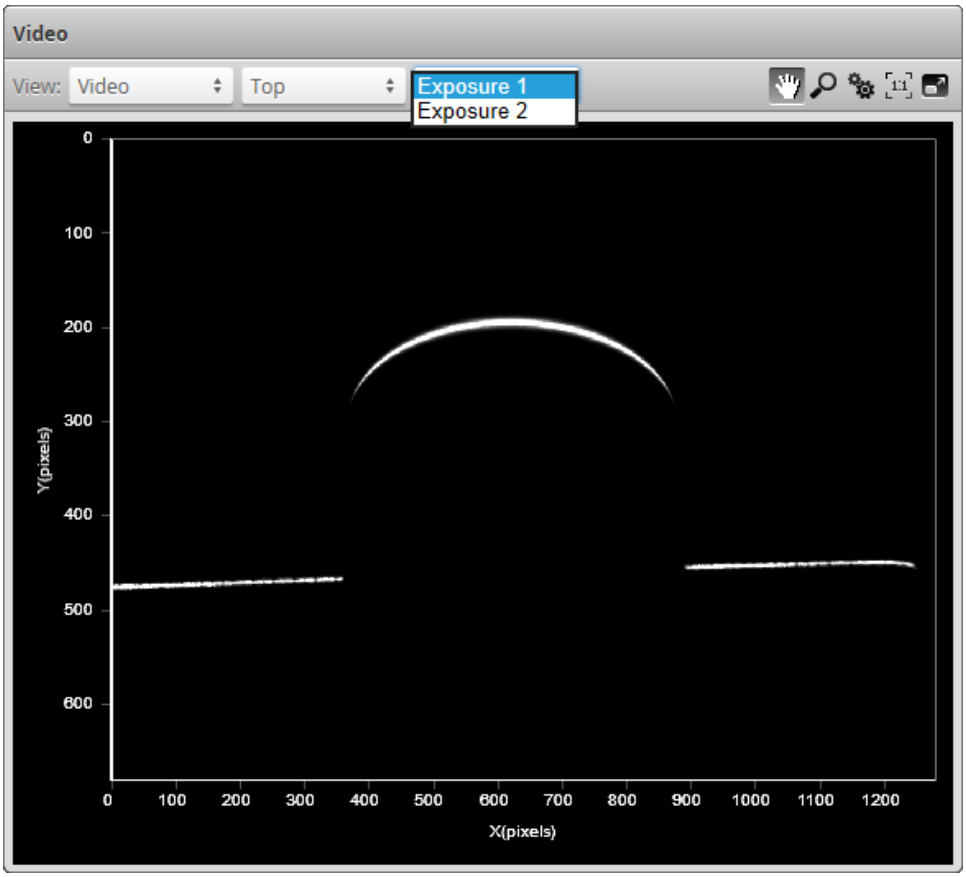


To select the exposure view of the display:

1. Go to the **Scan** page and choose **Video** mode in the **Scan Mode** panel.
2. Select the camera view in the data viewer.
   Use the first drop-down list next to **View** at the top of the data viewer to select **Main** or **Buddy**.
3. Select the exposure.
   Use the second drop-down list next to **View** at the top of the data viewer to select the exposure.

Overexposure and Underexposure

You can display a color exposure overlay on the video image to help set the correct exposure.

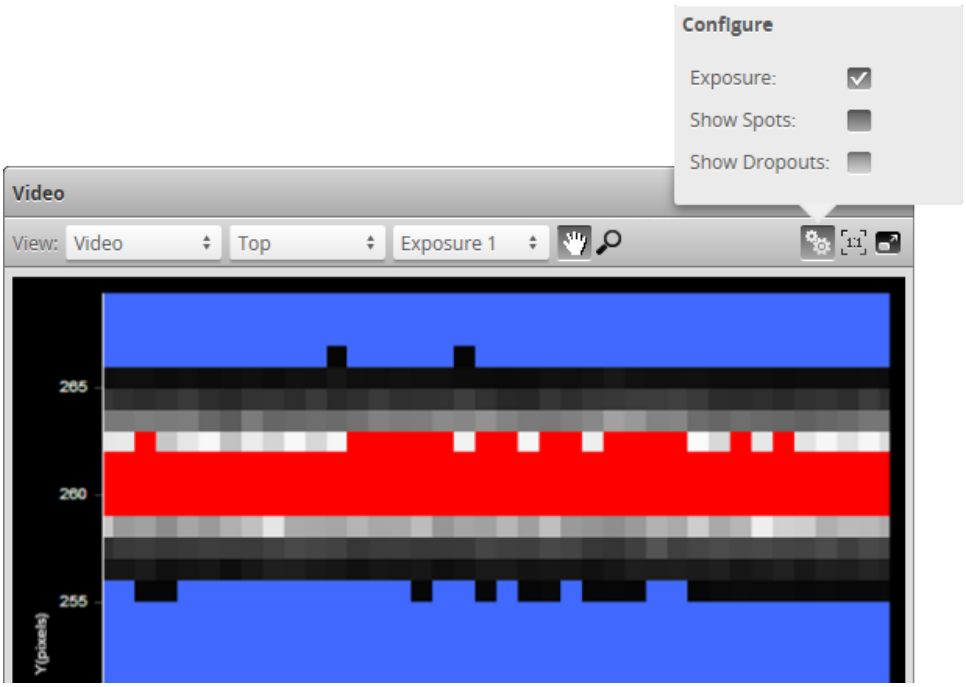

The **Exposure** setting uses the following colors:

- Blue: Indicates background pixels ignored by the sensor.
- Red: Indicates saturated pixels.

Correct tuning of exposure depends on the reflective properties of the target material and on the requirements of the application. Settings should be carefully evaluated for each application, but often a good starting point is to set the exposure so that there are 2 to 3 red pixels in the center of the laser line.


To display an overlay:

1. Go to the **Scan** page and choose **Video** mode in the **Scan Mode** panel.
2. Check **Exposure** at the top of the data viewer.

Spots and Dropouts

Various settings can affect how the **Material** settings behave. In Video mode, you can examine how the **Material** settings are affected. To do this, in Video mode, check the **Show Spots** option at the top of the data viewer to overlay a representation of the spots in the data viewer.

In the image below, the white and gray squares represent the laser line as it appears on the camera sensor. Spots (which represent the center of the laser line on the camera sensor for each column) are displayed as red "x" symbols.Dropouts (where no spot is detected on the camera sensor in a given column) are depicted at the upper edge of the data viewer as yellow dots.

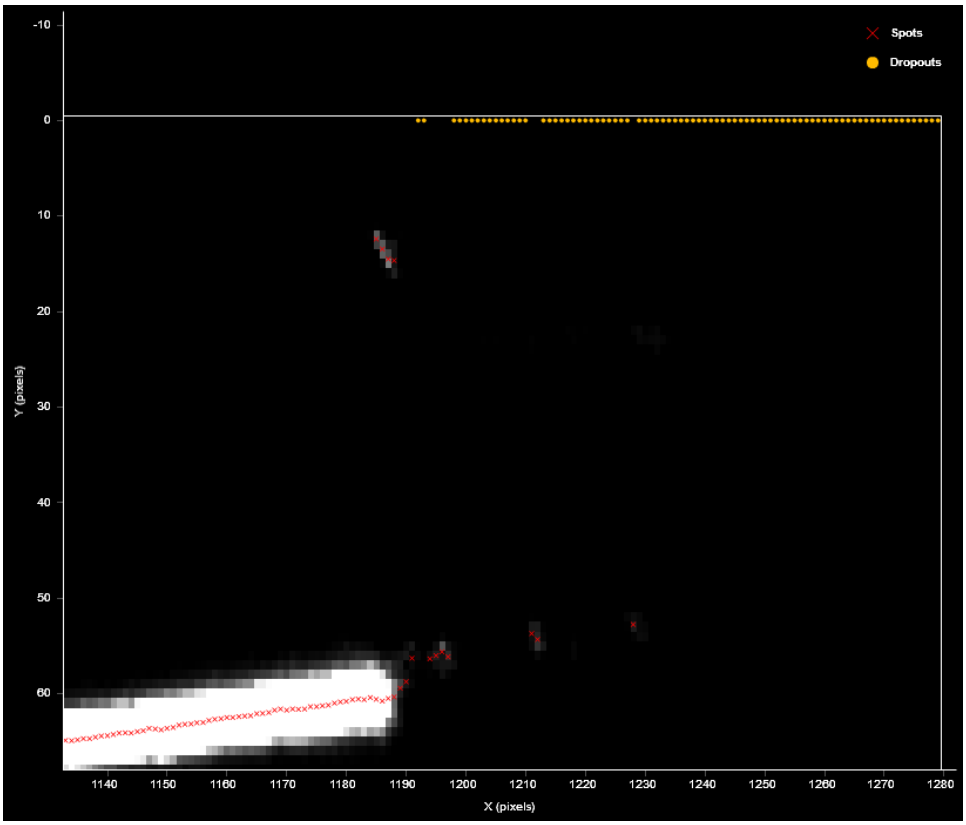


To show data dropouts:

1. Go to the **Scan** page and choose **Video** mode in the **Scan Mode** panel.
2. check the **Show Dropouts** option at the top of the data viewer.

For more information on the material settings, see *Material* on page 98.

Profile Mode

When the Gocator is in Profile scan mode, the data viewer displays profile plots.

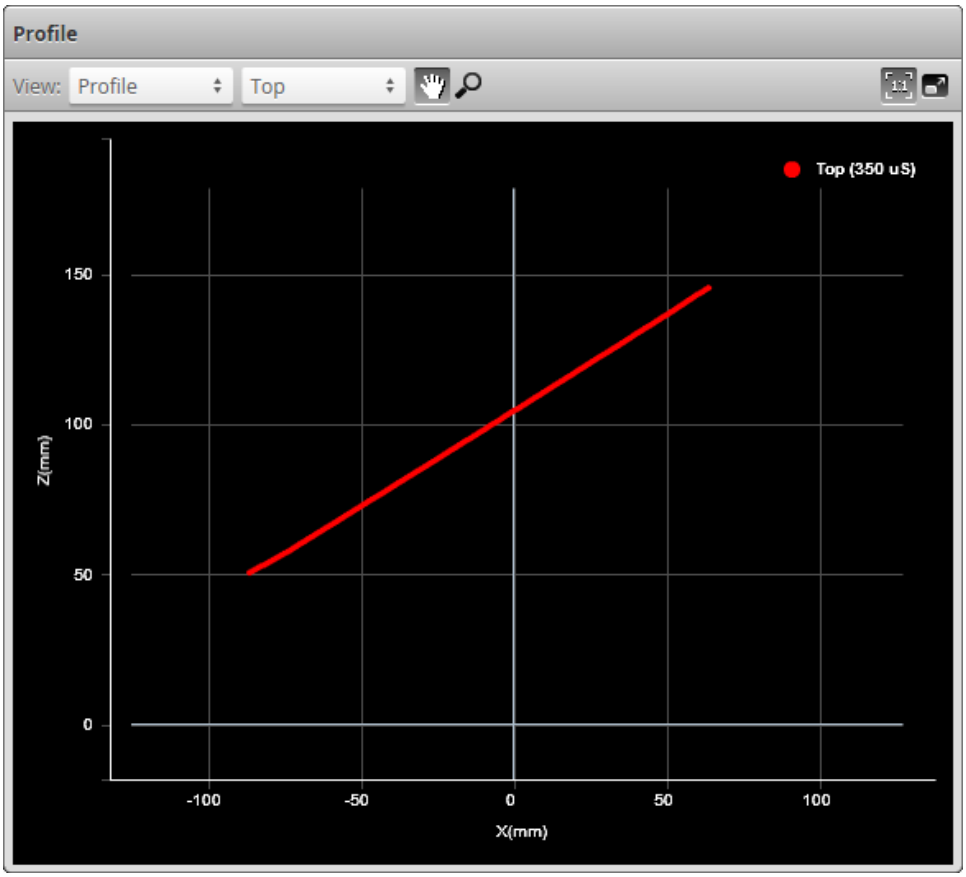

In a dual-sensor system, profiles from individual sensors or from a combined view can be displayed.

When in the **Scan** page, selecting a panel (e.g., **Sensor** or **Alignment** panel) automatically sets the display to the most appropriate display view.



To manually select the display view in the Scan page:

1. Go to the **Scan** page.
2. Choose **Profile** mode in the **Scan Mode** panel.
3. Select the view.
   Top: View from a single sensor, from the top sensor in an opposite-layout dual-sensor system, or the combined view of sensors that have been aligned to use a common coordinate system.
   Bottom: View from the bottom sensor in an opposite-layout dual-sensor system.

Left: View from the left sensor in a dual-sensor system.
Right: View from the right sensor in a dual-sensor system.
Left & Right: Views from both sensors, displayed at the same time in the data viewer, using the coordinate systems of each sensor.

In the **Measure** page, the view of the display is set to the profile source of the selected measurement tool.


Section Mode

When the Gocator is in Surface scan mode, the data viewer can display sections (profiles extracted from surfaces).



In a dual-sensor system, profiles from individual sensors or from a combined view can be displayed.

When in the **Scan** page, selecting a panel (e.g., **Sensor** or **Alignment** panel) automatically sets the display to the most appropriate display view.

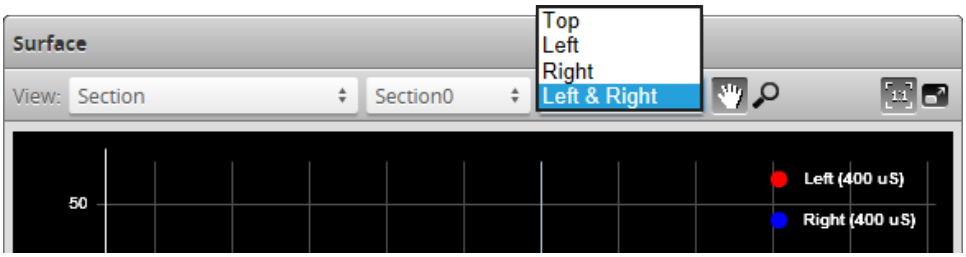

To manually select the display view in the Scan page:

1. Go to the **Scan** page.

2. Choose **Surface** mode in the **Scan Mode** panel.

3. Just above the data viewer, choose **Section** in the **View** drop-down.
   The view from an individual sensor or the combined view of two sensors can be selected from the drop-down list at the top of the data viewer.
   Top: View from a single sensor, from the top sensor in an opposite-layout dual-sensor system, or the combined view of sensors that have been aligned to use a common coordinate system.
   Bottom: View from the bottom sensor in an opposite-layout dual-sensor system.
   Left: View from the left sensor in a dual-sensor system.
   Right: View from the right sensor in a dual-sensor system.
   Left & Right: Views from both sensors, displayed at the same time in the data viewer, using the coordinate systems of each sensor.

In the **Measure** page, the view of the display is set to the profile source of the selected measurement tool.

Surface Mode


When the Gocator is in Surface scan mode, the data viewer can display height maps and intensity images. You can select the data to display from the **View** drop-down.

Clicking on the **3D** button displays Surface data in the 3D viewer. The 3D model is overlaid with the information that corresponds to the selected **View** option.




View Option	Information
Profile	Plots the last collected profile. (Only available in 2D view.)
Surface - Heightmap	In 2D view, displays the pseudo color height map. In 3D view, overlays the 2D pseudo color height map on the 3D model.
Surface - Grayscale	In 2D view, displays the grayscale height map. In 3D view, overlays the grayscale height map on the 3D model.
Surface - Uniform	Overlays a uniform shaded surface on the 3D model. (Only available in 3D view.)
Surface - Intensity	In 2D view, displays the intensity. In 3D view, overlays the intensity map on the 3D model. (**Acquire Intensity** must be checked in the **Scan Mode** panel.)


Choosing the Profile view option will switch the data viewer out of the 3D viewer and display the profile plot.

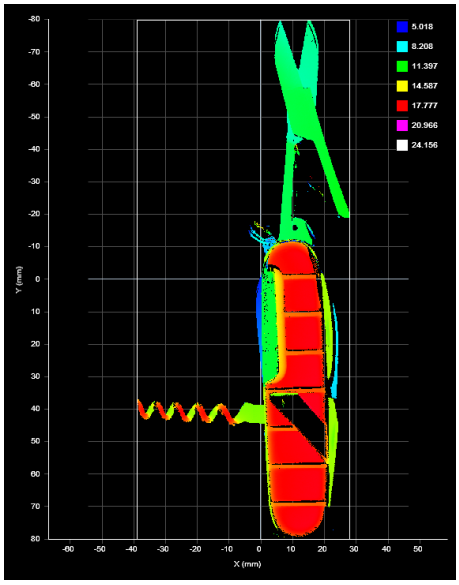


2D viewer with height map overlay

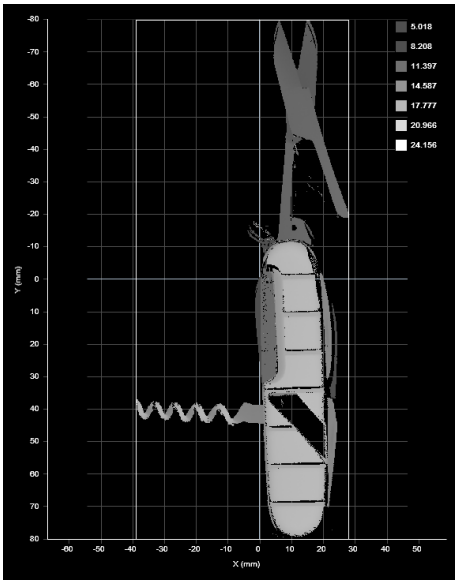


2D viewer with grayscale overlay

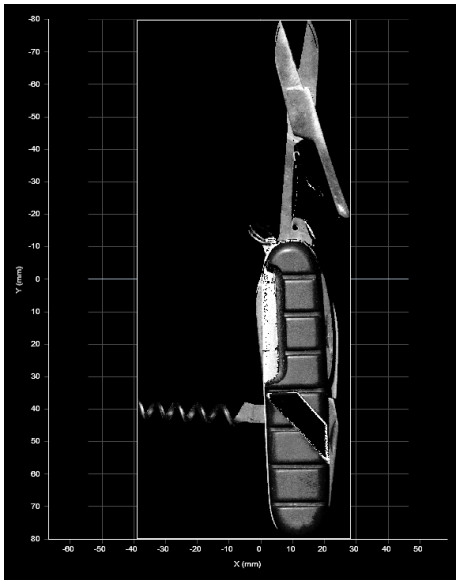


2D viewer with intensity overlay

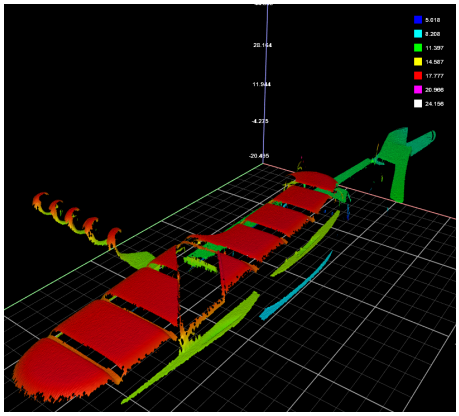


3D viewer with height map overlay

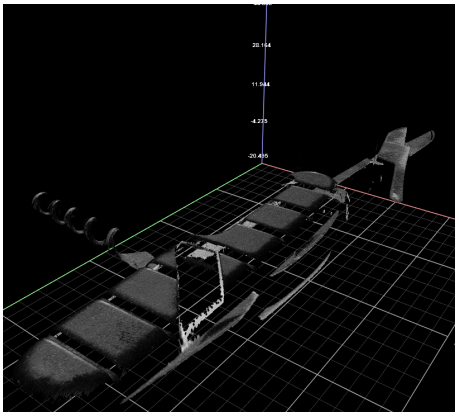

3D viewer with grayscale overlay

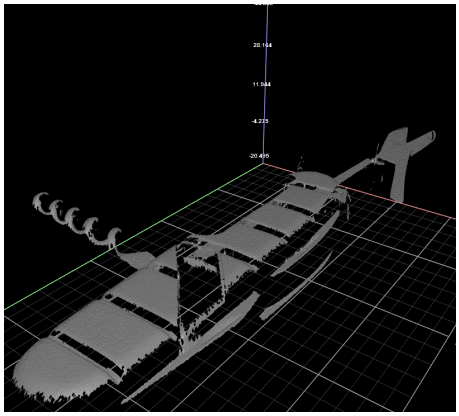

3D viewer with uniform overlay

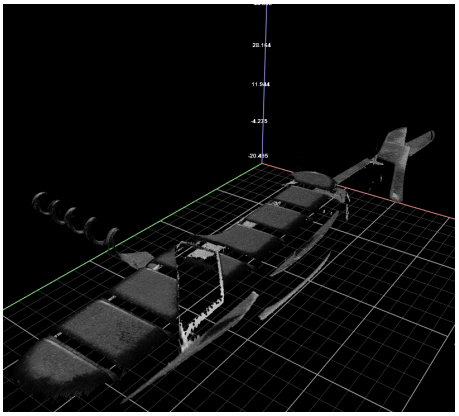

3D viewer with uniform overlay

Clicking on the **3D** button toggles between the 2D and 3D viewer. See *Data Viewer Controls* on page 116 for explanations on the available controls.


In a dual-sensor system, data from individual sensors or from a combined view can be selected. While in the **Scan** page, selecting a panel (e.g., **Sensor** or **Part Detection** panel) will automatically set the display to the most appropriate display type and display view.

To manually select the display type and the display view in the Scan page:

1. Go to the **Scan** page.
2. Select the View options in the data viewer.
   Profile, **Heightmap**, **Grayscale**, **Uniform**, or **Intensity** can be selected from the left drop-down list.
   The view from an individual sensor or the combined view of two sensors can be selected from the right drop-down list.

Height Map Color Scale

Height maps are displayed in pseudo-color. The height axis (Z) is color-coded. The scaling of the height map can be adjusted.

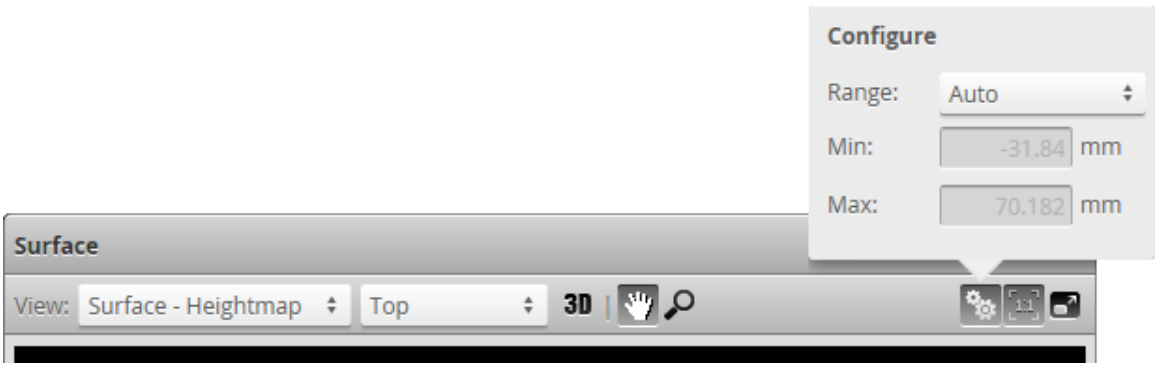


To change the scaling of the height map:

1. Select **Heightmap** from the drop-down in the data viewer.
2. Click the **Scaling** button.
   - To automatically set the scale, choose **Auto** in the **Range** drop-down.
   - To automatically set the scale based on a user-selected sub-region of the heightmap, choose **Auto - Region** in the **Range** drop-down and adjust the yellow region box in the data viewer to the desired location and size.
   - To manually set the scale, choose the **Manual** in the **Range** drop-down and enter the minimum and maximum height to which the colors will be mapped.

Region Definition

Regions, such as an active area or a measurement region, can be graphically set up using the data viewer.

When the **Scan** page is active, the data viewer can be used to graphically configure the active area. The **Active Area** setting can also be configured manually by entering values into its fields and is found in the **Sensor** panel see on page 88.

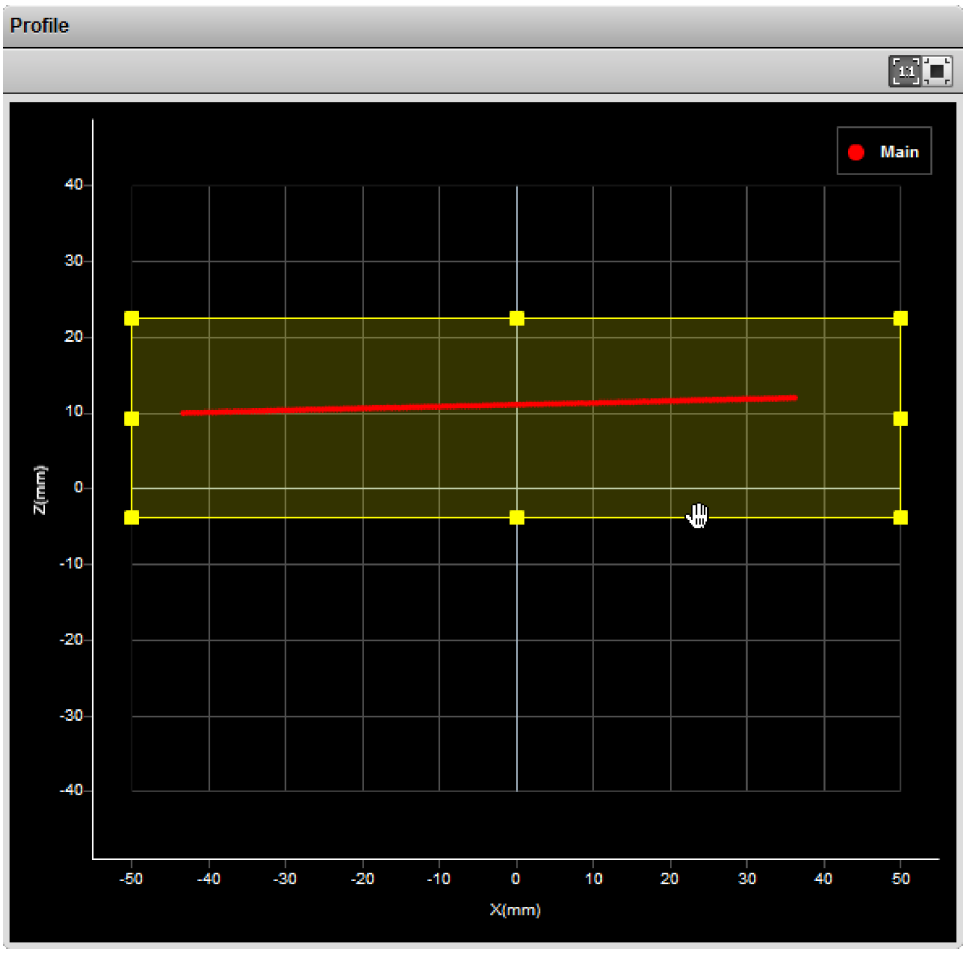

To set up a region of interest:

1. Move the mouse cursor to the rectangle.
   The rectangle is automatically displayed when a setup or measurement requires an area to be specified.
2. Drag the rectangle to move it, and use the handles on the rectangle's border to resize it.

Intensity Output

Gocator sensors can produce intensity images that measure the amount of light reflected by an object. An 8-bit intensity value is output for each range value along the laser line . Gocator applies the same coordinate system and resampling logic as the ranges to the intensity values.

Intensity output is enabled by checking the **Acquire Intensity** checkbox in the **Scan Mode** panel.




Models

The following sections describe how to set up part matching using a model, a bounding box, or an ellipse. It also describes how to configure sections.

Model Page Overview

The **Model** page lets you set up part matching and sections.

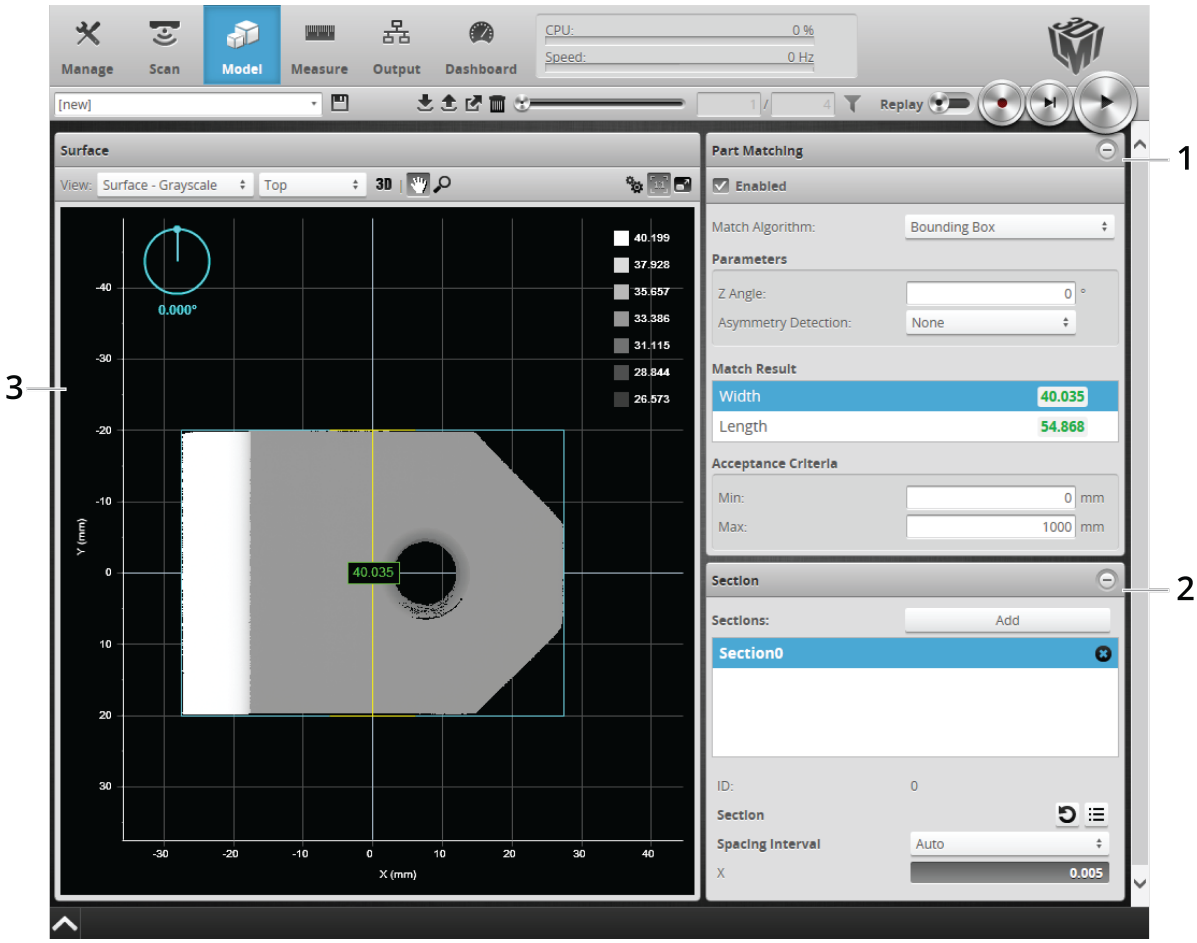

	Element	Description
1	Part Matching panel	Contains settings for configuring models and for part matching.
2	Sections panel	Contains settings for configuring sections, which let you extract profiles from surfaces.
3	Data Viewer	Displays sensor data and lets you add and remove model edge points.

Part Matching


Gocator can match scanned parts to the edges of a model based on a previously scanned part (see *Using Edge Detection* on page 129) or to the dimensions of a fitted bounding box or ellipse that encapsulate the model (see *Using Bounding Box and Ellipse* on page 138). When parts match, Gocator can rotate scans so that they are all oriented in the same way. This allows measurement tools to be applied consistently to parts, regardless of the orientation of the part you are trying to match.

When the match quality between a model and a part reaches a minimum value (a percentage), or the bounding box or ellipse that encapsulates the part is between minimum and maximum dimension values, the part is "accepted" and any measurements that are added in the **Measure** page will return valid values, as long as the target is in range, etc. If the part is "rejected," any measurements added in the **Measure** page will return an Invalid value. For more information on measurements and decision values, see on page 148.

Using Edge Detection

When using edge detection for part matching, the Gocator compares a model that you must create from a previous scan to a "target" (one of the parts you want to match to the model).

In the data viewer, a model is represented as a yellow outline. The target is represented as a blue outline. If the part match quality above a minimum user-defined level, any measurements configured on the **Measure** page are applied.

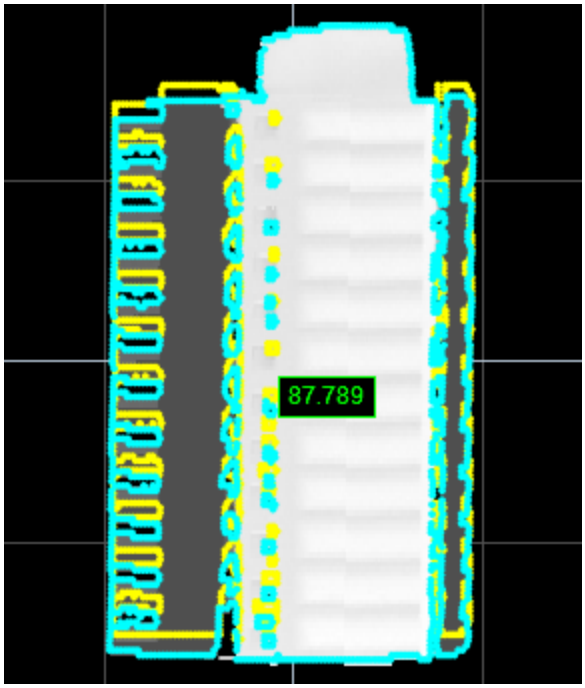

Model (yellow outline) and target (blue outline). Part match quality is 87.789%, which is greater than the minimum set by the user, so the parts match.

When you create a model, the Gocator runs an edge detection algorithm on either the heightmap or intensity image of a scanned part. The resulting model is made up of the detected edge points. The scan used to create the model should be of a reference (or "golden") part to which all other parts will be compared.


After the model has been created, you optionally modify the model by adjusting the sensitivity (how many edge points are detected), or selectively remove edge points from the model, to improve matching.

Models are saved as part of a job.


Once you have finished modifying the model, you can also modify target sensitivity, which controls how many edge points are detected on the subsequently scanned targets that will be compared to the model; the same edge detection algorithm used for creating models is used to compare a model to a part.

Typically, setting up edge detection to perform part matching involves the following steps:

1. Scan a reference part (you can also use replay data that you have previously saved).
2. Create a model based on the scan (using either heightmap or intensity data).
3. Adjust the model (edge detection algorithm sensitivity and selective removal of edge points).
4. Scan another part typical of the parts that would need to match the model.
5. Adjust the target sensitivity.
6. Set match acceptance level.

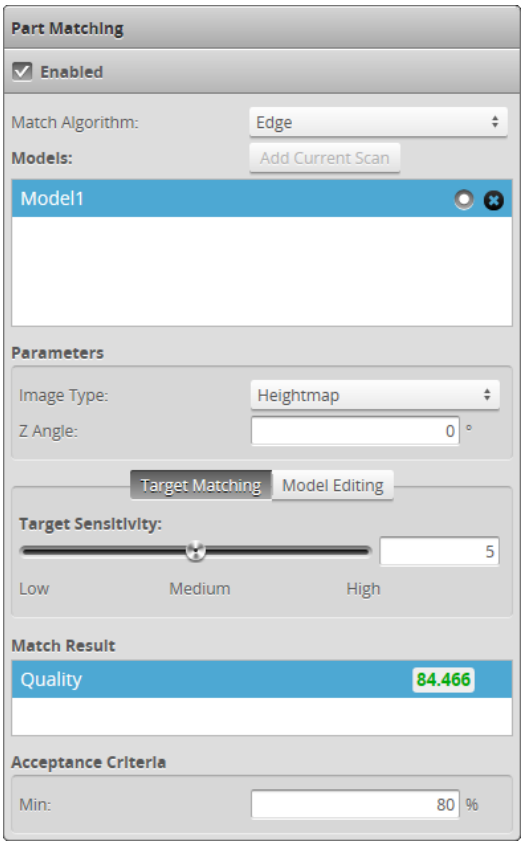

Part Matching panel showing Target Matching tab

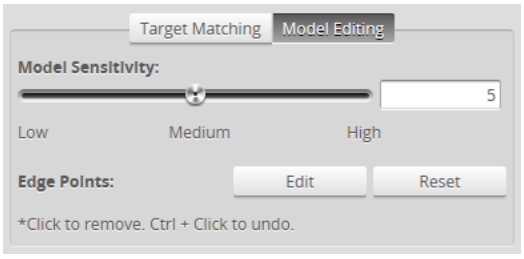

Model Editing tab on Part Matching panel

The following settings are used to configure part matching using edge detection.

Setting	Description
Match Algorithm	Determines which algorithm the sensor will use to attempt a match. Set this to **Edge** for edge detection.
Image Type	Determines what kind of data the Gocator will use to detect edges and therefore for part matching. Choose this setting based on the kinds of features that will be used for part matching: **Heightmap**: Surface elevation information of the scanned part will be used to determine edges. This setting is most commonly used. **Intensity**: Intensity data (how light or dark areas of a scanned part are) will be used to determine edges. Use this setting if the main distinguishing marks are printed text or patterns on the parts. The **Acquire Intensity** option must be checked in the **Scan Mode** panel on the **Scan** page for this option to be available.
Z Angle	Corrects the orientation of the model to accurately match typical orientation and simplify measurements.
Target Sensitivity (**Target Matching** tab)	Controls the threshold at which an edge point is detected on the target's heightmap or intensity image. (The "target" is any part that is matched to the model and which will subsequently be measured if the match is accepted.) Setting **Target Sensitivity** higher results in more edge points. Setting it lower results in fewer edge points and results in higher performance. Use this setting to exclude noise from the detected edges and to make sure distinguishing features are properly detected. The level of this setting should generally be similar to the level of **Model Sensitivity**.
Model Sensitivity (**Model Editing** tab)	Controls the threshold at which an edge point is detected on the heightmap or intensity image used to create the model. Setting **Model Sensitivity** higher results in more edge points. Setting it lower results in fewer edge points and results in higher performance. Use this setting to exclude noise from the detected edges and to make sure distinguishing features are properly detected. The level of this setting should generally be similar to the level of **Target Sensitivity**. Changing this setting causes the edge detection algorithm to run again at the new threshold. If you have edited edge points manually (removing them selectively), those changes will be lost. See *Using Edge Detection* on page 129 for more information.
Edge Points (**Model Editing** tab)	The **Edit** button lets you selectively remove edge point that are detected by the edge detection algorithm at the current **Model Sensitivity** setting. See *Using Edge Detection* on page 129 for more information.
Acceptance Criteria	Determines the minimum quality level of the match as a percentage value. *Part rejected: Quality result is less than Min*

To run part matching, simply make sure that the **Enabled** option is checked on the **Part Matching** panel when the Gocator is running. Any measurements that are added and configured on the **Measure**


page will be applied to parts if a part match is accepted, regardless of the part's orientation (a successfully matched part is rotated to match orientation of the model), returning a value and decision (as long as the part is in range, etc.). If a part match is rejected, measurements will return an Invalid value.

Creating a Model

Gocator creates a model by running an edge detection algorithm on the heightmap or intensity image of a scan. The algorithm is run when a model is first created and whenever the **Model Sensitivity** setting is changed.

To create a model:


1. Go to the **Scan** page.
   a. In the **Scan Mode** panel, choose **Surface**.

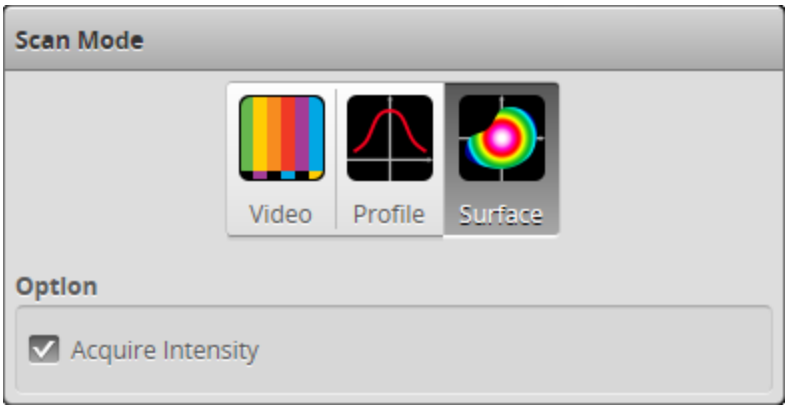

   You must choose **Surface** in order to scan a part. Furthermore, the **Model** page is only displayed in Surface mode.

   b. If you want to use intensity data to create the model, make sure **Acquire Intensity** is checked.

   c. In the **Part Detection** panel, choose **Part** for the **Frame of Reference**.

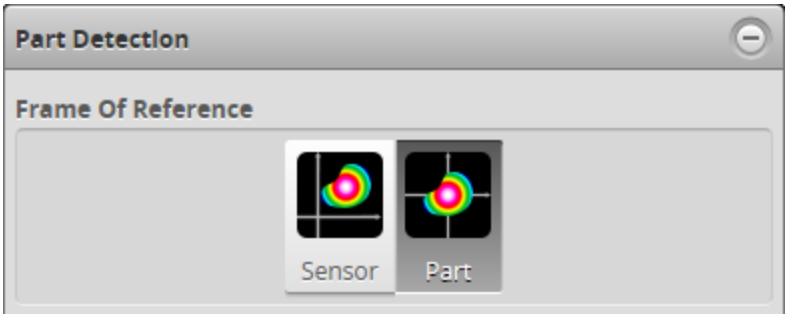


   Part matching is only available when **Part** has been selected.

2. Do one of the following:
   - Scan a reference part. See *Scan Setup and Alignment* on page 81 for more information on setting up and aligning Gocator. See *Running a Standalone Sensor System* on page 35 or *Running a Dual-Sensor System on page 36* for more information on running a system to scan a part.

- Locate some previously recorded replay data and load it. See *Recording, Playback, and Measurement Simulation* on page 58 and *Downloading, Uploading, and Exporting Replay Data on page 61* for more information on replay data.


3. Go to the **Model** page.
   a. Make sure the **Enabled** option is checked in the **Part Matching** panel.
   b. In the **Match Algorithm** drop-down, choose **Edge**.

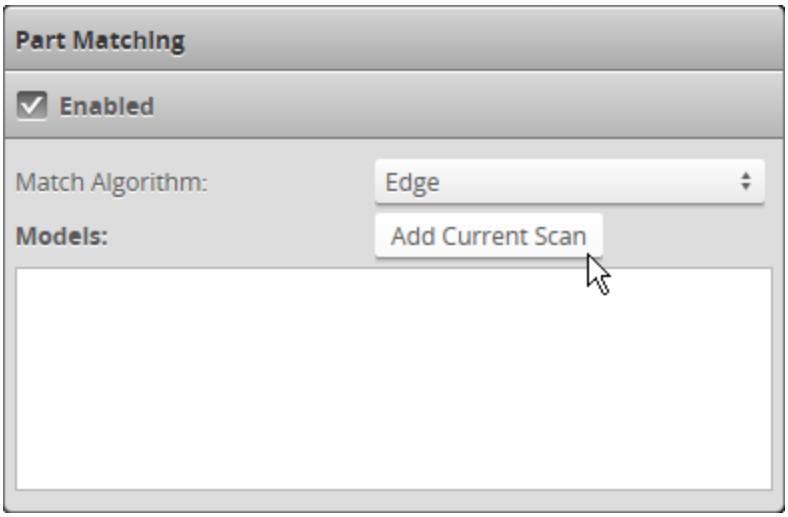

4. Click **Stop** on the toolbar if the sensor is running.
5. Click **Add Current Scan**.

> After adding the model, the Gocator will show that the match quality is 100%, because it is in effect comparing the model to the scan that was used to create the model. This value can be ignored.

6. In the **Image Type** drop-down, choose **Heightmap** or **Intensity**.

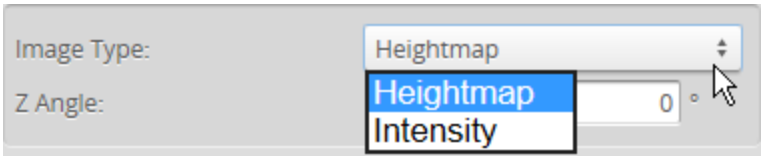

7. If you need to correct the orientation of the model, provide a value in the **Z Angle** field.

   Correcting the Z angle is useful if the orientation of the model is not close to the typical angle of target parts on the production line.

8. Save the job by clicking the **Save** button .

   Models are saved in job files.

   See *Creating, Saving and Loading Jobs (Settings)* on page 56 for more information on saving jobs.

After you have created a model, you may wish to modify it to remove noise to improve its matching capabilities. You may also wish to modify a model to exclude certain areas. See *Creating a Model* on the previous page for more information.

Model names can be renamed.

To rename a model:

1. In the **Models** list, double-click on a model name.
2. Type a new name in the model name field.
3. Press Enter or click outside the model name field.
4. Save the job by clicking the **Save** button .


To delete a model, click the button.

Modifying a Model's Edge Points


Modifying a model's edge points is useful to exclude noise in the detected edge points and to make sure distinguishing features are properly detected, which can improve matching. You can modify edge points in two ways.

First, you can control the overall number of edge points that are detected by the edge detection algorithm by raising and lowering the edge detection threshold (the **Model Sensitivity** setting). Modifying **Model Sensitivity** causes the edge detection algorithm to run again.

Second, you can fine-tune the model's edge points by selectively removing edge points that are detected by the edge detection algorithm. This could be useful, for example, if an edge on the target parts frequently presents minor variations such as flashing (excess material caused by leakage during molding): the edge points that make up the model can be edited to exclude that region. Editing the model can allow parts to match it more easily.

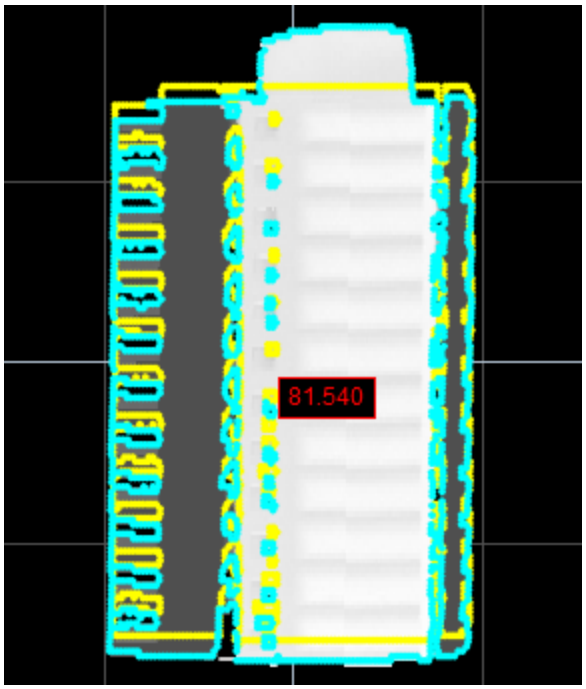

Edge points along top of model not removed.
Part is rejected. (Min set to 85%.)

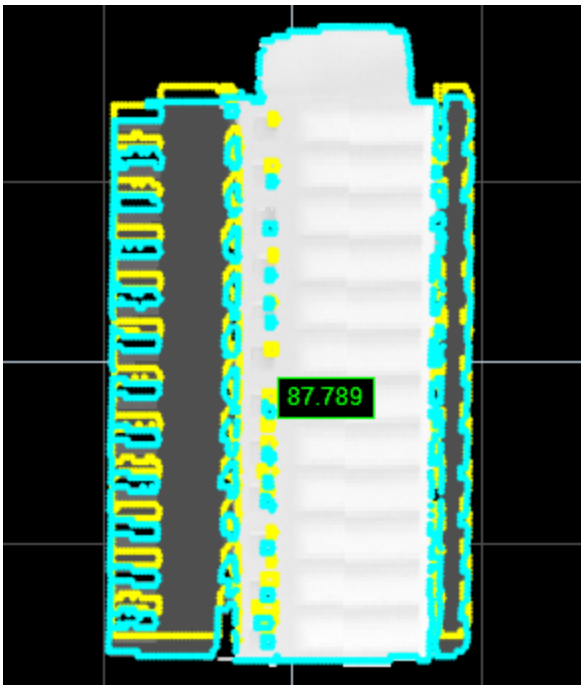

Edge points along top of model removed.
Part is accepted. (Min set to 85%.)


Removing edge points does not cause the edge detection algorithm to run again.

To change model senstivity:

1. In the **Models** list, select the model you want to configure by clicking on its selection control.



2. Click the **Model Editing** tab.
3. Adjust the **Model Sensitivity** slider to exclude noise and to properly detect the distinguishing features that will match parts.

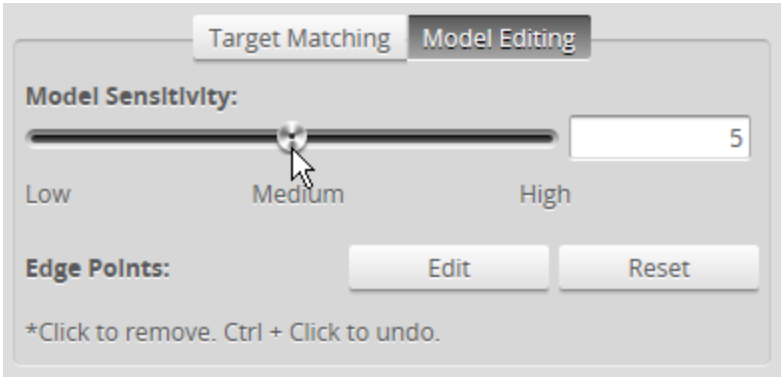

You can also set the sensitivity value manually in the provided text box.


4. Save the job by clicking the **Save** button .

To manually remove model edge points:

1. In the **Models** list, select the model you want to configure by clicking on its selection control.




2. In the **Model Editing** tab, click on the **Edit** button.

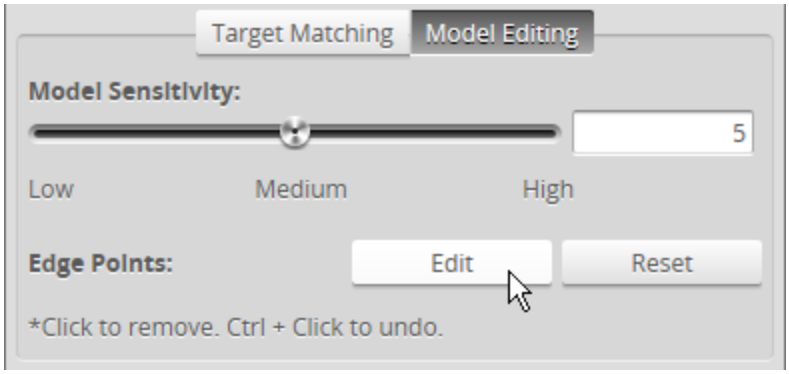

3. On the toolbar above the data viewer, make sure the **Select** tool is active.



4. Click in the data viewer and hold the mouse button while moving the pointer over the edge points you want to remove.

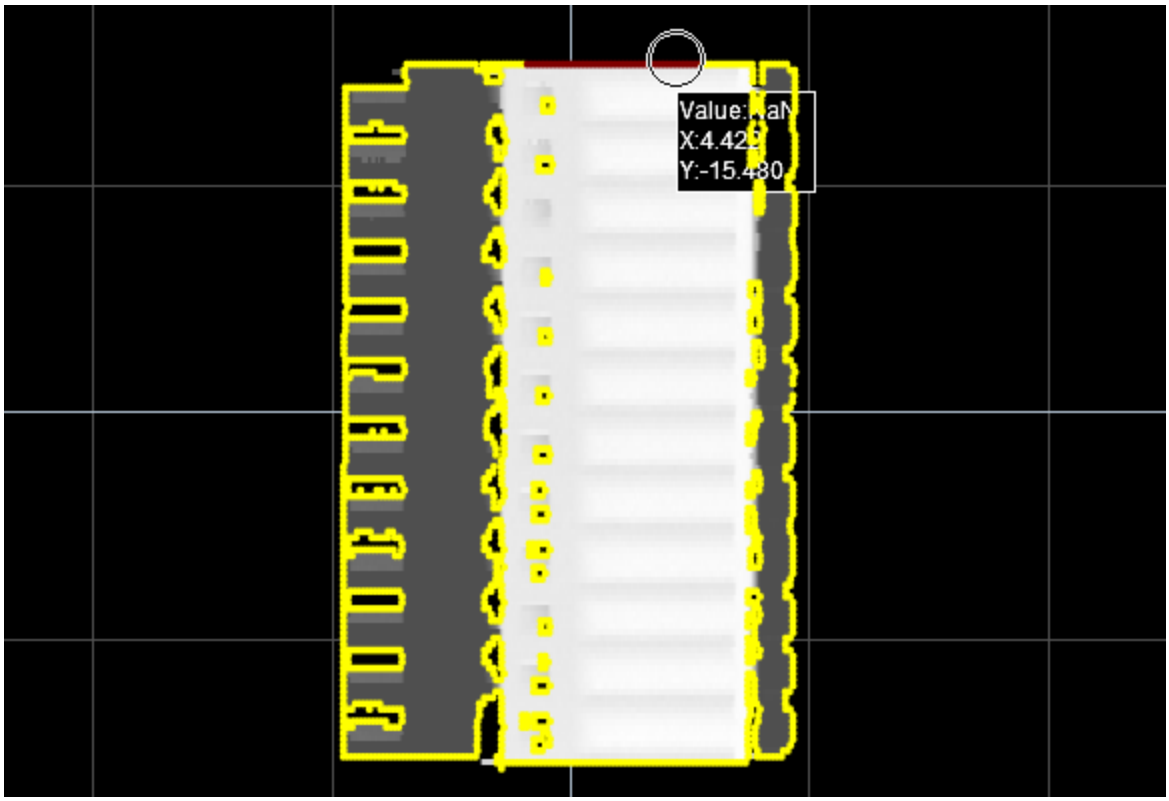

Points within the circular **Select** tool are removed from the model. Removed edge points turn red in the data viewer.

You can zoom in to see individual edge points by using the mouse wheel or by using the Zoom mode ( ).

5. If you have removed too many edge points, use Ctrl + Click in the data viewer to add the edge points back.
6. When you have finished editing the model, click **Save** in the **Model Editing** tab.
7. Save the job by clicking the **Save** button on the toolbar.


Adjusting Target Sensitivity

After you have added a model and optionally adjusted it, you must scan a different part, one that is typical of parts that must match the model.

Much in the same way that you can adjust a model's sensitivity, you can adjust the target sensitivity, that is, the threshold at which edge points are detected on the heightmaps or intensity images of parts that you want to match to the model. Adjusting the target sensitivity is useful to exclude noise, improving part matching.

To change target senstivity:


1. Click the **Target Matching** tab.
2. Adjust the **Target Sensitivity** setting to exclude noise in order to properly detect the distinguishing features that will allow parts to match.

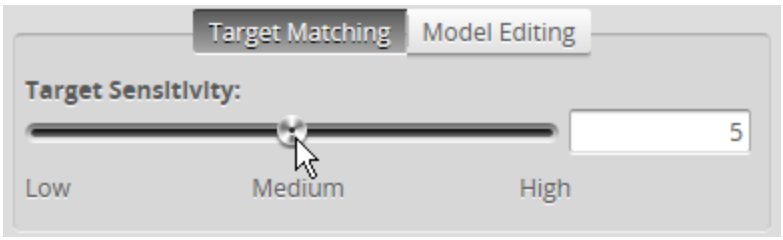


You can also set the sensitivity value manually in the provided text box.

Setting the Match Acceptance Criteria

In order for a part to match a model, the match quality must reach the minimum set in the **Min** field in **Acceptance Criteria** section of the **Part Matching** panel.

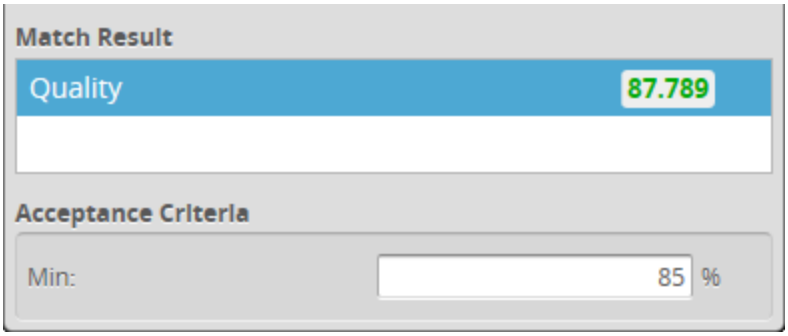

Part accepted: Quality result is greater than Min

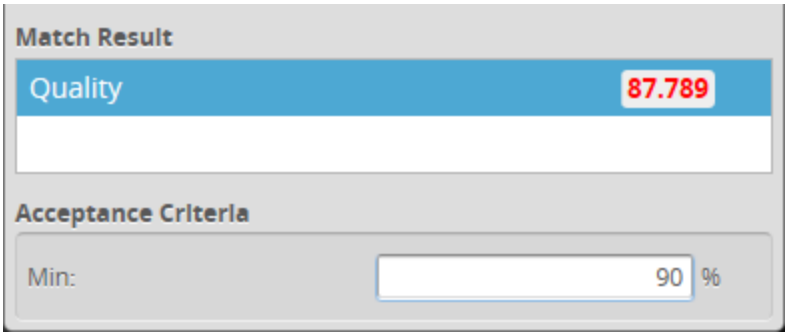


Running Part Matching

To run part matching, simply make sure that the **Enabled** option is checked on the **Part Matching** panel when the Gocator is running. Any measurements that are added and configured on the **Measure** page will be applied to parts if a part match is accepted, regardless of the part's orientation (a successfully matched part is rotated to match orientation of the model), returning a value and decision (as long as the part is in range, etc.). If a part match is rejected, measurements will return an Invalid value.

Using Bounding Box and Ellipse

When using a bounding box or an ellipse to match parts, the Gocator tests whether a part fits into a bounding box or ellipse that you define. A match will occur regardless of orientation.


In the data viewer, a bounding box or ellipse is displayed with a blue outline. If a part fits in the bounding box or ellipse, any measurements configured on the **Measure** page are applied.

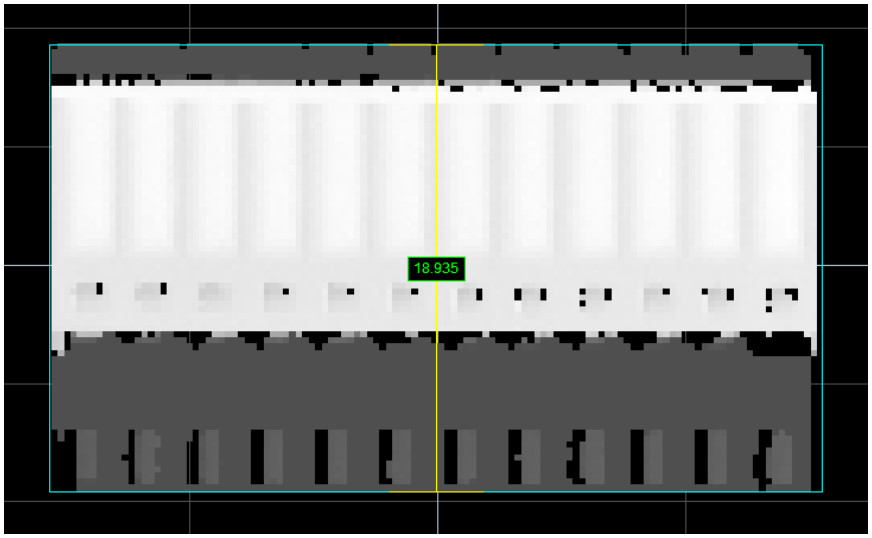

Blue bounding box around a part.
(Yellow lines show currently selected dimension in Part Matching panel.)

Typically, setting up a bounding box or an ellipse to perform part matching involves the following steps:

1. Scan a reference part (you can also use replay data that you have previously saved).
2. Set the characteristics of the bounding box (width and length) or ellipse (major and minor axes).

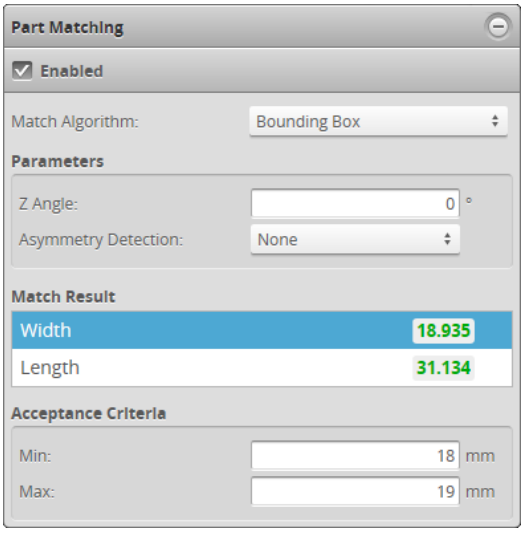

Part Matching panel (Bounding Box match algorithm)

The following settings are used to configure part matching using a bounding box or ellipse.

Setting	Description
Match Algorithm	Determines which algorithm the sensor will use to attempt a match. Set this to


Setting	Description
	Bounding Box or **Ellipse**.
Z Angle	Corrects the orientation of the bounding box or ellipse to accurately match typical orientation and simplify measurements.
Asymmetry Detection	Rotates scans based on the asymmetry of the scanned part. Gocator calculates the number of points on each side of the part's centroid in the bounding box or ellipse. **Along Major Axis** – The scan is flipped so that the greater number of points is to the left. **Along Minor Axis** – The scan is flipped so that the greater number of points is on the bottom. **None** – The scan is not flipped.
Acceptance Criteria	Determines the minimum and maximum acceptable values of the selected dimension (Width and Length for bounding box, Major and Minor for ellipse) in **Match Result**.

Configuring a Bounding Box or an Ellipse

To use a bounding box or an ellipse to match a part, you must set its dimensions, taking into account expected acceptable variations when compared to a reference (or "golden") part.

To configure a bounding box or ellipse for part matching:


1. Go to the **Scan** page.
   a. In the **Scan Mode** panel, choose **Surface**.

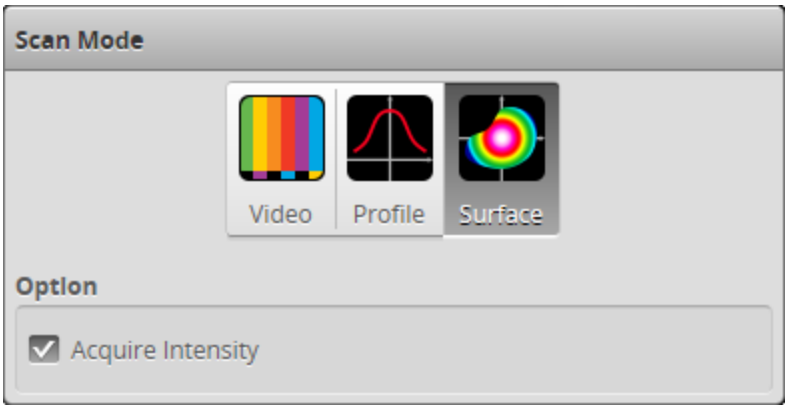

   You must choose **Surface** in order to scan a part. Furthermore, the **Model** page is only displayed in Surface mode.


   Intensity data is not used when part matching using a bounding box or an ellipse, but you can enable the **Acquire Intensity** option if you need intensity data for other reasons.

   b. In the **Part Detection** panel, choose **Part** for the **Frame of Reference**.

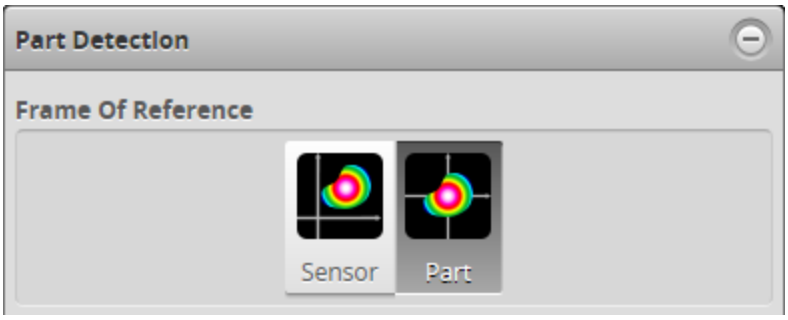

Part matching is only available when **Part** has been selected.

2. Do one of the following:
   - Scan a reference part. See *Scan Setup and Alignment* on page 81 for more information on setting up and aligning Gocator. See *Running a Standalone Sensor System* on page 35 or *Running a Dual-Sensor System on page 36* for more information on running a system to scan a part.
   - Locate some previously recorded replay data and load it. See *Recording, Playback, and Measurement Simulation* on page 58 and *Downloading, Uploading, and Exporting Replay Data on page 61* for more information on replay data.
3. Go to the **Model** page.
   a. Make sure the **Enabled** option is checked in the **Part Matching** panel.
   b. In the **Match Algorithm** drop-down, choose **Bounding Box** or **Ellipse**.

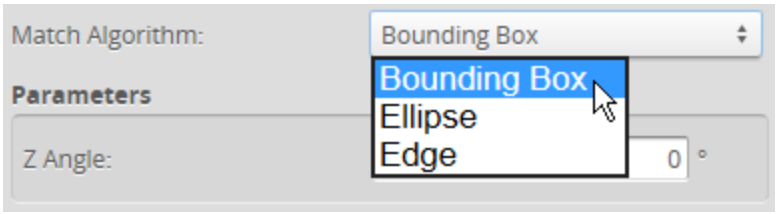

4. Set **Min** and **Max** of both of the dimensions of the selected match algorithm shape, taking into account expected acceptable variations.
   - If you chose **Bounding Box** for the match algorithm, select **Width** and then **Length** in **Match Result**, setting the minimum and maximum values acceptable for each dimension.
   - If you chose **Ellipse** for the match algorithm, select **Minor** and then **Major** in **Match Result**, setting the minimum and maximum values acceptable for each dimension.
5. Save the job by clicking the **Save** button .

   See *Creating, Saving and Loading Jobs (Settings)* on page 56 for more information on saving jobs.

Running Part Matching

To run part matching, simply make sure that the **Enabled** option is checked on the **Part Matching** panel when the Gocator is running. Any measurements that are added and configured on the **Measure** page will be applied to parts if a part match is accepted, regardless of the part's orientation (a successfully matched part is rotated to match orientation of the bounding box or ellipse), returning a value and decision (as long as the part is in range, etc.). If a part match is rejected, measurements will return an Invalid value.

Using Part Matching to Accept or Reject a Part

Part matching results only determine whether a measurement is applied to a part. Whether the measurement returns a pass or fail value—its decision—depends on whether the measurement's value is between the **Min** and **Max** values set for the measurement. This decision, in addition to the actual value, can in turn be used to control a PLC for example. The part matching "decision" itself is not passed to the Gocator output, but you can simulate this by setting up a measurement that will always pass if it is applied.

For example, you could set up a Position Z measurement, choosing Max Z as the feature type, and setting the **Min** and **Max** values to the measurement range of the sensor. This way, as long as a part matches and the target is in range, etc., the measurement will pass. This measurement decision, which is passed to the Gocator's output, could in turn be used to control a PLC.

Sections


In Surface mode, Gocator can also extract a profile from a surface or part using a line you define on that surface or part. The resulting profile is called a "section." A section can have any orientation on the surface, but its profile is parallel to the Z axis.

You can use most profile measurement tools on a section (you can't use tools that work with unresampled data). You can therefore use measurements that are not otherwise possible in Surface mode, for example:


- Gap and flush measurements
- Surface radius measurements (for example, rounded edges or corners)
- Intersections
- Point-to-point dimension measurements between profile features

Gocator supports multiple sections, letting you take multiple measurements on the same object.


On the **Output** page, in Surface mode, you can output both surface measurements and section-based profile measurements at the same time. Gocator can also output the surfaces and section profiles themselves at the same time.

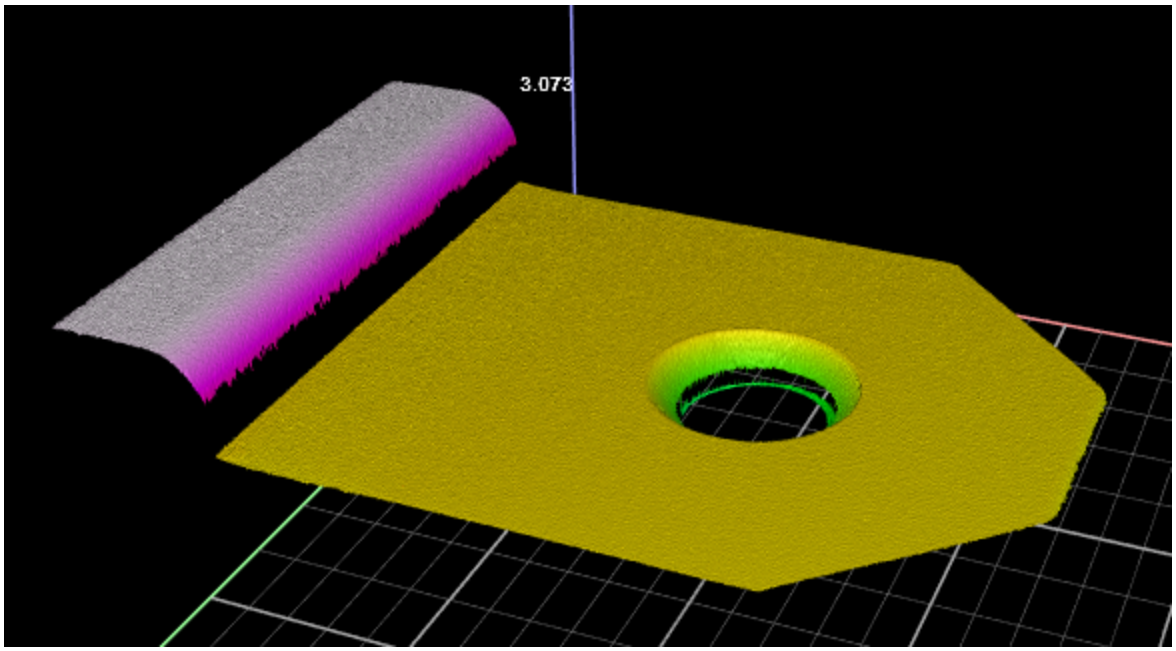

Part in data viewer (3D view)

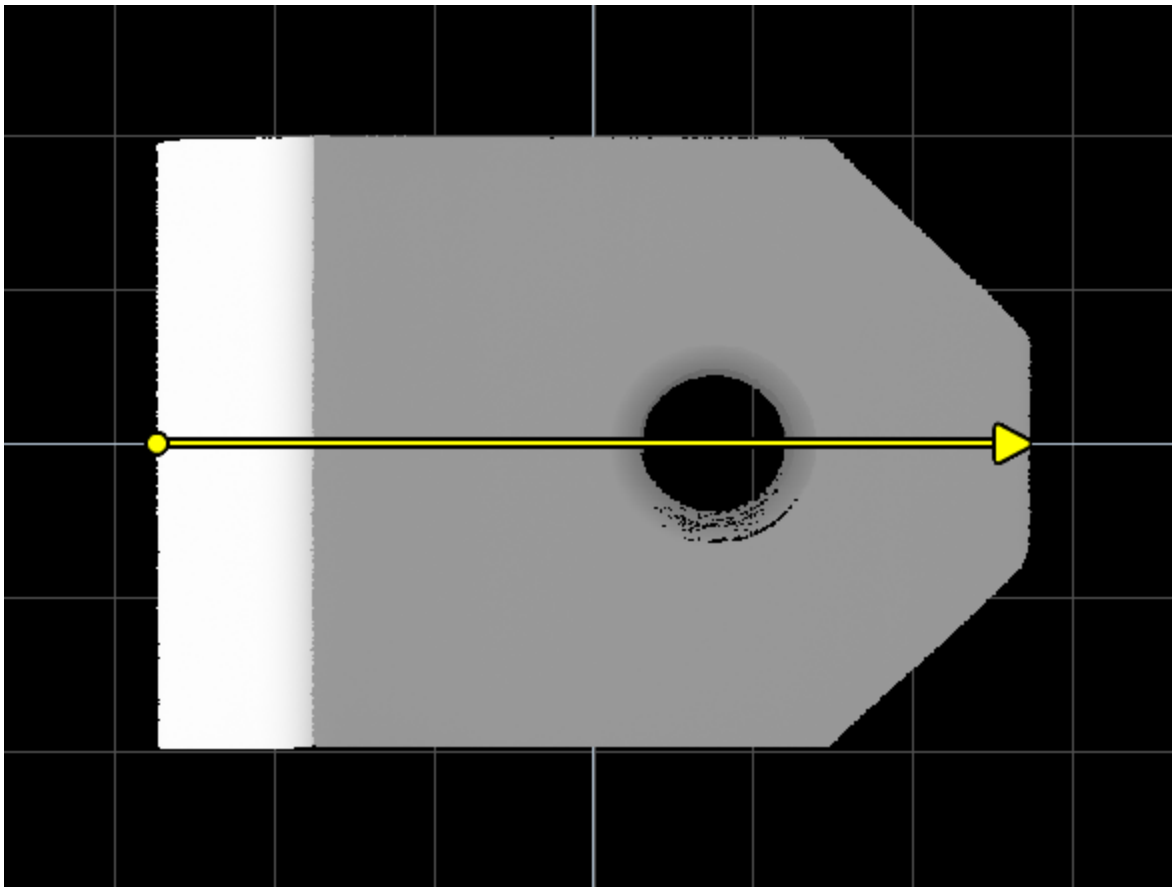


Section defined on top of part (2D view)

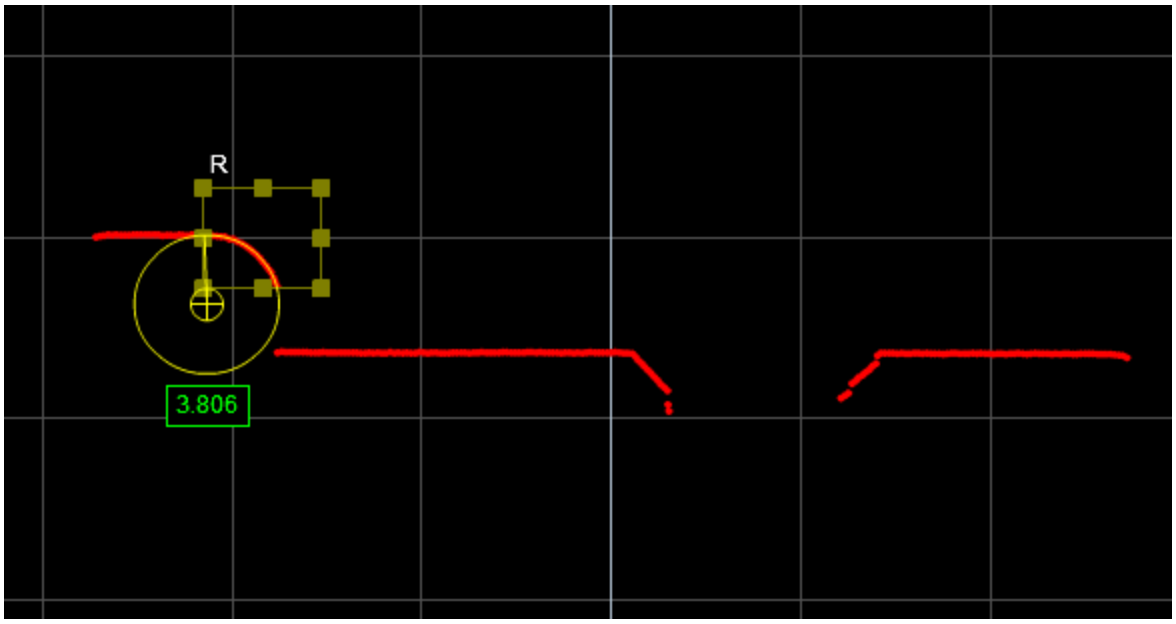


Circle Radius measurement running on profile extracted from surface using defined section

You can configure the sampling distance between points along the section. Reducing the sampling distance reduces the resolution of the profile, but increases the sensor's performance and results in less data being sent over the output.

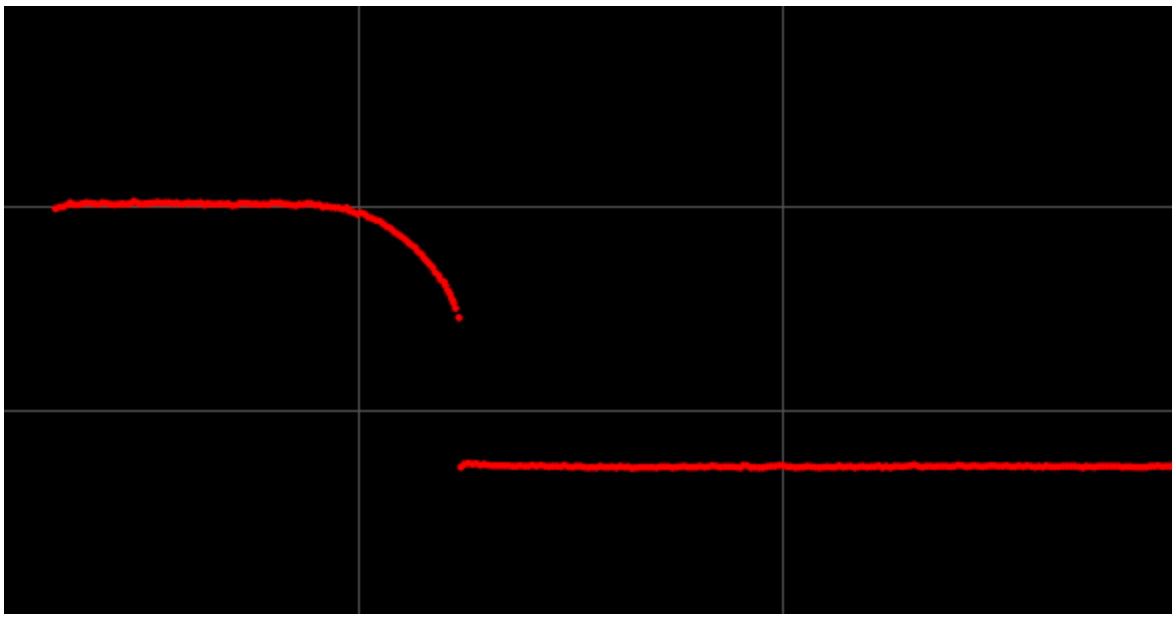

Mininum spacing interval: highest profile resolution, greater sensor CPU usage and data output

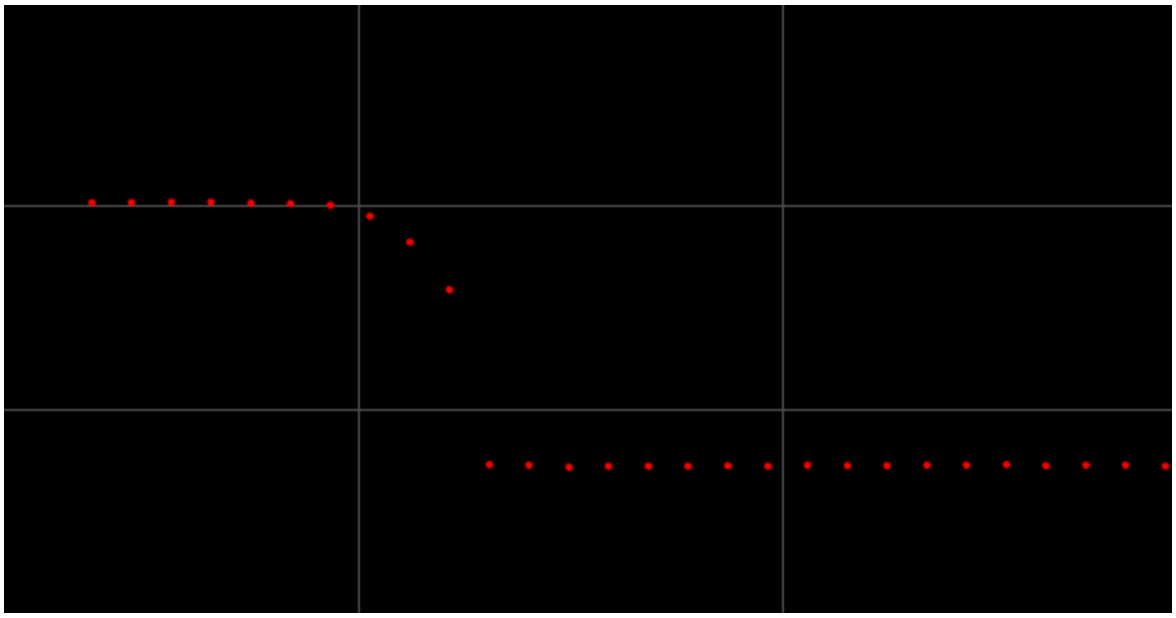

Maximum spacing interval: lowest profile resolution, lower sensor CPU usage and data output


> Using a higher spacing interval can produce different measurement results compared to using a smaller spacing interval. You should therefore compare results before using sections in production.

The sections you add to a surface are directional, and their start and end points are defined using X and Y coordinates. The start point always corresponds to the leftmost point on the extracted profile, whereas the end point always corresponds to the rightmost point on the extracted profile, no matter the orientation of the section on the surface.

For more information on profile tools, see *Profile Measurement* on page 159.

Creating a Section

In order to create a section, you should first scan a target in Surface mode to create a surface on which you can create the section. You can use either live data or recorded data. Although you can create a section *without* a surface scan, creating a section on a surface scan lets you position the section properly.

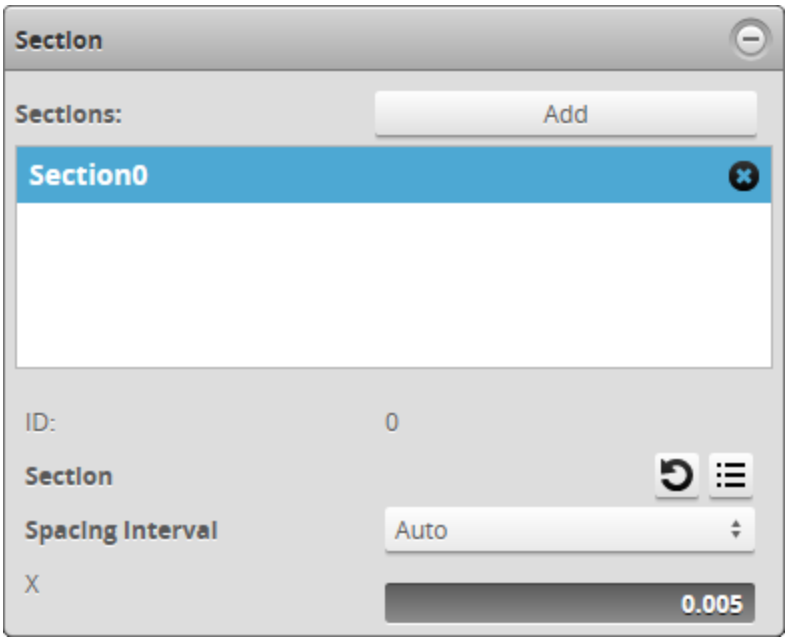

After creating a section, the following settings are available:

Setting	Description
Spacing Interval	Determines the space between the points of the extracted profile. **Auto** - The highest resolution, calculated using the X and Y resolution of the scan. **Custom** - Lets you set the spacing interval by using a slider or setting the value manually.
Section	Lets you manually set the X and Y coordinates of the start and end points of the section. Setting the coordinates manually is especially useful if you need to create a section that is perfectly horizontal or vertical. For example, to create a perfectly horizontal section, copy the Y value of either the start or end point to the other point's Y field. You can reverse the start and end points by clicking the button. To reset the start and end points to their initial values, click the button.

To create a section:

1. On the **Scan** page, in the **Scan Mode** panel, click **Surface**.
2. On the **Model** page, in the **Section** panel, click **Add**.

   You may need to click the button to expand the panel.

   Gocator creates a section on the surface.
3. Move the section and adjust the start and end points of the section to extract the desired profile.

   You can move or adjust the section graphically in the data viewer, or you can manually adjust the X and Y coordinates of the section.
4. (Optional) Adjust the **Spacing Interval**.

After you create a section, Gocator lists the profile measurement tools in the **Tools** panel on the **Measure** page. If you have created more than one section, you must select it in the tool. For more information on profile measurement tools, see *Profile Measurement* on page 159.

Gocator also adds a **Section** option to the **View** drop-down above the data viewer, which lets you view an extracted profile.

If parts are not consistently oriented in the same way, you can use part matching to correct their rotation. Parts will then be consistently oriented, and sections will fall on the same area on each part. You can also use anchoring to ensure that measurements are consistently placed on a part.

> Only one section can be visualized and configured at a time.

Deleting a Section

When you delete a section, Gocator removes any associated measurements. After you remove the last section, Gocator no longer displays profile measurement tools in the **Measure** page.

To delete a section:

1. On the **Scan** page, in the **Scan Mode** panel, click **Surface**.
2. On the **Model** page, in the **Section** panel, click the button of the section you want to delete.

   You may need to click the button to expand the panel.

   If you have associated a measurement tool to the section by setting the tool's **Stream** setting to the section, Gocator asks if you want to delete all of the associated measurement tools.

   Gocator deletes the section on the surface.


Measurement

The following sections describe the Gocator's tools and measurements.

Measure Page Overview

Measurement tools are added and configured using the **Measure** page.

The content of the **Tools** panel in the **Measure** page depends on the current scan mode. In Profile mode, the **Measure** page displays tools for profile measurement.In Surface mode, the **Measure** page displays tools for surface measurement. In Video mode, tools are not accessible.

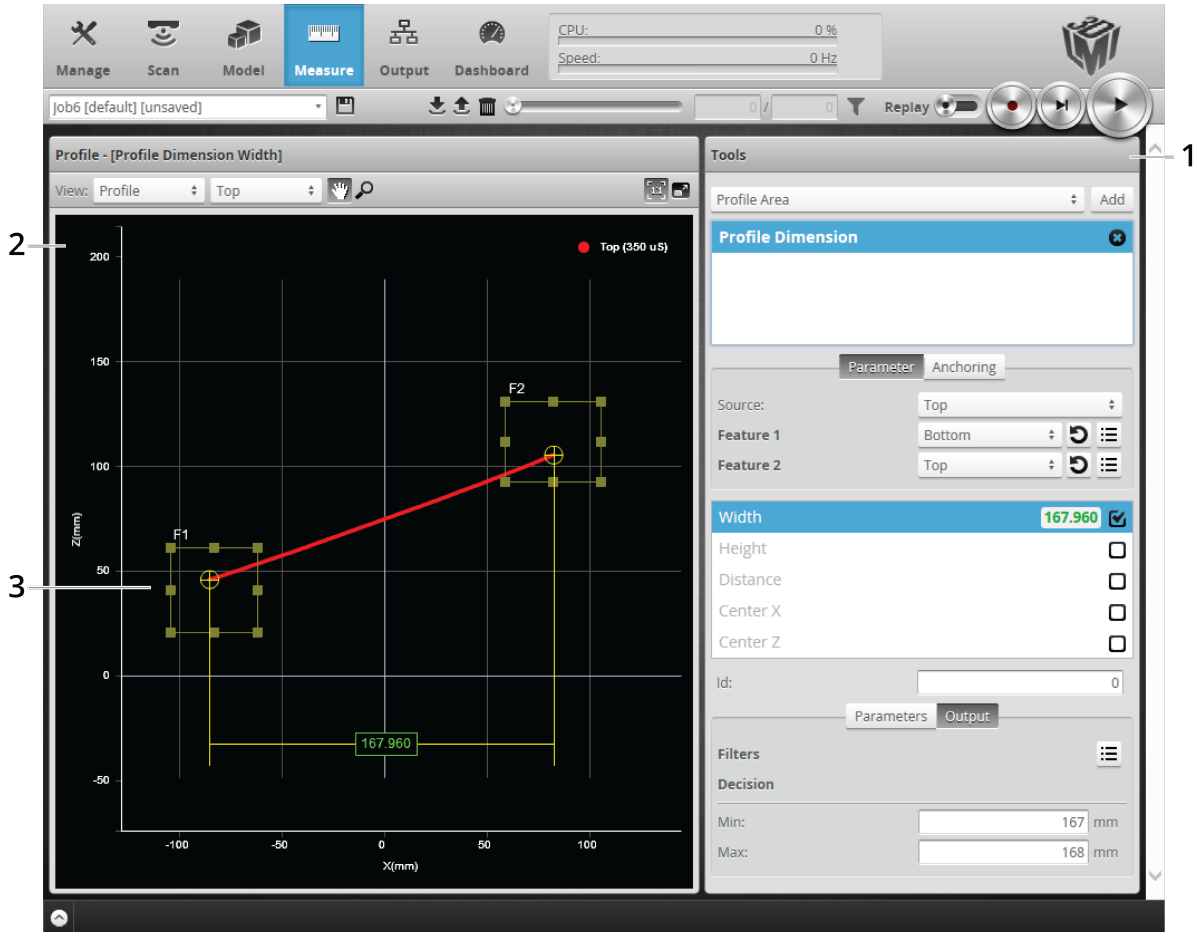

	Element	Description
1	Tools panel	Used to add, manage, and configure tools and measurements (see on the next page) and to choose anchors (see on page 154).
2	Data Viewer	Displays profile or surface data, sets up tools, and displays result calipers related to the selected measurement. Parts are displayed using a height map, which is a top-down view of the XY plane, where color represents height. See *Data Viewer* on the next page.

	Element	Description
3	Feature Area	Configurable region of interest from which feature points are detected. These feature points are used to calculate the measurements. The number of feature areas displayed depends on which measurement tool is currently selected.

Data Viewer

Regions, such as active area or measurement regions, can be graphically set up using the data viewer.

When the **Measure** page is active, the data viewer can be used to graphically configure measurement regions. Measurement regions can also be configured manually in measurements by entering values into the provided fields (see on page 151).

For instructions on how to set up measurement regions graphically, see on page 125.

Tools Panel


The **Tools** panel lets you add, configure, and manage tools. Tools contain related measurements. For example, the Dimension tool provides Height, Width, and other measurements.

Some settings apply to tools, and therefore to all measurements, whereas some settings apply to specific measurements. See *Profile Measurement* on page 159 and *Surface Measurement on page 186* for information on the measurement tools and their settings.

> Tool names in the user interface include the scan mode, but not in the manual. So for example, you will see "Profile Area" or "Surface Bounding Box" in the user interface, but simply "Area" or "Bounding Box" in the manual.

Adding and Configuring a Tool

Adding a tool adds all of the tool's measurements to the **Tools** panel. You can then enable and configure the measurments selectively.

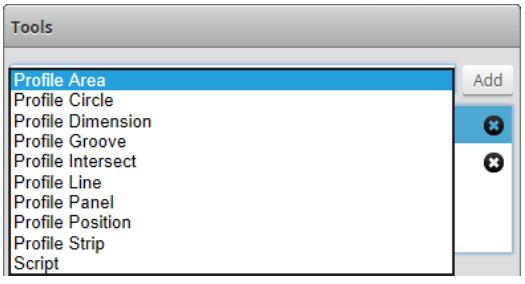

To add and configure a tool:

1. Go to the **Scan** page by clicking on the **Scan** icon.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, tools will not be available in the **Measure** panel.
3. Go to the **Measure** page by clicking on the **Measure** icon.

4. In the Tools panel, select the tool you want to add from the drop-down list of tools.
5. Click on the **Add** button in the Tools panel.
   The tool and its available measurements are added to the tool list. The tool parameters are listed in the area below the tool list.
6. (Optional) If you are running a dual-sensor system, choose the sensor that will provide data to the measurement tool in **Source**.
   For more information on sources, see *Source* below.
7. (Optional) If the measurement is a profile measurement running on a section, and you have created more than one section, choose the section that will provide data to the measurement in **Stream**.
   For more information on streams, see *Streams (Sections)* on the next page.
8. Select a measurement at the bottom of the tool panel.
9. Set any tool- or measurement-specific settings.
   For tool- and measurement-specific settings, see the topics for the individual profile or surface tools.
10. Set the **Min** and **Max** decision values.
    For more information on decisions, see *Decisions* on page 152.
11. (Optional) Set one or more filters.
    For more information on filters, see *Filters* on page 153.
12. (Optional) Set up anchoring.
    For more information on anchoring, see *Measurement Anchoring* on page 154.

> If the drop-down list contains only the Distance measurement, the sensor is not equipped with profile tools. The Distance measurement is provided in all sensors to demonstrate the measurement capability.

Source

For dual-sensor systems, you must specify a profile source for measurement tools. The source determines which sensor provides data for the measurement. The same source is used for all of a tool's measurements.

Depending on the layout you have selected, the **Source** drop-down will display one of the following (or a combination). For more information on layouts, see *System Layout* on page 66.

> The **Source** setting applies to all of a tool's measurements.

Setting	Description
Top	Refers to the Main sensor in a standalone or dual-sensor system, the Main sensor in Opposite layout, or the combined data from both Main and Buddy sensors.
Bottom	Refers to a Buddy sensor in a dual-sensor system position in Opposite layout.
Top Left	Refers to a Main sensor in Wide layout or to a Buddy sensor in Reverse layout in a dual-sensor system position.
Top Right	Refers to a Buddy sensor in Wide layout or to a Main sensor in Reverse layout in a dual-sensor system position.

To select the source:

1. Go to the **Measure** page by clicking on the **Measure** icon.

   > The scan mode must be set to the type of measurement you need to configure. Otherwise, the wrong tools, or no tools, will be listed on the **Measure** page.

2. In the **Tools** panel, click on a tool in the tool list.
3. If it is not already selected, click on the **Parameter** tab in the tool configuration area.
4. Select the profile source in the **Source** drop-down list.

Streams (Sections)

If you create more than one section on a surface and then add a profile measurement, you must choose which section profile that measurement uses using the **Stream** setting in the measurement.

> The **Stream** setting applies to all of a tool's measurements.

To choose a stream:

1. Go to the **Measure** page by clicking on the **Measure** icon.

   > The scan mode must be set to the type of measurement you need to configure. Otherwise, the wrong tools, or no tools, will be listed on the **Measure** page.

2. In the **Tools** panel, click on a tool in the tool list.
3. In the measurement list, select a measurement.
   To select a measurement, it must be enabled. See *Enabling and Disabling Measurements* on page 156 for instructions on how to enable a measurement.
4. If it is not already selected, click on the **Parameter** tab in the tool configuration area.
5. Select the section in the **Stream** drop-down list.

Regions

Region parameters are used by many tools to limit the region in which a measurement will occur or to help in the identification of a feature (see on page 159), a fit line (see on page 161), or left or right side of the Panel measurements (Gap and Flush; see *Panel* on page 178).

All tools provide region settings under the **Parameters** tab.

> The **Region** settings apply to all of a tool's measurements.

See the individual tools for details on using this parameter with each tool.



This parameter is also referred to as a measurement region.

> In 2D mode, the tool region defaults to the center of the current data view, not the global field of view. In 3D mode, the region defaults to the global field of view.

To configure regions:

1. Go to the **Measure** page by clicking on the **Measure** icon.


   > The scan mode must be set to the type of measurement you need to configure. Otherwise, the wrong tools, or no tools, will be listed on the **Measure** page.

2. In the **Tools** panel, click on a tool in the tool list.
3. Expand the region section by clicking on the expand button .
   Some region settings are found within other settings in this area.
4. Configure the region using the fields or graphically using the mouse in the data viewer.


Decisions

Results from a measurement can be compared against minimum and maximum thresholds to generate *pass* / *fail* decisions. The decision state is *pass* if a measurement value is between the minimum and maximum threshold. In the data viewer and next to the measurement, these values are displayed in green. Otherwise, the decision state is *fail*. In the user interface, these values are displayed in red.

All measurements provide decision settings under the **Output** tab.

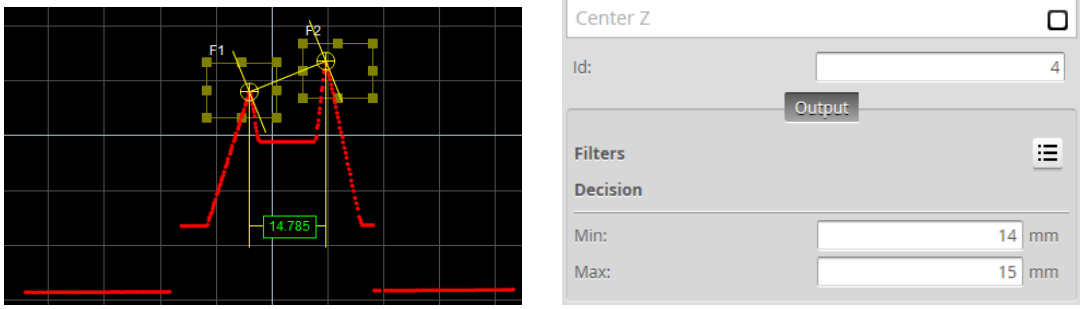

Value (14.786) within decision thresholds (Min: 14, Max: 15). Decision: Pass

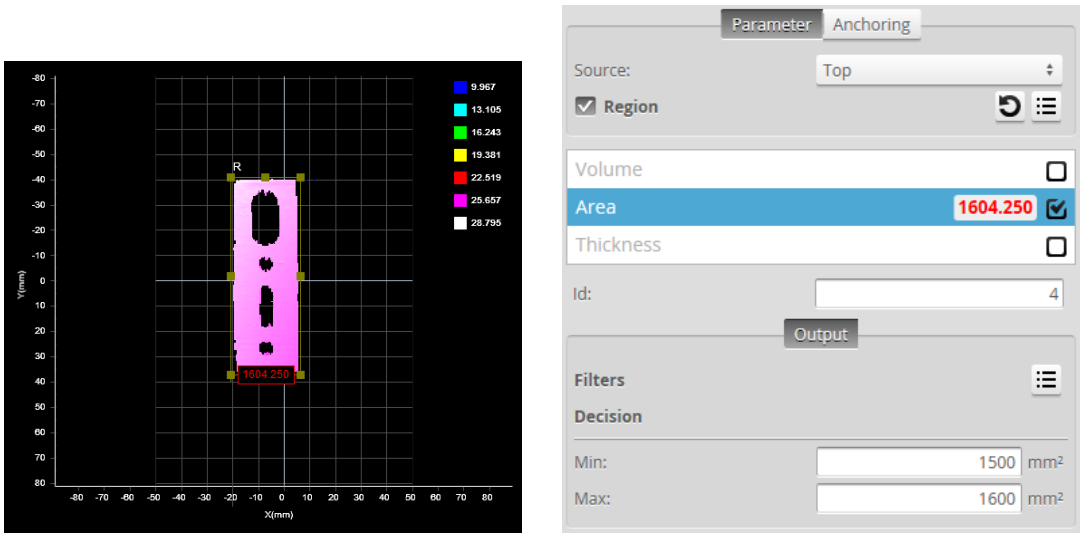

Value (1604.250) outside decision thresholds (Min: 1500, Max: 1600). Decision: Fail

Along with measurement values, decisions can be sent to external programs and devices. In particular, decisions are often used with digital outputs to trigger an external event in response to a measurement. See *Output* on page 229 for more information on transmitting values and decisions.

To configure decisions:

1. Go to the **Measure** page by clicking on the **Measure** icon.

   > The scan mode must be set to the type of measurement you need to configure. Otherwise, the wrong tools, or no tools, will be listed on the **Measure** page.

2. In the **Tools** panel, click on a tool in the tool list.
3. In the measurement list, select a measurement.
   To select a measurement, it must be enabled. See *Enabling and Disabling Measurements* on page 156 for instructions on how to enable a measurement.
4. Click on the **Output** tab.
   For some measurements, only the **Output** tab is displayed.
5. Enter values in the **Min** and **Max** fields.

Filters

Filters can be applied to measurement values before they are output from the Gocator sensors.

All measurements provide filter settings under the **Output** tab.

Filter	Description
Scale and Offset	The Scale and Offset settings are applied to the measurement value according to the following formula:

Filter	Description
	Scale * Value + Offset **Scale** and **Offset** can be used to transform the output without the need to write a script. For example, to convert the measurement value from millimeters to thousands of an inch, set **Scale** to 39.37. To convert from radius to diameter, set **Scale** to 2.
Hold Last Valid	Holds the last valid value when the measurement is invalid. Measurement is invalid if there is no valid value.
Smoothing	Applies moving window averaging to reduce random noise in a measurement output. The averaging window is configured in number of frames. If **Hold Last Valid** is enabled, smoothing uses the output of the **Hold Last Valid** filter.



To configure the filters:

1. Go to the **Measure** page by clicking on the **Measure** icon.


   > The scan mode must be set to the type of measurement you need to configure. Otherwise, the wrong tools, or no tools, will be listed on the **Measure** page.


2. In the **Tools** panel, click on a tool in the tool list.
3. In the measurement list, select a measurement.
   To select a measurement, it must be enabled. See *Enabling and Disabling Measurements* on page 156 for instructions on how to enable a measurement.
4. Click on the **Output** tab.
   For some measurements, only the **Output** tab is displayed.
5. Expand the **Filters** panel by clicking on the panel header or the ⊕ button.
6. Configure the filters.
   Refer to the table above for a list of the filters.

Measurement Anchoring

Measurement anchoring is used to track the movement of parts within the field of view of the sensor, compensating for variations in the height and position of parts. The movement is calculated as an offset from the position of a measured feature, where the offset is then used to correct the positions of

measurement regions of other measurement tools. This ensures that the regions used to measure features are correctly positioned for every part.

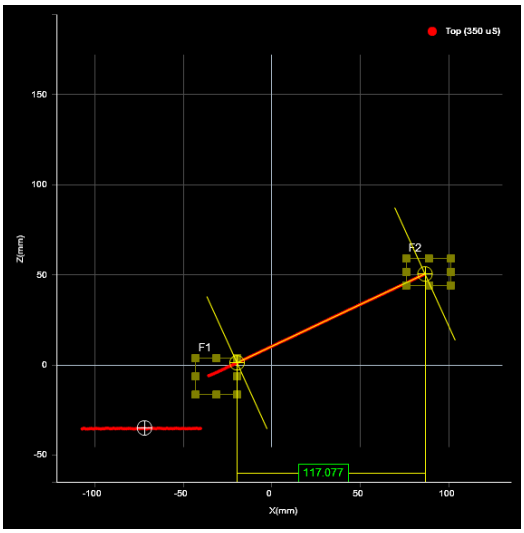

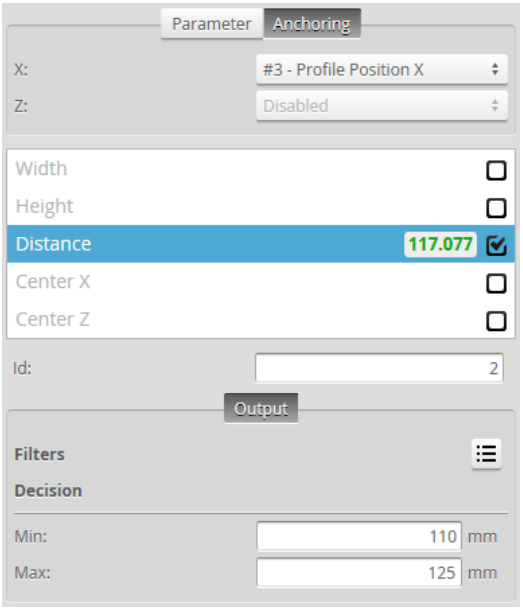

Anchoring is not required in order to use measurement tools. This is an optional feature that helps make measurements more robust when the position and the height of the target varies from target to target.

Any X, Y, or Z measurement can be used as an anchor for a tool.

Several anchors can be created to run in parallel. For example, you could anchor some measurements relative to the left edge of a target at the same time as some other measurements are anchored relative to the right edge of a target.

To anchor a profile or surface tool to a measurement:

1. Put a representative target object in the field of view.
   The target should be similar to the objects that will be measured later.

   In Profile mode

   a. Use the **Start** or **Snapshot** button to view live profile data to help position the target.

   In Surface mode

   a. Select a Surface Generation type (see on page 107) and adjust Part Detection settings (see on page 111) if applicable.

   b. Start the sensor, scan the target and then stop the sensor.

2. On the **Measure** page, add a suitable tool to act as an anchor.
   A suitable tool is one that returns an X, Y, or Z position as a measurement value.

   > The scan mode must be set to the type of measurement you need to configure. Otherwise, the wrong tools, or no tools, will be listed on the **Measure** page.

3. Adjust the anchor tool's settings and measurement region, and choose a feature type (if applicable).

You can adjust the measurement region graphically in the data viewer or manually by expanding the **Regions** area.
The position and size of the anchor tool's measurement regions define the zone within which movement will be tracked.
See *Feature Points* on page 159 for more information on feature types.


4. Add the tool that will be anchored.
   Any tool can be anchored.
5. Adjust the tool and measurement settings, as well as the measurement regions.
6. Click on the tool's **Anchoring** tab.
7. Choose an anchor from the X, Y, or Z drop-down box.
   When you choose an anchor, a white "bulls-eye" indicator shows the position of the anchor in the data viewer.
   If the sensor is running, the anchored tool's measurement regions are shown in white to indicate the regions are locked to the anchor. The measurement regions of anchored tools cannot be adjusted.
   The anchored tool's measurement regions are now tracked and will move with the target's position under the sensor, as long as the anchor measurement produces a valid measurement value. If the anchor measurement is invalid, for example, if there is no target under the sensor, the anchored tool will not show the measurement regions at all and an "Invalid-Anchor" message will be displayed in the tool panel.

To remove an anchor from a tool:

1. Click on the anchored tool's Anchoring tab.
   Select **Disabled** in the X, Y, or Z drop-down.

Enabling and Disabling Measurements

All of the measurements available in a tool are listed in the measurement list in the **Tools** panel after a tool has been added. To configure a measurement, you must enable it.

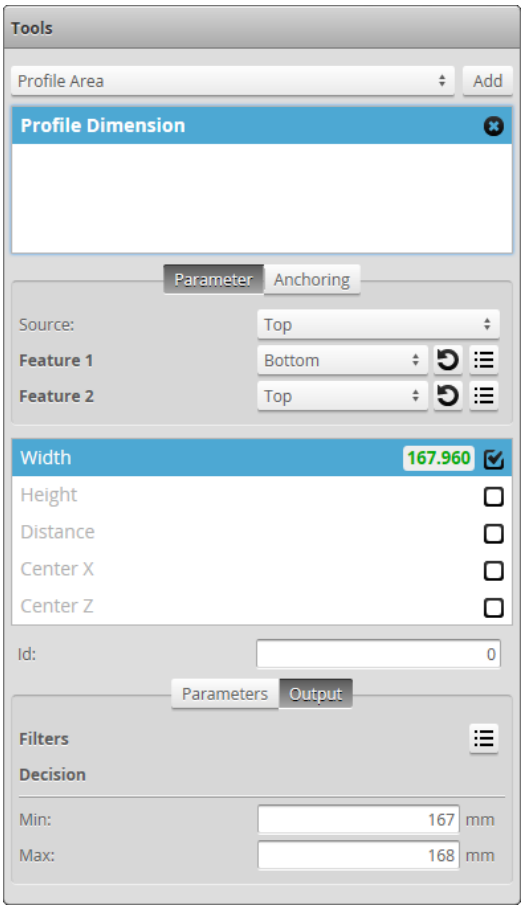

To enable a measurement:

1. Go to the **Scan** page by clicking on the **Scan** icon.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, tools will not be available in the **Measure** panel.
3. Go to the **Measure** page by clicking on the **Measure** icon.
4. In the measurements list, check the box of the measurement you want to enable.
   The measurement will be enabled and selected. The **Output** tab, which contains output settings will be displayed below the measurements list. For some measurements, a **Parameters** tab, which contains measurement-specific parameters, will also be displayed.

To disable a measurement:

1. Go to the **Scan** page by clicking on the **Scan** icon.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
3. Go to the **Measure** page by clicking on the **Measure** icon.
4. In the measurement list, uncheck the box of the measurement you want to disable.
   The measurement will be disabled and the **Output** tab (and the **Parameters** tab if it was available) will be hidden.

Editing a Tool or Measurement Name

You can change the names of tools you add in Gocator. You can also change the names of their measurements. This allows multiple instances of tools and measurements of the same type to be more easily distinguished in the Gocator web interface. The measurement name is also referenced by the Script tool.

To change a tool or measurement name:

1. Go to the **Scan** page by clicking on the **Scan** icon.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, tools will not be available in the **Measure** panel.
3. Go to the **Measure** page by clicking on the **Measure** icon.
4. Do one of the following:
   - **Tool**: In the tool list, double-click the tool name you want to change
   - **Measurement**: In a tool's measurement list, double-click the measurement name you want to change.
5. Type a new name.
6. Press the Tab or Enter key, or click outside the field.
   The name will be changed.

Changing a Measurement ID

The measurement ID is used to uniquely identify a measurement in the Gocator protocol or in the SDK. The value **must** be unique among all measurements.

To edit a measurement ID:

1. Go to the **Scan** page by clicking on the **Scan** icon.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If one of these modes is not selected, tools will not be available in the **Measure** panel.
3. Go to the **Measure** page by clicking on the **Measure** icon.
4. In the measurement list, select a measurement.
   To select a measurement, it must be enabled. See *Enabling and Disabling Measurements* on page 156 for instructions on how to enable a measurement.
5. Click in the ID field.
6. Type a new ID number.
   The value must be unique among all measurements.
7. Press the Tab or Enter key, or click outside the ID field.
   The measurement ID will be changed.

Removing a Tool

Removing a tool removes all of its associated measurements.

To remove a tool:

1. Go to the **Scan** page by clicking on the **Scan** icon.
2. Choose Profile or Surface mode in the **Scan Mode** panel.
   If is not selected, tools will not be available in the **Measure** panel.
3. Go to the **Measure** page by clicking on the **Measure** icon.
4. In the tool list, click on the button of the tool you want to delete.
   The tool will be removed from the tool list.

Profile Measurement

This section describes the profile measurement tools available in Gocator sensors.

The following tools are available when **Uniform Spacing** is disabled:

- Bridge Value
- Dimension
- Position
- Script



For more information on the **Uniform Spacing** setting and resampled data, see *Uniform Spacing (Data Resampling)* on page 50.









Profile measurement tools can be used on sections. For more information on sections, see *Sections* on page 142.






Feature Points

Most measurement detect and compare *feature points* or *lines* found within laser profile data. Measurement *values* are compared against minimum and maximum thresholds to yield *decisions*.

The following types of points can be identified.


Point Type	Examples
Max Z Finds the point with the maximum Z value in the region of interest.	
Min Z Finds the point with the minimum Z value in the region of interest.	

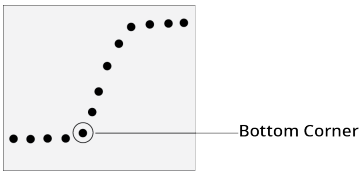Point Type	Examples
Min X Finds the point with the minimum X value in the region of interest.	
Max X Finds the point with the maximum X value in the region of interest.	
Average Determines the average location of points in the region of interest.	
Corner Finds a dominant corner in the region of interest, where corner is defined as a change in profile slope.	
Top Corner Finds the top-most corner in the region of interest, where corner is defined as a change in profile shape.	
Bottom Corner Finds the bottom-most corner in the region of interest, where corner is defined as a change in profile shape.	
Left Corner Finds the left-most corner in the region of interest, where corner is defined as a change in profile shape.	
Right Corner Finds the right-most corner in the region of interest, where corner is defined as a change in profile shape.	

Point Type	Examples
Rising Edge Finds a rising edge in the region of interest.	
Falling Edge Finds a falling edge in the region of interest.	
Any Edge Finds a rising or falling edge in the region of interest.	 
Median Determines the median location of points in the region of interest.	

Fit Lines

Some measurements involve estimating lines in order to measure angles or intersection points. A fit line can be calculated using data from either one or two fit areas.

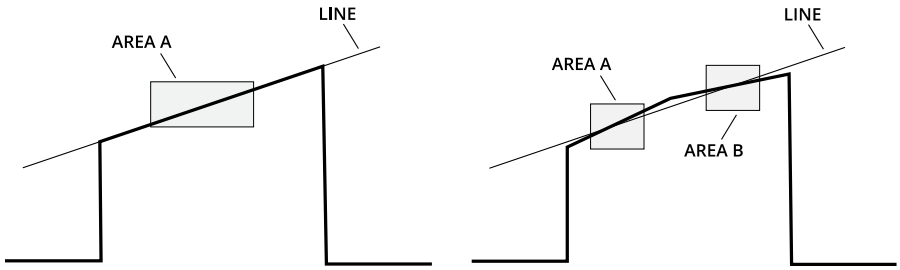


A line can be defined using one or two areas. Two areas can be used to bypass discontinuity in a line segment.


Measurement Tools

Area

The Area tool determines the cross-sectional area within a region. The measurement value can be compared with minimum and maximum constraints to yield a decision.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.



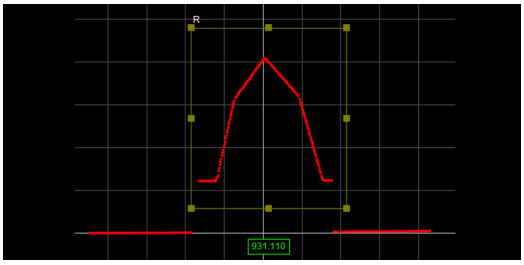


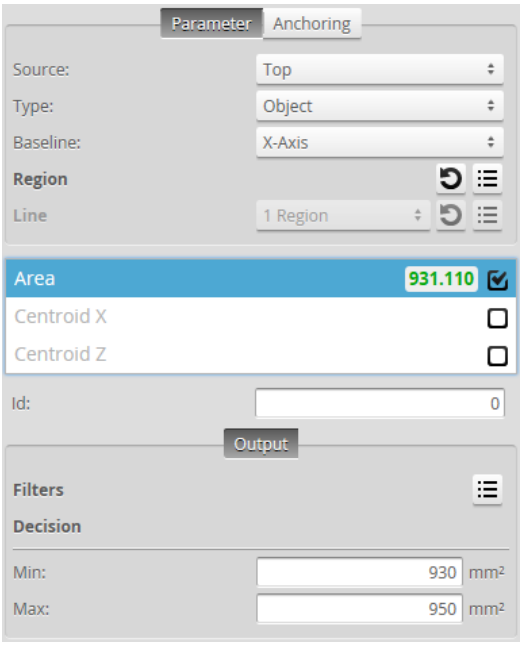

Areas are positive in regions where the profile is above the X axis. In contrast, areas are negative in regions where the profile is below the X axis.

Measurements

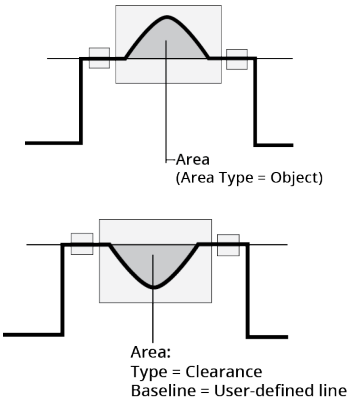Measurement	Illustration
Area Measures the cross-sectional area within a region that is above or below a fitted baseline.	

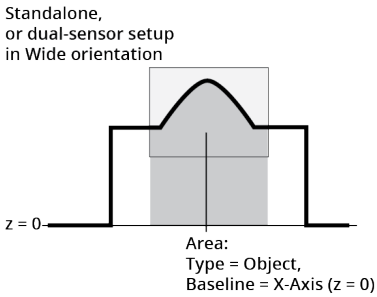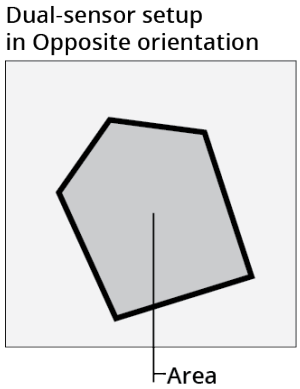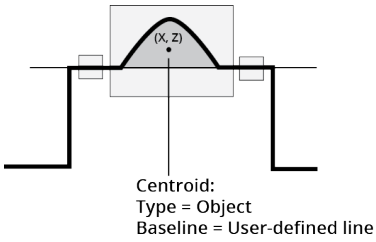Measurement	Illustration
	 
Centroid X Determines the X position of the centroid of the area.	
Centroid Z Determines the Z position of the centroid of the area.	

Parameters

Parameter	Description
Type	**Object** area type is for convex shapes above the baseline. Regions below the baseline are ignored. **Clearance** area type is for concave shapes below the baseline. Regions above the baseline are ignored.
Baseline	Baseline is the fit line that represents the line above which (Object clearance type) or below which (Clearance area type) the cross-sectional area is measured. When this parameter is set to **Line**, you must define a line in the Line parameter. See *Fit Lines* on page 161 for more information on fit lines. When this parameter is set to **X-Axis**, the baseline is set to z = 0.
Line	When Baseline is set to **Line**, you must set this parameter.

Parameter	Description
	See *Fit Lines* on page 161 for more information on fit lines.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Filters	See *Filters* on page 153.

Bounding Box


The Bounding Box tool provides measurements related to the smallest box that contains the profile (for example, X position, Z position, width, etc.).


The measurement value can be compared with minimum and maximum constraints to yield a decision.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.




The bounding box provides the absolute position from which the Position centroids tools are referenced.

When you use measurement tools on parts or sections, the coordinates returned are relative to the part or section. You can use the values returned by the Bounding Box tool's "Global" (see below) measurements as an offset in a Gocator script to convert the positional (X, Y, or Z) measurements of other measurement tools to sensor or system coordinates (depending on whether the sensor is aligned). For more information on Gocator scripts, see See *Script Measurement* on page 224.

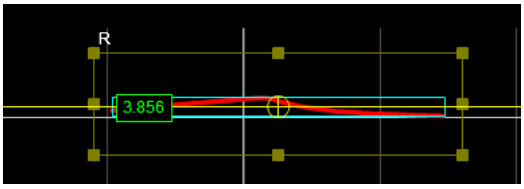

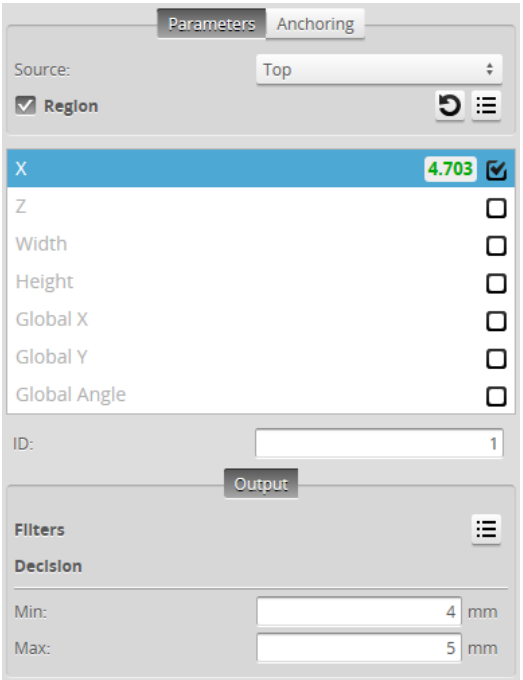

Measurement Panel

Measurement	Illustration
X Determines the X position of the center of the bounding box that contains the profile. The value returned is relative to the profile.	
Z Determines the Z position of the center of the bounding box that contains the profile. The value returned is relative to the profile.	
Width Determines the width of the bounding box that contains the profile. The width reports the dimension of the box in the direction of the minor axis.	
Height Determines the height (thickness) of the bounding box that contains the profile.	
Global X* Determines the X position of the center of the bounding box that contains the profile relative to the surface from which the profile is extracted.	
Global Y* Determines the Y position of the center of the bounding box that contains the profile relative to the surface from which the profile is extracted.	
Global Angle* Determines the angle around Z of the section used to create the profile, relative to the surface from which it is extracted, where a line parallel to the X axis is 0 degrees. Angles of sections pointing to the bottom of the data viewer are positive. Angles of sections pointing to the top of the data viewer are negative.	

*The Global X, Global Y, and Global Angle measurements are intended to be used with profiles extracted from a surface using a section.

When used with profiles not generated from a section, the Global X measurement returns the same value as the X measurement, and the Global Y and Global Angle measurements return 0.000.

Parameters


Parameter	Description
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Bridge Value

The Bridge Value tool lets you calculate the "bridge value" and angle of a scanned surface. A bridge value is a single, processed range that is basically a filtered average of a laser line profile, representing a "roughness calculation." A bridge value is typically used to measure road roughness.

> The Bridge value tool is *only* available when **Uniform Spacing** (in the **Scan Mode** panel on the **Scan** page) is unchecked, as the tool only works with unresampled data. For more information, see *Uniform Spacing (Data Resampling)* on page 50.


The Bridge Value tool measurements use a histogram of the ranges that make up the profile, in which the ranges are ordered from lowest to highest. The **Window** and **Skip** parameters together determine what segment of the heights in the histogram is used to calculate the bridge value. The following diagram illustrates what points of the histogram would be included for calculating the bridge value where **Window** is roughly 50% and **Skip** is roughly 15% of the histogram.

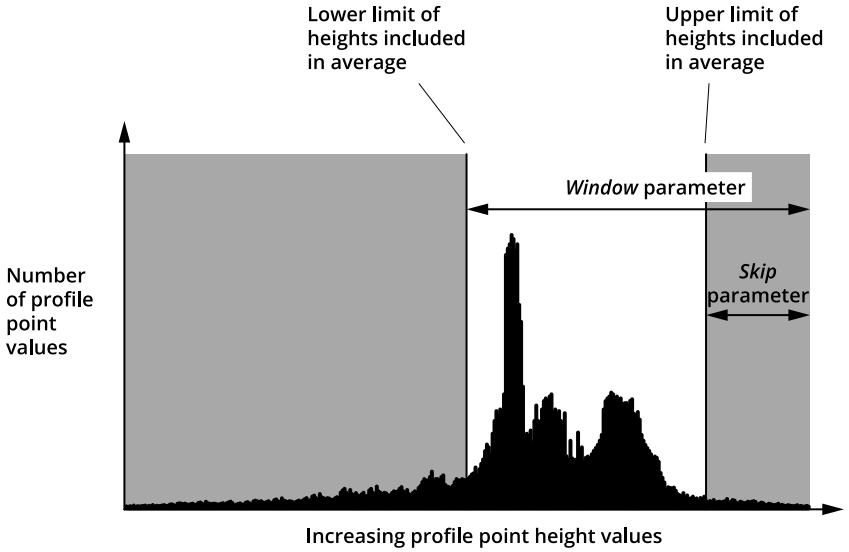


Profile point heights in the white area are included in the calculation of the average. Profile point heights in the grey area are excluded. By adjusting the **Window** and **Skip** parameters, you can choose profile point heights to remove unwanted features. In road roughness applications, you could exclude road features, such as rocks, cracks, tining valleys, and so on, to get an accurate representation of the tire-to-road interface. For more information on parameters, see the *Parameters* table below.

The measurement value can be compared with minimum and maximum constraints to yield a decision.



See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

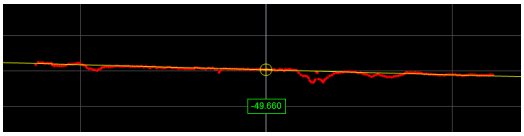

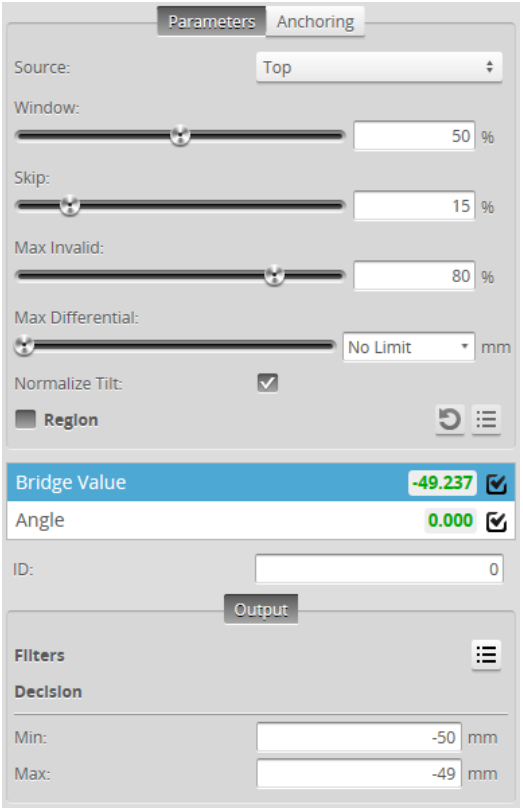

Measurement Panel

Measurements

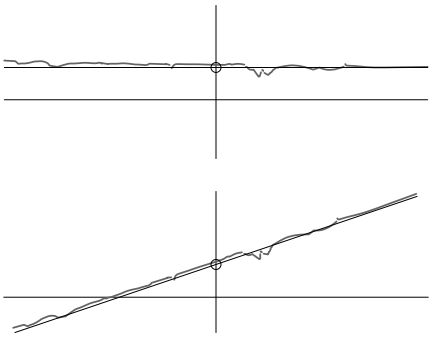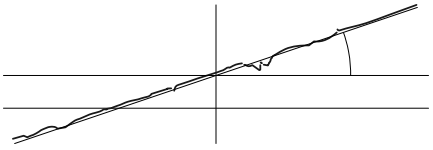Measurement	Illustration
Bridge Value Determines the bridge value of the profile.	
Angle Determines the angle of the line fitted to the profile. When Normalize Tilt is unchecked, the measurement always returns 0.	

Parameters


Parameter	Description
Window	A percentage of the profile point heights in the histogram,


Parameter	Description
	starting from the highest point, to include in the average. For example, a setting of 50% would include the highest 50% of the heights. The **Skip** parameter then determines the actual portion of the profile point heights used to calculate the average. The **Window** setting in effect sets the lower limit of the portion of profile points in the histogram to be used in the average.
Skip	A percentage of the profile point heights in the histogram, starting from the highest points, to exclude from the average. The percentage represents the portion of the entire profile, not the portion defined by **Window**. The **Skip** setting basically sets the upper limit of the portion of profile points in the histogram to be used in the average. If **Skip** is greater than **Window**, an invalid value is returned.
Max Invalid	The maximum percentage of invalid points allowed before an invalid result is returned.
Max Differential	The maximum difference between the maximum and minimum histogram values before an invalid measurement value is produced.
Normalize Tilt	Fits a line to the profile and shears the points in the Z direction by the angle between the fitted line and the X axis. The **Window** and **Skip** settings are applied to the histogram of the transformed data. Useful for surfaces that are tilted.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Circle



The Circle tool provides measurements that find the best-fitted circle to the live profile and measure various characteristics of the circle. The measurement value can be compared with minimum and maximum constraints to yield a decision.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

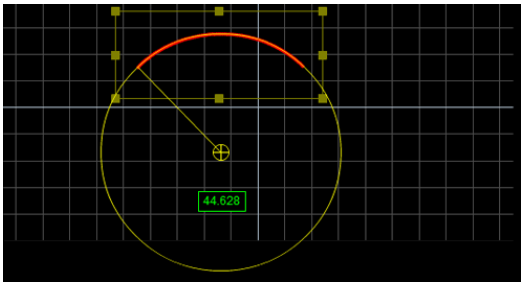

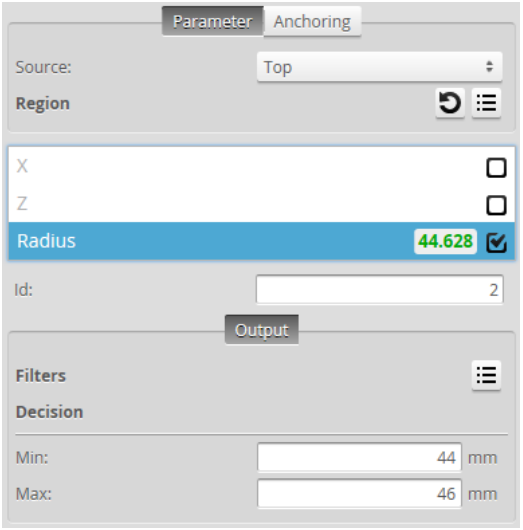

Measurements

Measurement	Illustration
Radius Measures the radius of the circle.	
X Finds the circle center position in the X axis.	
Z Finds the circle center position in the Z axis.	

Parameters


Parameter	Description
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.


Dimension

The Dimension tool provides Width, Height, Distance, Center X, and Center Z measurements.

> The Dimension tool can be used whether **Uniform Spacing** is enabled or not, that is, with either resampled or unresampled data. For more information on the **Uniform Spacing** setting and resampled data, see *Uniform Spacing (Data Resampling)* on page 50.




See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.


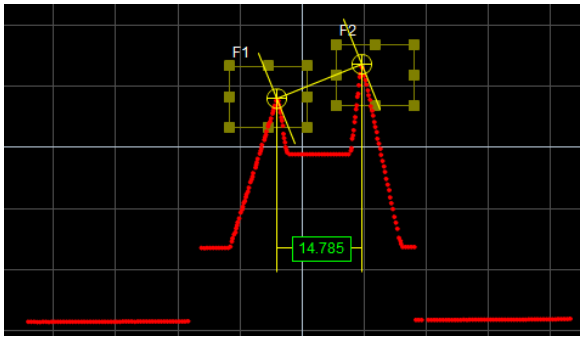


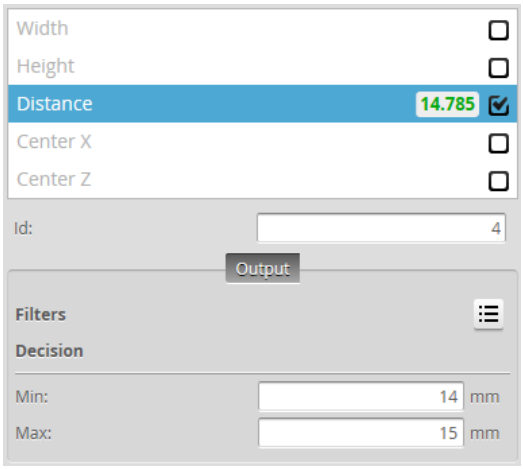

The tool's measurements require two feature points. See *Feature Points* on page 159 for information on point types and how to configure them.

Measurements

Measurement	Illustration
Width Determines the difference along the X axis between two feature points. The difference can be calculated as an absolute or signed result. The difference is calculated by: $Width = Feature\ 2_{X\ position} - Feature\ 1_{X\ position}$	
Height Determines the difference along the Z axis between two feature points. The difference can be expressed as an absolute or signed result. The difference is calculated by: $Height = Feature\ 2_{Z\ position} - Feature\ 1_{Z\ position}$	
Distance Determines the direct, Euclidean distance between two feature points.	

Measurement	Illustration
Center X Finds the average location of two features and measures the X axis position of the average location	
Center Z Finds the average location of two features and measures the Z axis position of the average location.	


Parameters


Parameter	Description
Absolute *(Width and Height measurements only)*	Determines if the result will be expressed as an absolute or a signed value.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Groove

The Groove tool provides measurements of V-shape, U-shape, or open-shape grooves. The measurement value can be compared with minimum and maximum constraints to yield a decision.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

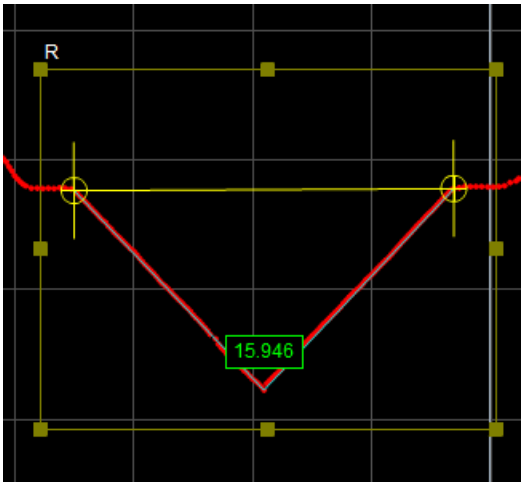

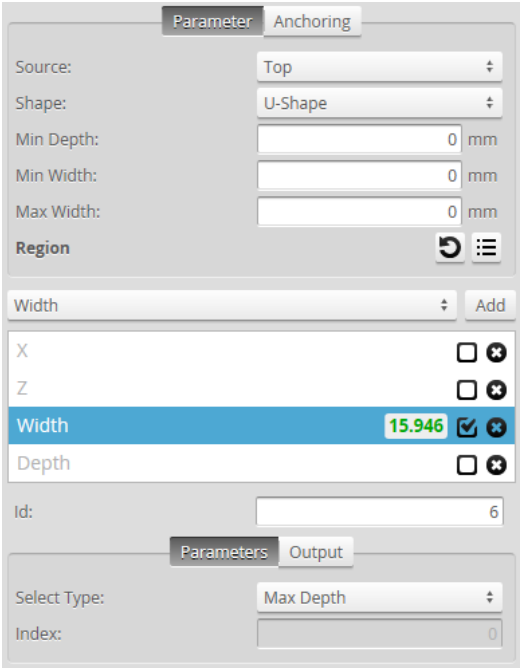







The Groove tool uses a complex feature-locating algorithm to find a groove and then return measurements. See "Groove Algorithm" in the *Gocator Measurement Tool Technical Manual* for a detailed explanation of the algorithm. The behavior of the algorithm can be adjusted by changing the parameters in the measurement panel.

The Groove tool lets you add multiple measurements of the same type to receive measurements and set decisions for multiple grooves. Multiple measurements are added by using the drop-down above the list of measurements and clicking on the **Add** button.

For example, if a target has three grooves, by adding two measurements, choosing **Index From The Left** in the **Select Type** setting of those measurements, and providing values of 0 and 2 in the **Index** setting of the measurements, respectively, the Groove tool will return measurements and decisions for the first and third grooves.


Measurements


Measurement	Illustration
Width Measures the width of a groove.	

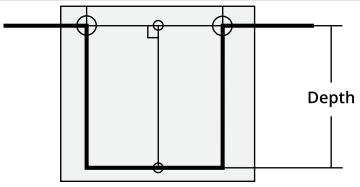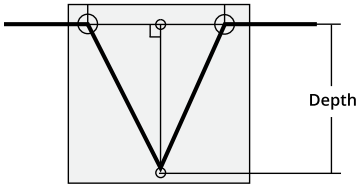Measurement	Illustration
	
Depth Measures the depth of a groove as the maximum perpendicular distance from a line connecting the edge points of the groove.	 
X Measures the X position of the bottom of a groove.	
Z Measures the Z position of the bottom of a groove.	

Parameters

Parameter	Description
Shape	Shape of the groove

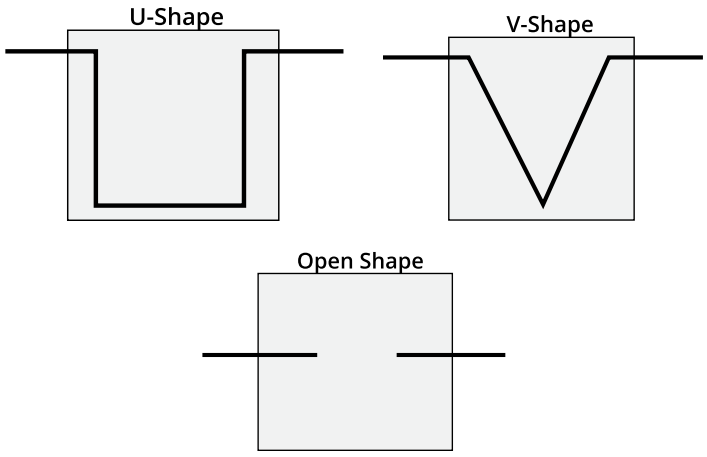Parameter	Description
	
Location *(Groove X and Groove Z measurements only)*	Specifies the location type to return Bottom - Groove bottom. For a U-shape and open-shape groove, the X position is at the centroid of the groove. For a V-shape groove, the X position is at the intersection of lines fitted to the left and right sides of the groove. See algorithm section below for more details. Left - Groove's left corner. Right - Groove's right corner.
Select Type	Specifies how a groove is selected when there are multiple grooves within the measurement area. Maximum Depth - Groove with maximum depth. Index from The Left - 0-based groove index, counting from left to right Index from the Right - 0-based groove index, counting from right to left.
Index	0-based groove index.
Minimum Depth	Minimum depth for a groove to be considered valid.
Minimum Width	Minimum width for a groove to be considered valid. The width is the distance between the groove corners.
Maximum Width	Maximum width of a groove to be considered valid. If set to 0, the maximum is set to the width of the measurement area.
Decision	See *Decisions* on page 152.
Region	The measurement region defines the region in which to search for the groove. For a stable measurement, the measurement region should be made large enough to cover some laser data on the left and right sides of the groove. See *Regions* on page 151.


Parameter	Description
	
Output	See *Filters* on page 153.


Intersect

The Intersect tool determines intersect points and angles. The measurement value can be compared with minimum and maximum constraints to yield a decision.




The Intersect tool's measurements require two fit lines, one of which is a reference line set to the X axis (z = 0), the Z axis (x = 0), or a user-defined line.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

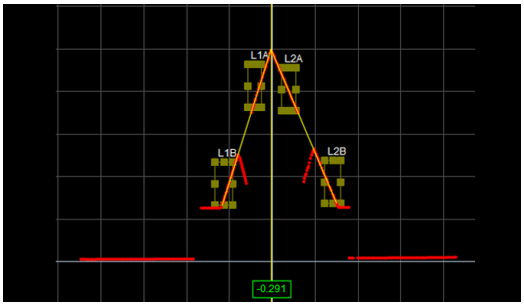

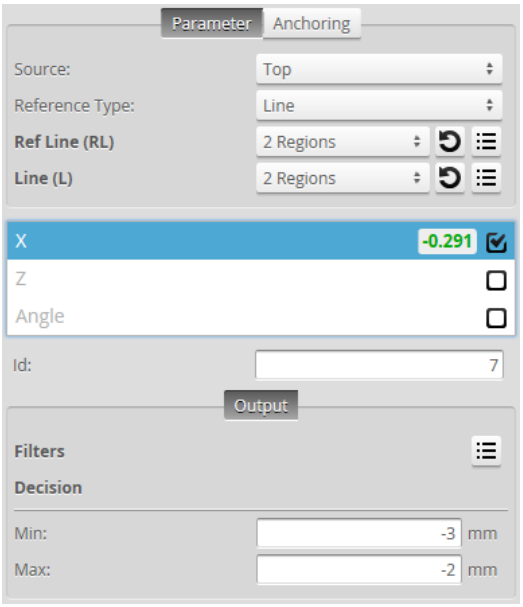

Measurements

Measurement	Illustration
X Finds the intersection between two fitted lines and measures the X axis position of the intersection point.	
Z Finds the intersection between two fitted lines and measures the Z axis position of the intersection point.	
Angle Finds the angle subtended by two fitted lines.	


Parameters


Parameter	Description
Reference Type	Determines the type of the reference line. **X-Axis**: The reference line is set to the X axis. **Z-Axis**: The reference line is set to the Z axis **Line**: The reference line is defined manually using the **Ref Line** parameter. One or two regions can be used to define the line.
Ref Line	Used to define the reference line when **Line** is selected in the **Reference Type** parameter.
Line	One or two fit areas can be used for each fit line. See *Fit Lines* on page 161 for more information.
Angle Range *(Angle measurement only)*	Determines the angle range. The options are: **-90 – 90** **0 – 180**
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Line





The Line tool fits a line to the live profile and measures the deviations from the best-fitted line. The measurement value can be compared with minimum and maximum constraints to yield a decision.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

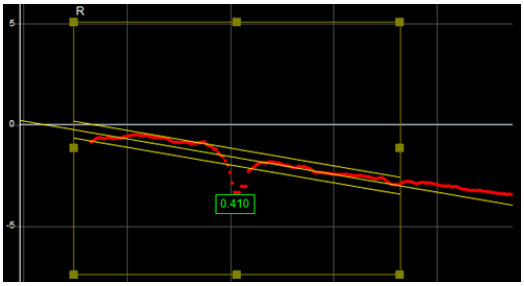

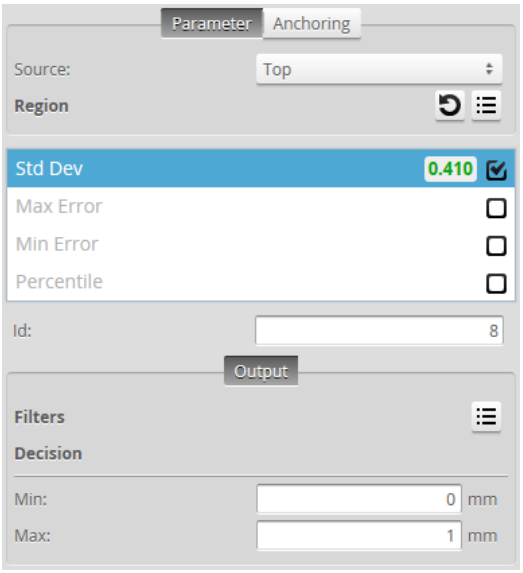

Measurements

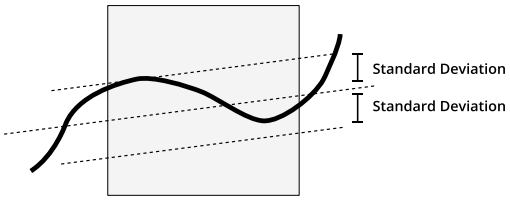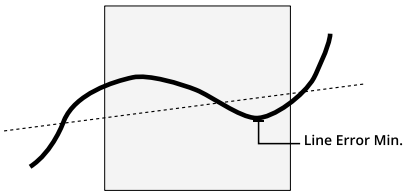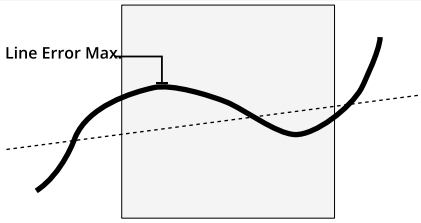Measurement	Illustration
Std Dev Finds the best-fitted line and measures the standard deviation of the laser points from the line.	
Min Error Finds the best-fitted line and measures the minimum error from the line (the maximum distance below the line).	
Max Error Finds the best-fitted line and measures the maximum error from the line (the maximum distance above the line).	
Percentile Finds the best-fitted line and measures the range (in Z) that covers a percentage of points around the line.	


Parameters


Parameter	Description
Percent *(Percentile measurement only)*	The specified percentage of points around the best-fitted line.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Panel

The Panel tool provides Gap and Flush measurements. The measurement value can be compared with minimum and maximum constraints to yield a decision.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.


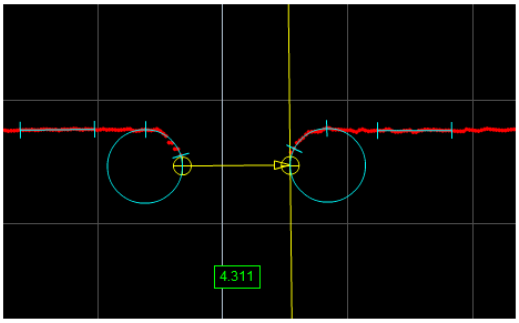


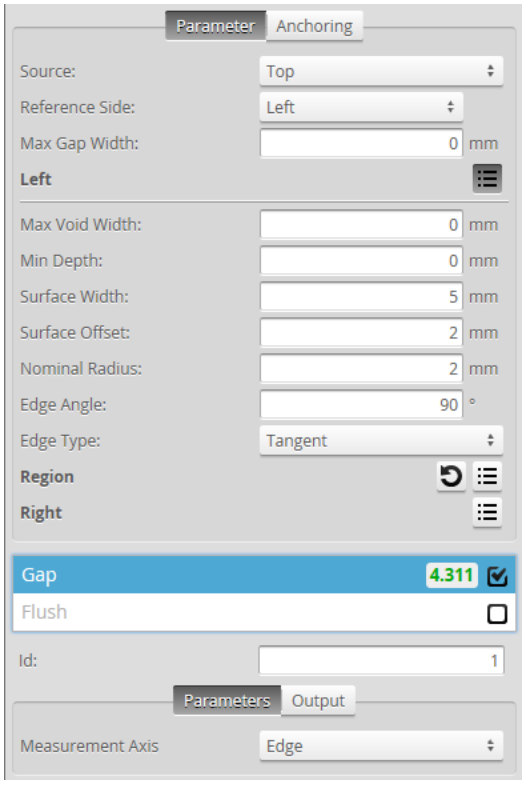

The Panel tool uses a complex feature-locating algorithm to find the gap or calculate flushness and return measurements. The behavior of the algorithm can be adjusted by changing the parameters in the measurement panel. See "Gap and Flush Algorithm" in the *Gocator Measurement Tool Technical Manual* for a detailed explanation of the algorithm.

> You must make sure that there are enough data points to define the edge (proper exposure, etc.). If not, the algorithm will not function.

Measurements

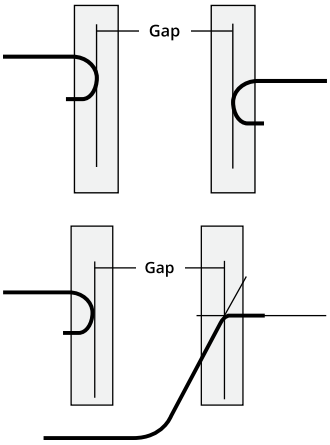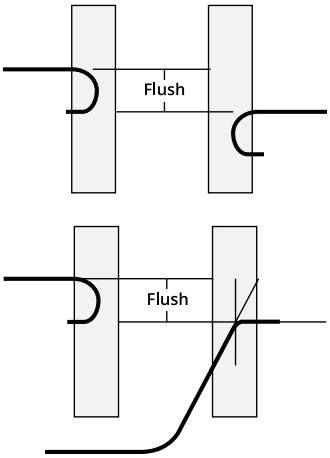Measurement	Illustration
Gap Measures the distance between two surfaces. The surface edges can be curved or sharp.	
Flush Measures the flushness between two surfaces. The surface edges can be curved or sharp.	


Parameters

Parameter	Description
Max Gap Width	The maximum width of the gap. Allows the tool to filter gaps greater than the expected width. This can be used to single out the correct gap when there are multiple gaps in the field of view.
Reference Side	Defines the side used to calculate the measurement axis (see below).
Measurement Axis *Gap measurement only*	Defines the direction that the gap is calculated, in relation to the reference side (see above). **Surface**: In the direction of the fitted surface line of the reference surface. **Edge**: In the direction perpendicular to the edge of the reference surface. **Distance**: The Cartesian distance between the two feature locations.
Absolute *Flush measurement only*	When enabled, returns an absolute value rather than a signed value.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Left/Right Side Parameters

Parameter	Description
Max Void Width	The maximum allowed width of missing data caused by occlusion or data dropout.
Minimum Depth	Defines the minimum depth before an opening could be considered to have a potential edge. The depth is the perpendicular distance from the fitted surface line.
Surface Width	The width of the surface area in which laser data is used to form the fitted surface line. This value should be as large as the surface allows.
Surface Offset	The distance between the edge region and the surface region. Setting a small value allows the edge within a tighter region to be detected. However, the measurement repeatability could be affected if the data from the edge are considered as part of the surface region (or vice versa). A rule of thumb is to set **Surface Offset** equal to **Nominal Radius**.
Nominal Radius	The radius of the curve edge that the tool uses to locate the edge region.
Edge Angle	A point on the best fit circle to be used to calculate the feature point. The selected point is on the circumference at the specified angle from the start of the edge region. The angle is measured from the axis perpendicular to the fitted surface line.
Edge Type	Defines the type of feature point to use for the edge (corner or tangent). A tangent edge point is the point selected based on the defined Edge Angle. A corner edge point is the intersect point between the fitted surface line and a edge line formed by interpolating the points at and after the tangent within the edge region.

The Data Viewer displays the gap measurement in real time. It also displays the results from the intermediate steps in the algorihtm.

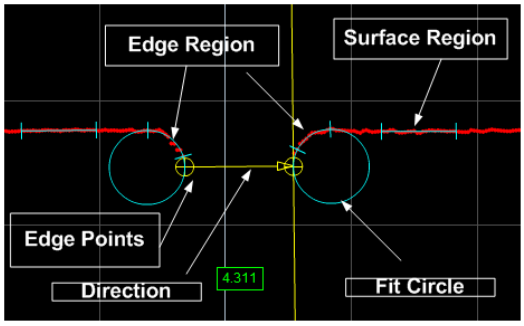



Position

The Position tool finds the X or Z axis position of a feature point. The feature type must be specified and is one of the following: Max Z, Min Z, Max X, Min X, Corner, Average (the mean X and Z of the data points), Rising Edge, Falling Edge, Any Edge, Top Corner, Bottom Corner, Left Corner, Right Corner, or Median (median X and Z of the data points). The measurement value can be compared with minimum and maximum constraints to yield a decision.



> The Position tool can be used whether **Uniform Spacing** is enabled or not, that is, with either resampled or unresampled data. For more information on the **Uniform Spacing** setting and resampled data, see *Uniform Spacing (Data Resampling)* on page 50.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

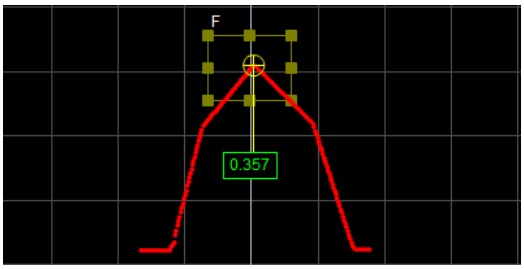

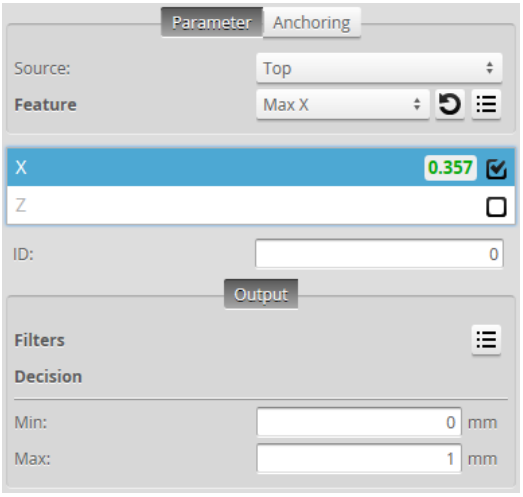

Measurements

Measurement	Illustration
X Finds the position of a feature on the X axis.	
Z Finds the position of a feature on the Z axis.	


Parameters


Parameter	Description
Feature Type	Choose Max Z, Min Z, Max X, Min X, Corner, Average, Rising Edge, Falling Edge, Any Edge, Top Corner, Bottom Corner, Left Corner, Right Corner, or Median.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Strip

The Strip tool measures the width of a strip. The measurement value can be compared with minimum and maximum constraints to yield a decision.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

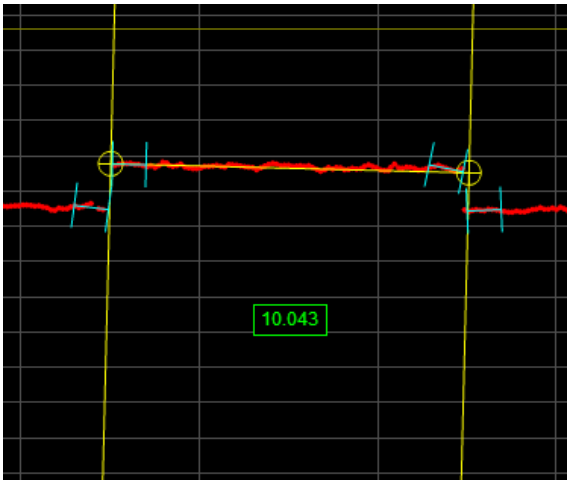

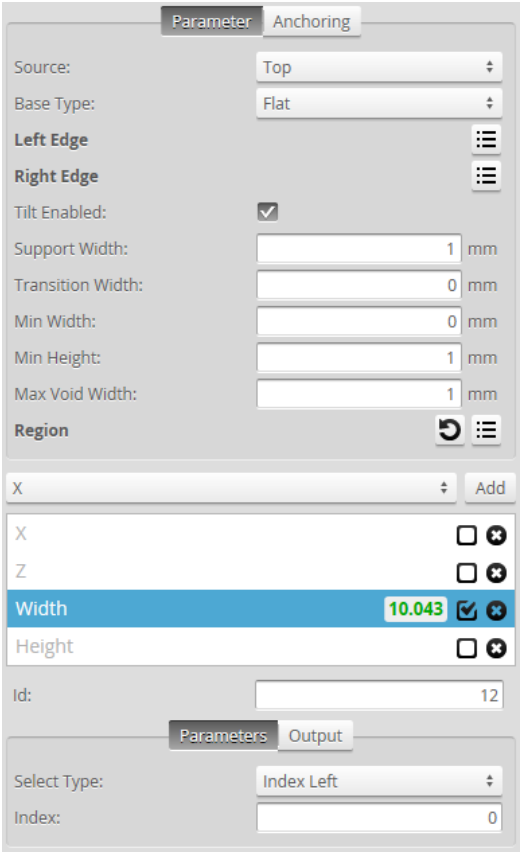




The Strip tool uses a complex feature-locating algorithm to find a strip and then return measurements. See "Strip Algorithm" in the *Gocator Measurement Tool Technical Manual* for a detailed explanation of the algorithm. The behavior of the algorithm can be adjusted by changing the parameters in the measurement panel.

The Strip tool lets you add multiple measurements of the same type to receive measurements and set decisions for multiple strips. Multiple measurements are added by using the drop-down above the list of measurements and clicking on the **Add** button.


For example, if a target has three strips, by adding two measurements, choosing **Index From The Left** in the **Select Type** setting, and providing values of 1 and 3 in the **Index** of field of the measurements, respectively, the Strip tool will return measurements and decisions for the first and third strip.


Measurements

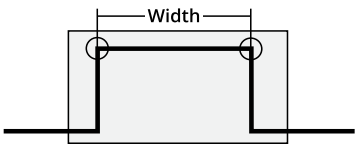
Measurement	Illustration
Width Measures the width of a strip.	

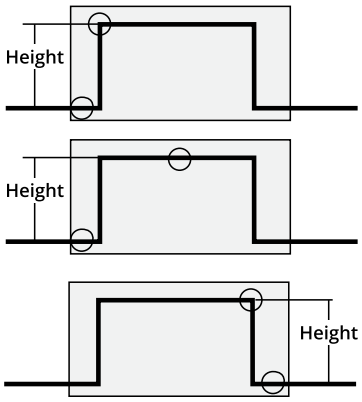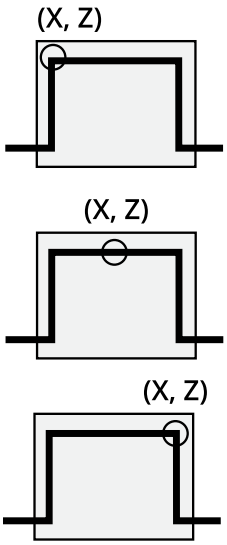Measurement	Illustration
Height Measures the height of a strip.	
X Measures the X position of a strip.	
Z Measures the Z position of a strip.	

Parameters

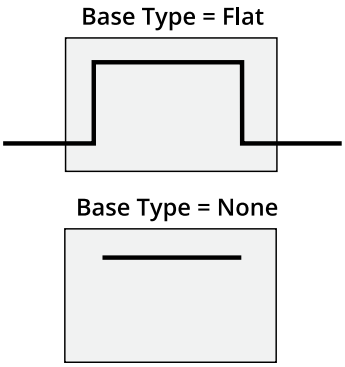
Parameter	Description
Base Type	Affects detection of rising and falling edges.  When **Base Type** is set to **Flat**, both strip (raised area) and base support regions are needed. When set to **None**, only a point that deviates from a smooth strip support region is needed to find a rising or falling edge.

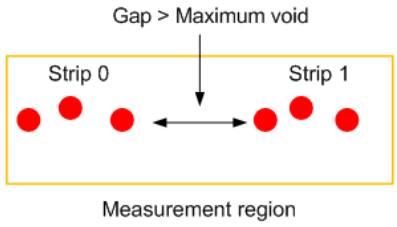Parameter	Description
Location *(Strip Height, Strip X, and Strip Z measurements only)*	Specifies the strip position from which the measurements are performed. **Left** - Left edge of the strip. **Right** - Right edge of the strip. **Center** - Center of the strip.
Left Edge Right Edge	Specifies the features that will be considered as the strip's left and right edges. You can select more than one condition. **Rising** - Rising edge detected based on the strip edge parameters. **Falling** - Falling edge detected based on the strip edge parameters. **Data end** - First valid profile data point in the measurement region. **Void** - Gap in the data that is larger than the maximum void threshold. Gaps connected to the measurement region's boundary are not considered as a void. See "Strip Start and Terminate Conditions" in the *Gocator Measurement Tool Technical Manual* for the definitions of these conditions.
Select Type	Specifies how a strip is selected when there are multiple strips within the measurement area. **Best** - The widest strip. **Index Left** - 0-based strip index, counting from left to right. **Index Right** - 0-based strip index, counting from right to left.
Index	0-based strip index.
Min Height	Specifies the minimum deviation from the strip base. See "Strip Step Edge Definitions" in the *Gocator Measurement Tool Technical Manual* on how this parameter is used for different base types.
Support Width	Specifies the width of the region around the edges from which the data is used to calculate the step change. See "Strip Step Edge Definitions" in the *Gocator Measurement Tool Technical Manual* on how this parameter is used by different base types.
Transition Width	Specifies the nominal width needed to make the transition from the base to the strip. See "Strip Step Edge Definitions" in the *Gocator Measurement Tool Technical Manual* on how this parameter is used by different base types.
Max Void Width	The maximum width of missing data allowed for the data to be considered as part of a strip when **Void** is selected in the **Left** or **Right** parameter. This value must be smaller than the edge **Support Width**.  When occlusion and exposure causes data drops, users should use the gap filling function to fill the gaps. See *Gap Filling* on page 104 for information.

Parameter	Description
Min Width	Specifies the minimum width for a strip to be considered valid.
Tilt Enabled	Enables/disables tile correction.
Decision	See *Decisions* on page 152.
Region	The measurement region defines the region in which to search for the strip. If possible, the region should be made large enough to cover the base on the left and right sides of the strip.  See *Regions* on page 151 for more information.
Output	See *Filters* on page 153.

Tilt

The strip may be tilted with respect to the sensor's coordinate X axis. This could be caused by conveyor vibration. If the Tilt option is enabled, the tool will report the width and height measurements following the tilt angle of the strip.

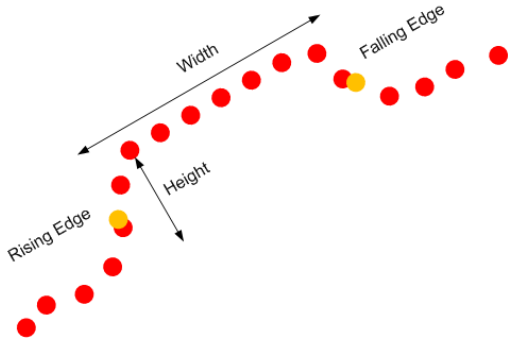


Script


A Script measurement can be used to program a custom measurement using a simplified C-based syntax. A script measurement can produce multiple measurement values and decisions for the output.

> The Script tool can be used whether **Uniform Spacing** is enabled or not, that is, with either resampled or unresampled data. For more information on the **Uniform Spacing** setting and resampled data, see *Uniform Spacing (Data Resampling)* on page 50.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

See *Script Measurement* on page 224 for more information on scripts.

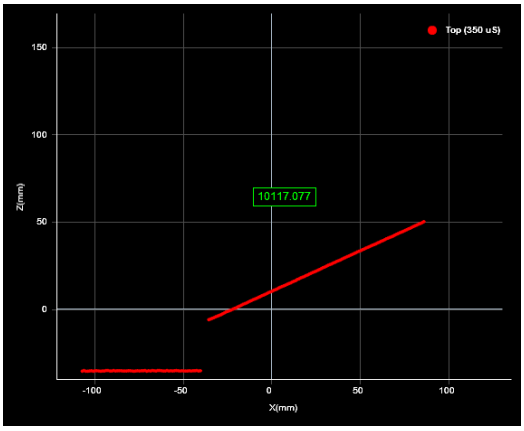

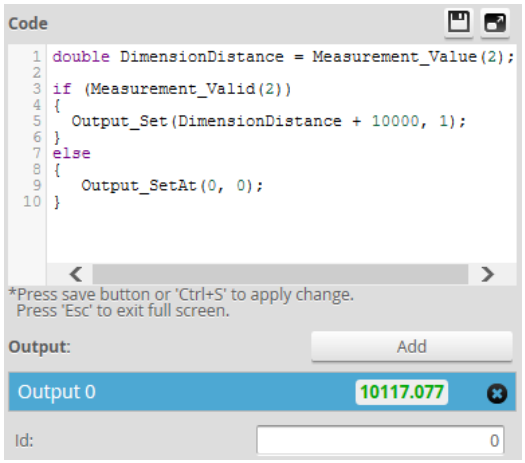

See *Script Measurement* on page 224 for more information on the script syntax.

To create or edit a Script measurement:

1. Add a new Script tool or select an existing Script measurement.


2. Edit the script code.

3. Add script outputs using the **Add** button.
   For each script output that is added, an index will be added to the **Output** drop-down and a unique ID will be generated.
   To remove a script output, click on the button next to it.

4. Click the **Save** button to save the script code.
   If there is a mistake in the script syntax, the result will be shown as a "Invalid" with a red border in the data viewer when you run the sensor.
   Outputs from multiple measurement tools can be used as inputs to the script. A typical script would take results from other measurement tools using the value and decision function, and output the result using the output function. Stamp information, such as time and encoder stamps, are available in the script, whereas the actual profile data is not. (The script engine is not powerful enough to process the data itself.) Only one script can be created.

Surface Measurement

Surface measurement involves capturing a sequence of laser profiles, optionally identifying discrete objects, and measuring properties of the surface or the objects, such as the volume of the object or the height at a certain position of the object. All volumetric tools have the ability to operate either on the entire surface or the full object, or within a region of interest at a certain position in relation to the surface or an object.

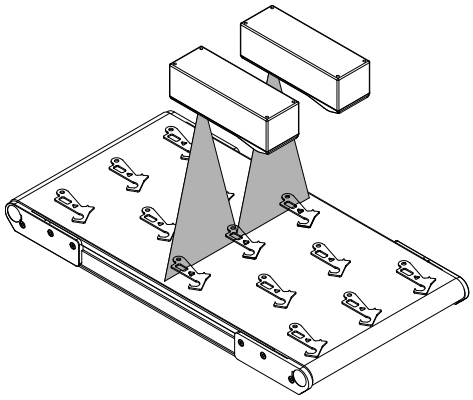

Multiple measurements can be performed on the entire surface or each discrete object, limited only by the available CPU resources.

The frame of reference for the coordinate system of the detected object can be set to **Sensor** or **Part** in the **Part Detection** panel (see on page 111). This setting determines what coordinate system the region of interest for a measurement is positioned in, as well as the coordinate reference used to output measurement values.

For example, if you need to measure the average height in a certain location relative to the sensor's field of view regardless of the objects passing under the sensor, the frame of reference should be set to **Sensor**. This is typical in applications where a wide web of material is continuously scanned, such as paper, rubber, fabrics, etc. If on the other hand you need to measure the average height in a certain location of a scanned object, the frame of reference should be set to **Part**. This is typical in applications where discrete objects pass under the sensor and specific locations on the objects need to be inspected.

Measurement Tools

Bounding Box


The Bounding Box tool provides measurements related to the smallest box that contains the part (for example, X position, Y position, width, length, etc.).

The measurement value can be compared with minimum and maximum constraints to yield a decision.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

A bounding box can be vertical or rotated. A vertical bounding box provides the absolute position from which the Position centroids tools are referenced.


> The vertical bounding box X and Y correspond to the part frame of reference origin. For this reason all X and Y measurements (except Bounding Box Global X and Global Y) are referenced to this point when **Frame of Reference** on the **Part Detection** panel is set to **Part**. See *Part Detection* on page 111 for more information.

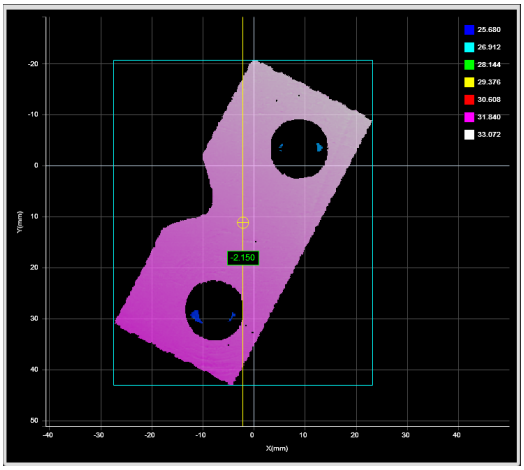





2D View





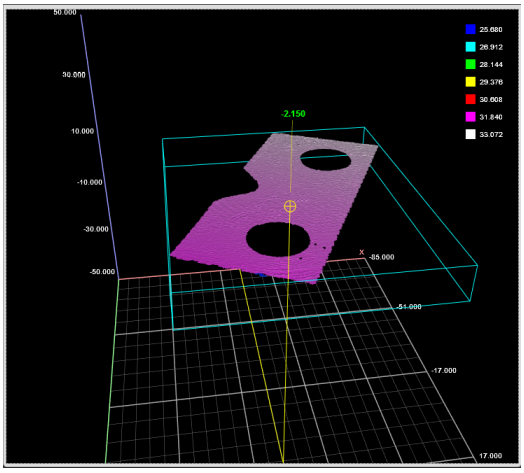


3D View

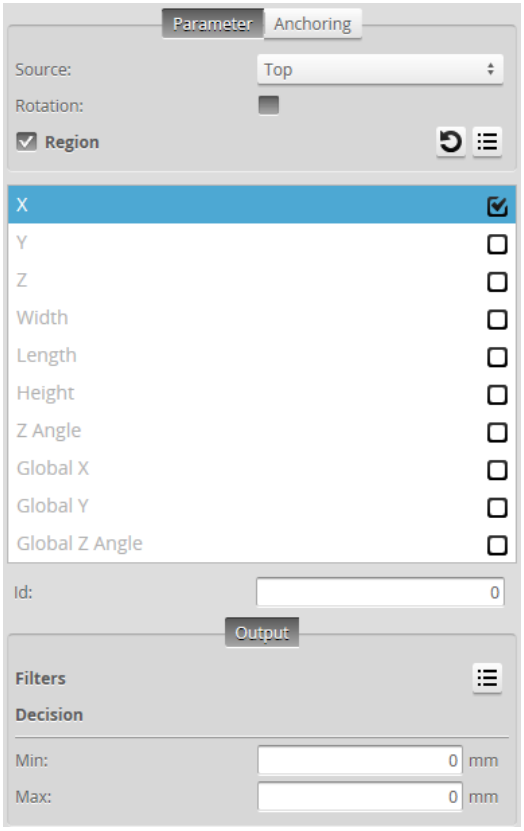

Measurement Panel

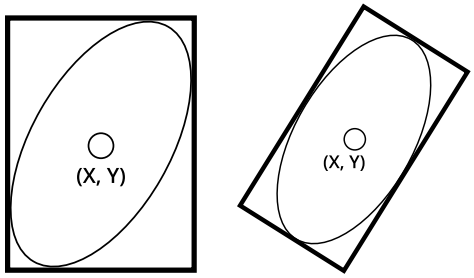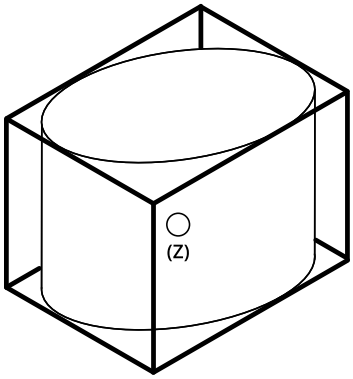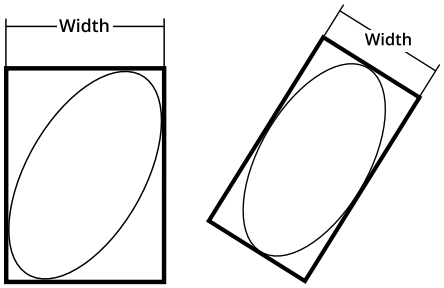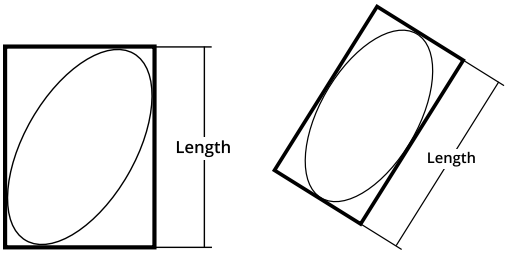Measurement	Illustration
X Determines the X position of the center of the bounding box that contains the part. The value returned is relative to the *part*.	
Y Determines the Y position of the center of the bounding box that contains the part. The value returned is relative to the *part*.	
Z Determines the Z position of the center of the bounding box that contains the part. The value returned is relative to the *part*.	
Width Determines the width of the bounding box that contains the part. When the **Rotation** setting is disabled, the bounding box is the smallest rectangle whose sides are parallel to the X and Y axes. Width is on the X axis. When **Rotation** is enabled, the width is the smaller side dimension.	
Length Determines the length of the bounding box that contains the part. When the **Rotation** setting is disabled, the bounding box is the smallest rectangle whose sides are parallel to the X and Y axes. Length is on the Y axis. When **Rotation** is enabled, the length is the longer side dimension.	

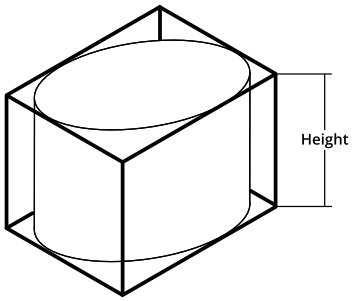Measurement	Illustration
Height Determines the height of the bounding box that contains the part.	
Z Angle Determines the rotation around the Z axis and the angle of the longer side of the bounding box relative to the X axis. If **Rotation** is not enabled, the measurement returns 90.000 degrees.	
Global X* Determines the X position of the center of the bounding box that contains the part *on the surface from which the part was extracted*. **Global Y*** Determines the Y position of the center of the bounding box that contains the part *on the surface from which the part was extracted*. If the part is extracted from a continuous surface, the Y origin of that surface is at the encoder starting position.	 
Global Z Angle* Determines the rotation of the longer side of the bounding box around the Z axis *on the surface from which the part was extracted*. If part matching is enabled, the returned value represents the rotation of the part *before* part matching rotates it. If **Rotation** is not enabled, the measurement returns 90.000 degrees.	

*These measurements are mostly useful with parts extracted from a surface. For more information on parts, see *Part Detection* on page 111.

Parameters

Parameter	Description
Rotation	A bounding box can be vertical or rotated. A vertical bounding box provides the absolute position from which the part's Position centroid measurements are referenced.


Parameter	Description
	Check the **Rotation** setting to select rotated bounding box.
Asymmetry Detection	Resolves the orientation of an object over 360 degrees. The possible values are: 0 – None 1 – Along Major Axis 2 – Along Minor Axis This setting is only visible if **Rotation** is checked.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Countersunk Hole


The Countersunk Hole tool locates a countersunk circular opening within a region of interest on the surface and provides measurements to evaluate characteristics of countersunk holes, including the position (X, Y, and Z) of the center of the hole, outside radius of the hole, hole bevel angle, and the depth of the hole. The countersunk hole can be on a surface at an angle to the sensor.

> The Countersunk Hole tool does not search for or detect a hole. The tool expects that a hole conforming reasonably well to the defined parameters is present and that it is on a sufficiently uniform background.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

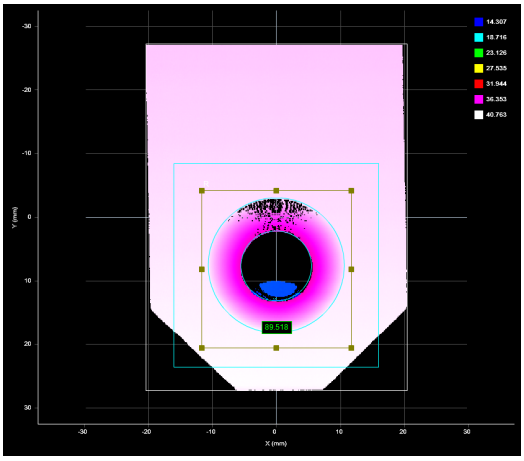





2D View




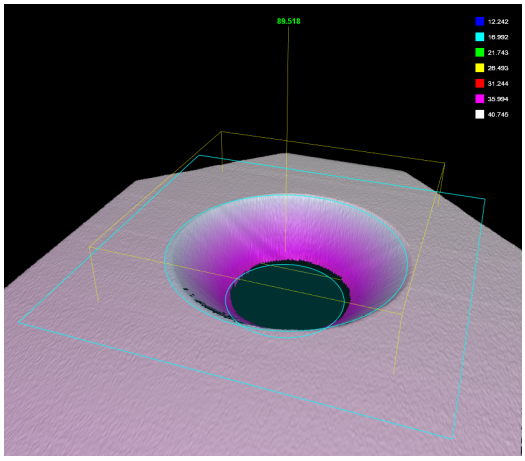




3D View

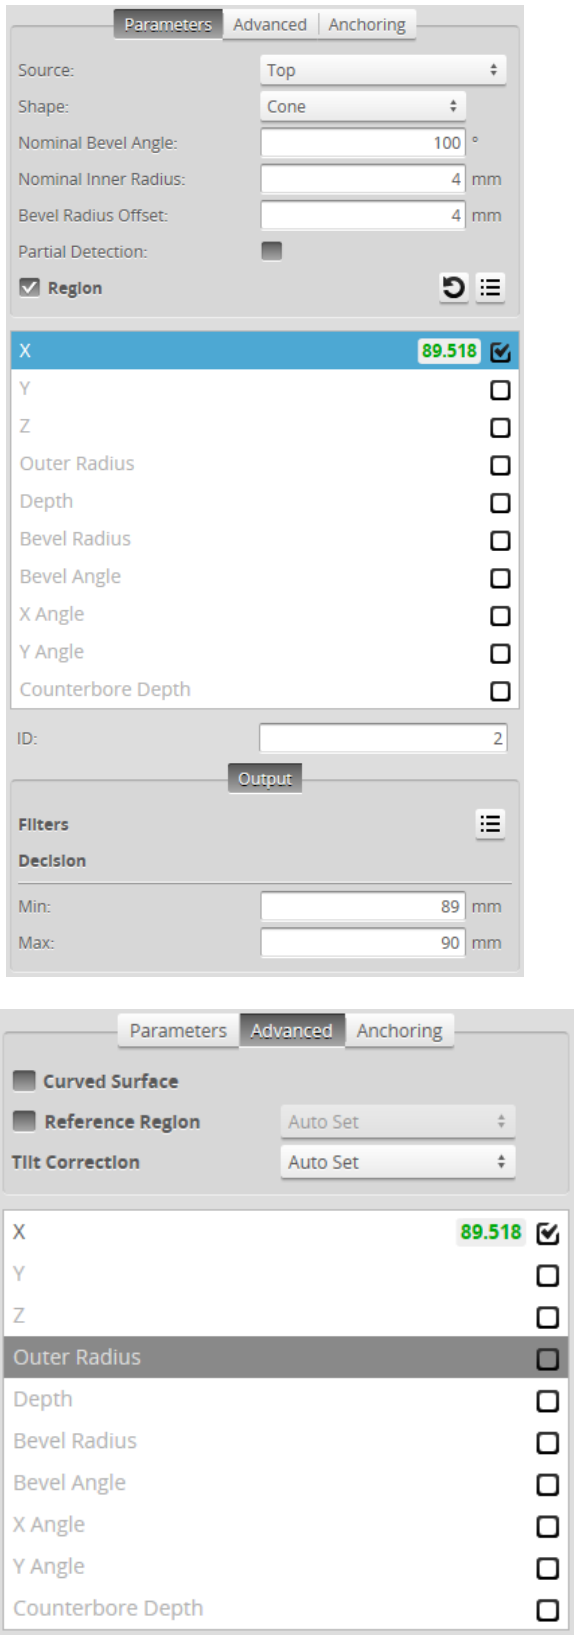

Measurement Panel

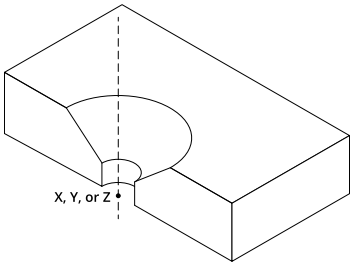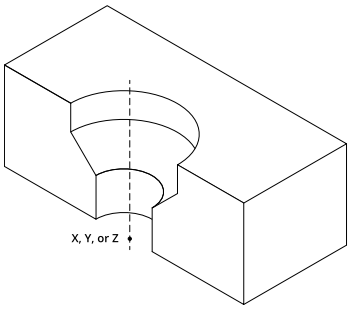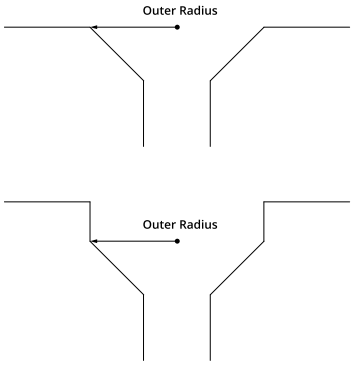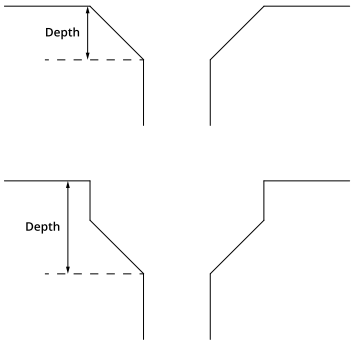
Measurement	Illustration
X Determines the X position of the center of the countersunk hole.	
Y Determines the Y position of the center of the countersunk hole.	
Z Determines the Z position of the center of the countersunk hole.	
Outer Radius Determines the outer radius of the countersunk hole. To convert the radius to a diameter, set the **Scale** setting in the **Output** panel (displayed after expanding the **Filters** section) to 2.	
Depth Determines the depth of the countersunk hole relative to the surface that the countersunk hole is on.	

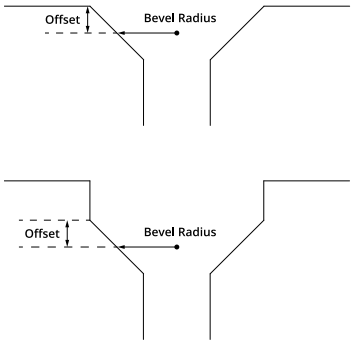Measurement	Illustration
Bevel Radius Determines the radius at a user-defined offset (**Offset** setting) relative to the surface that the countersunk hole is on. To convert the radius to a diameter, set the **Scale** setting in the **Output** panel (displayed after expanding the **Filters** section) to 2.	
Bevel Angle Determines the angle of the hole's bevel.	 *Cone*  *Counterbore*
X Angle Determines the angle the hole relative to the X axis. The measurement assumes that the hole is perpendicular to the surface, even though the surface itself is tilted.	 *Cone*

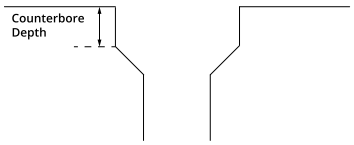Measurement	Illustration
Y Angle Determines the angle of the hole relative to the Y axis. The measurement assumes that the hole is perpendicular to the surface, even though the surface itself is tilted.	 *Counterbore*
Counterbore Depth Determines the depth of a counterbore.	

Parameters

Parameter	Description
Shape	The shape of the countersunk hole. (See illustrations above.) 0 – Cone 1 – Counterbore
Nominal Bevel Angle	The expected bevel angle of the countersunk hole.
Nominal Outer Radius	The expected outer radius of the countersunk hole.
Nominal Inner Radius	The expected inner radius of the countersunk hole.
Bevel Radius Offset	The offset, relative to the surface that the countersunk hole is on, at which the bevel radius will be measured.
Curved Surface	Whether the surface that the countersunk hole is on is curved. When this setting is enabled, specify the orientation of the curvature in degrees in the **Curve Orientation** setting.
Reference Regions	The algorithm uses the Reference Regions option to calculate the Z position of the hole. It is typically used in cases where the surface around the hole is not flat.

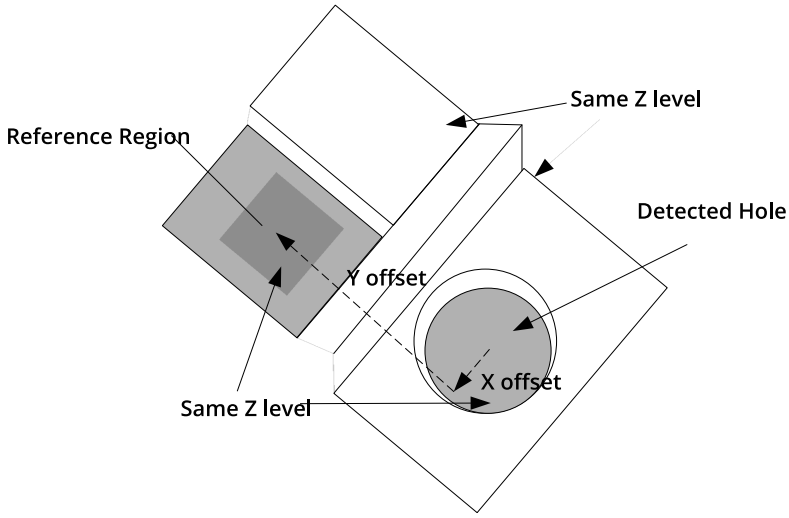
Parameter	Description
	 When this option is set to Autoset, the algorithm automatically determines the reference region. When the option is not set to Autoset, the user manually specifies the reference region. The location of the reference region is relative to the detected center of the hole and positioned on the nominal surface plane. When the Reference Regions option is disabled, the tool measures the hole's Z position using all the data in the measurement region, except for a bounding rectangular region around the hole.
Tilt Correction	Tilt of the target with respect to the alignment plane. When this option is set to Autoset, the tool automatically detects the tilt. Otherwise, the user must enter the angles manually. Autoset requires the measurement region to cover more areas on the surface plane than other planes. The results from the Plane X and Y tool can be used for angles X and Y parameters.
Partial Detection	Enable if only part of the hole is within the measurement region. If disabled, the hole must be completely in the region of interest for results to be valid.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Dimension


The Dimension tool returns various dimensional measurements of a part. You must specify two feature types (see below).

The measurement value can be compared with minimum and maximum constraints to yield a decision.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

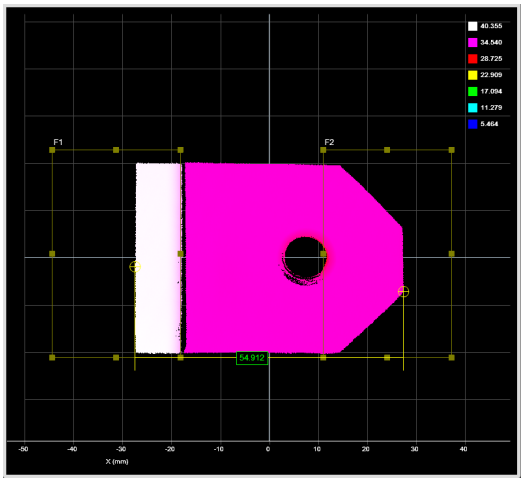




2D View



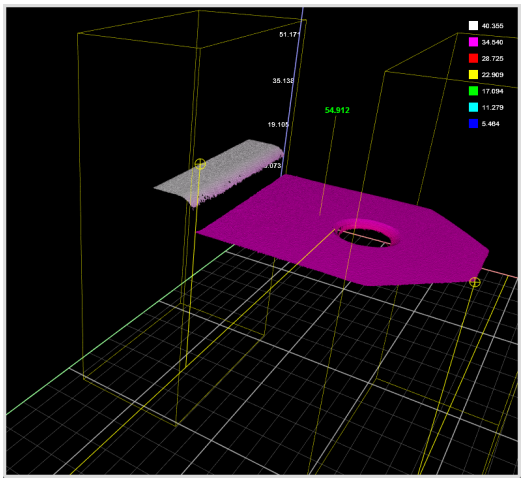


3D View

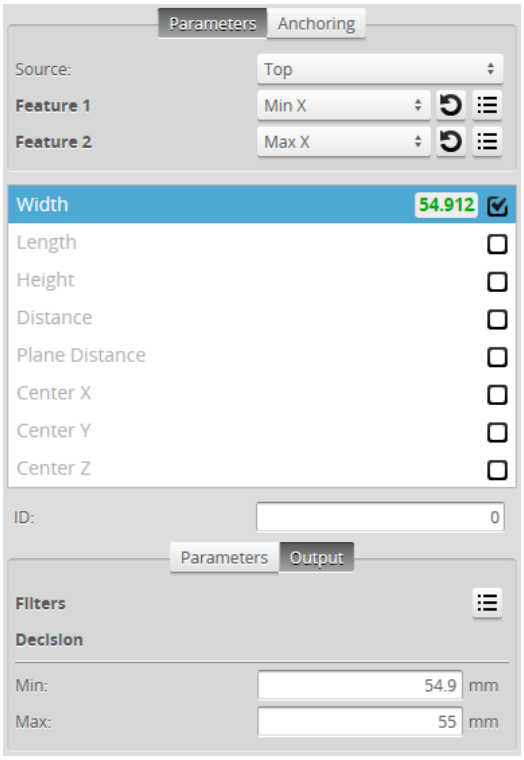

Measurement Panel

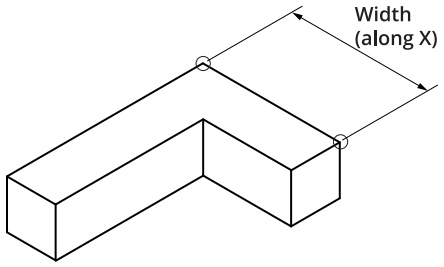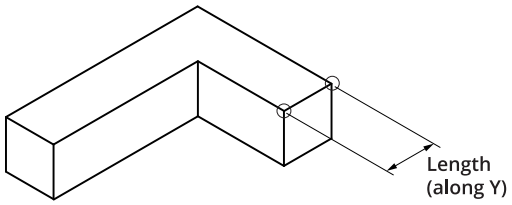Measurement	Illustration
Width Determines the distance between the selected features along the X axis.	
Length Determines the distance between the selected features along the Y axis.	
Height Determines the distance between the selected features along the Z axis.	

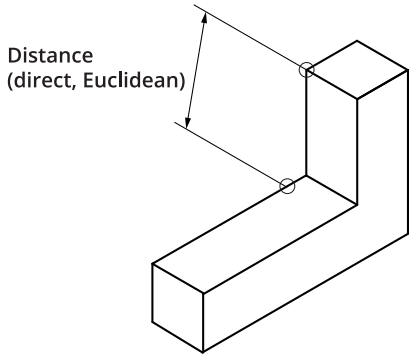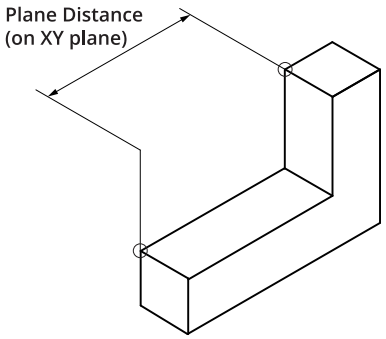Measurement	Illustration
Distance Determines the direct, Euclidean distance between the selected features.	
Plane Distance Determines the distance between the selected features. The position of the lowest feature point is projected onto the XY plane of the highest feature point.	
Center X Determines the X position of the center point between the selected features. **Center Y** Determines the Y position of the center point between the selected features. **Center Z** Determines the Z position of the center point between the selected features.	

Parameters


Parameter	Description
Feature 1 Feature 2	One of the following: • Average (the mean X, Y, and Z of the data points) • Median (median X, Y, and Z of the data points) • Centroid (the centroid of the data considered as a volume with respect to the z = 0 plane) • Min X • Max X • Min Y

Parameter	Description
	• Max Y • Min Z • Max Z
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.


Ellipse

The Ellipse tool provides measurements for the major and minor axis lengths of an ellipse fitted to the part's shape in the XY plane, and also for the ratio of the major and minor axis lengths and for the orientation angle of the ellipse. The measurement value can be compared with minimum and maximum constraints to yield a decision.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

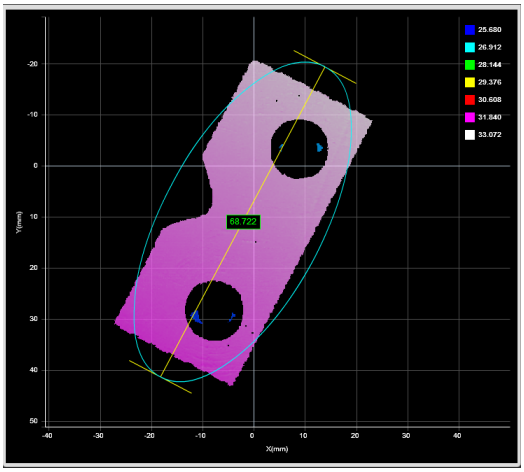

2D View




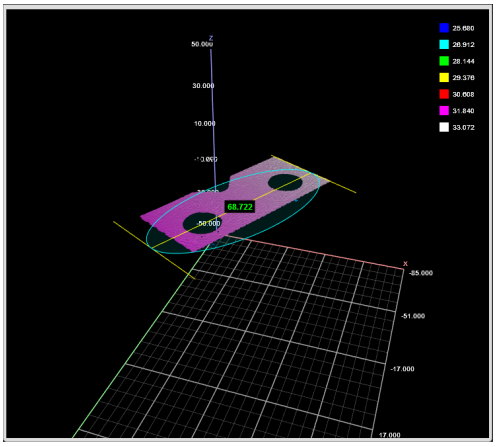


3D View

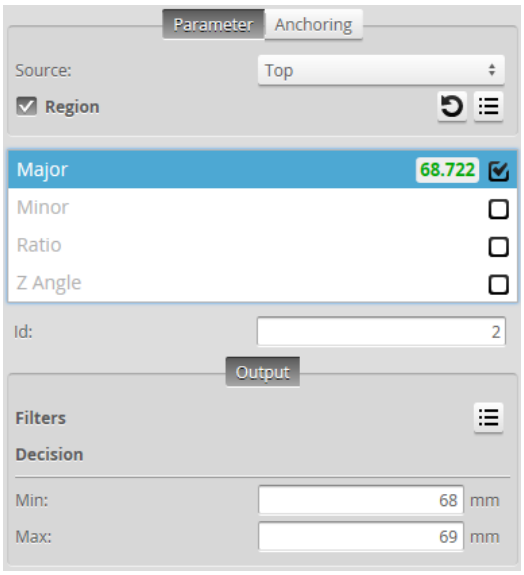

Measurement Panel

Measurements


Measurement	Illustration
Major Determines the major axis length of an ellipse fitted to the part's area in the XY plane.	
Minor Determines the minor axis length of an ellipse fitted to the part's area in the XY plane.	
Ratio Determines the minor/major axis ratio of an ellipse fitted to the part's area in the XY plane.	
Z Angle Determines the orientation angle of an ellipse fitted to the part's area in the XY plane.	

Parameters

Parameter	Description
Asymmetry Detection	Resolves the orientation of an object over 360 degrees. The possible values are: 0 – None 1 – Along Major Axis 2 – Along Minor Axis
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Hole

The Hole tool measures a circular opening within a region of interest on the surface and returns its position and radius.

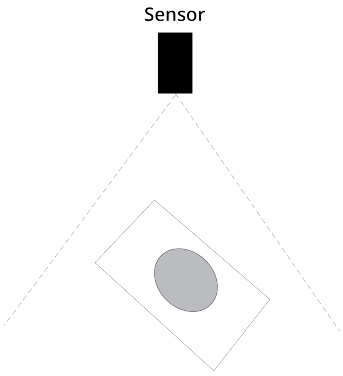


> The Hole tool does not search for or detect a hole. The tool expects that a hole conforming reasonably well to the defined parameters is present and that it is on a sufficiently uniform background.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.


The hole can be on a surface at an angle to the sensor.

The tool uses a complex feature-locating algorithm to find a hold and then return measurements. See "Hole Algorithm" in the *Gocator Measurement Tool Technical Manual* for a detailed explanation of the algorithm. The behavior of the algorithm can be adjusted by changing the parameters in the measurement panel.


The measurement value can be compared with minimum and maximum constraints to yield a decision.

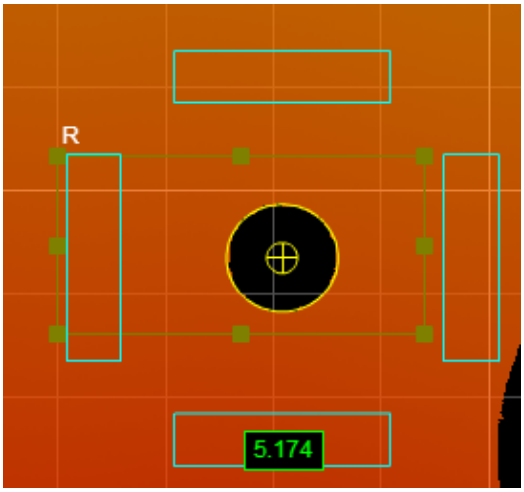


2D View

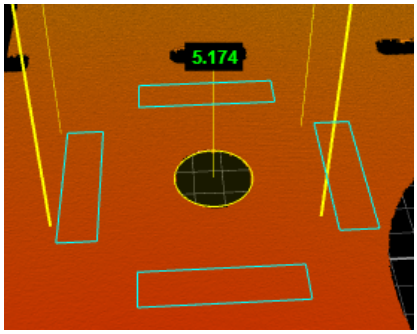



3D View

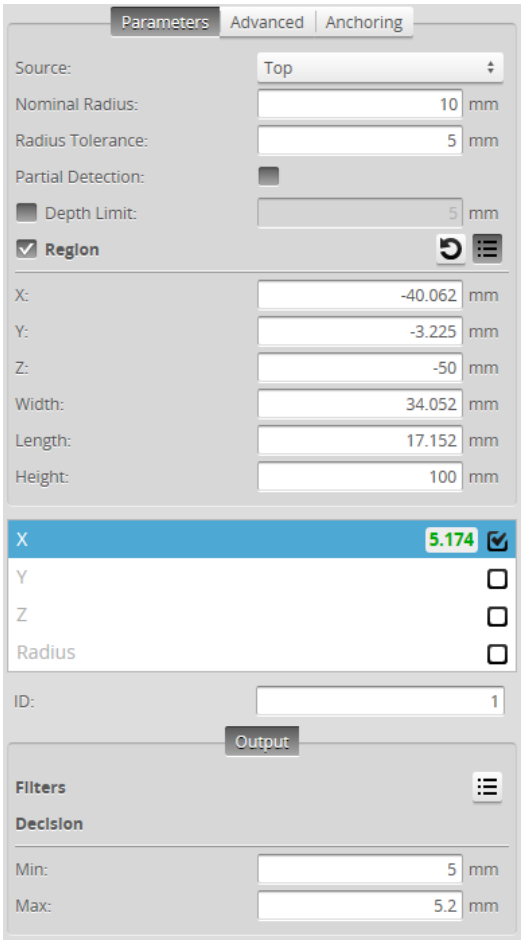

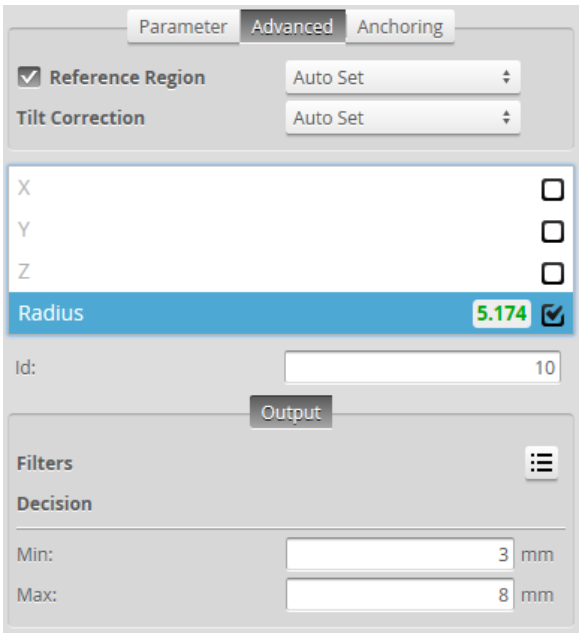



Measurement Panel

Measurements

Measurement	Illustration
X Determines the X position of the hole center.	
Y Determines the Y position of the hole center.	
Z Determines the Z position of the hole center.	
Radius Determines the radius of the hole.	

Parameters


Parameter	Description
Nominal Radius	Expected radius of the hole.
Radius Tolerance	The maximum variation from the nominal radius (+/- from the nominal radius).

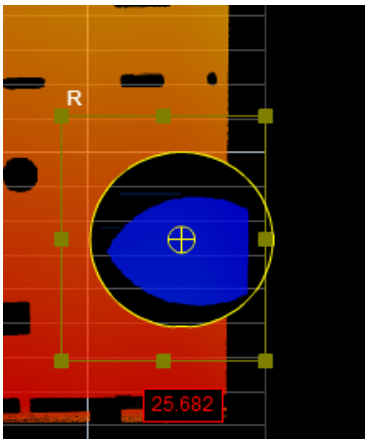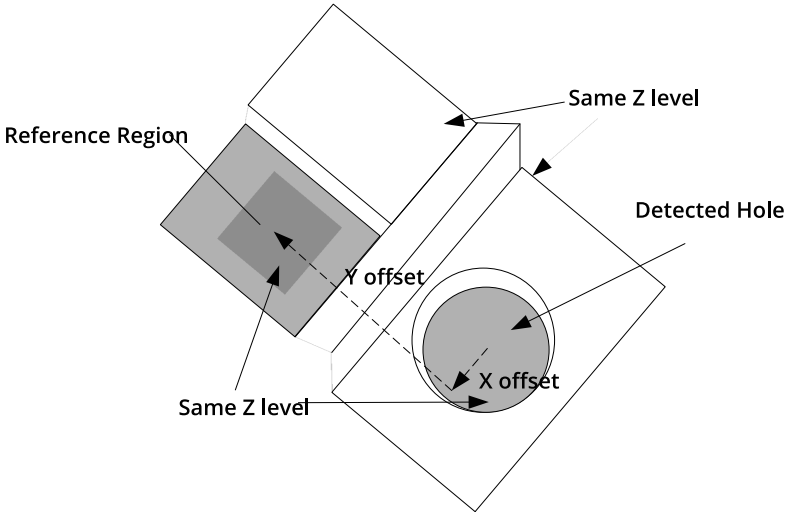Parameter	Description
Partial Detection	Enable if only part of the hole is within the measurement region. If disabled, the hole must be completely in the region of interest for results to be valid. 
Depth Limit	Data below this limit (relative to the surface) is excluded from the hole calculations.
Reference Regions	The algorithm uses the Reference Regions option to calculate the Z position of the hole. It is typically used in cases where the surface around the hole is not flat.  When this option is set to Autoset, the algorithm automatically determines the reference region. When the option is not set to Autoset, the user manually specifies the reference region. The location of the reference region is relative to the detected center of the hole and positioned on the nominal surface plane. When the Reference Regions option is disabled, the tool measures the hole's Z position using all the data in the measurement region, except

Parameter	Description
	for a bounding rectangular region around the hole.
Tilt Correction	Tilt of the target with respect to the alignment plane. When this option is set to Autoset, the tool automatically detects the tilt. Otherwise, the user must enter the angles manually. Autoset requires the measurement region to cover more areas on the surface plane than other planes. The results from the Plane X and Y tool can be used for angles X and Y parameters.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.


Measurement Region

The center of the hole must be inside the measurement region, even if the Partial Detection option is enabled.

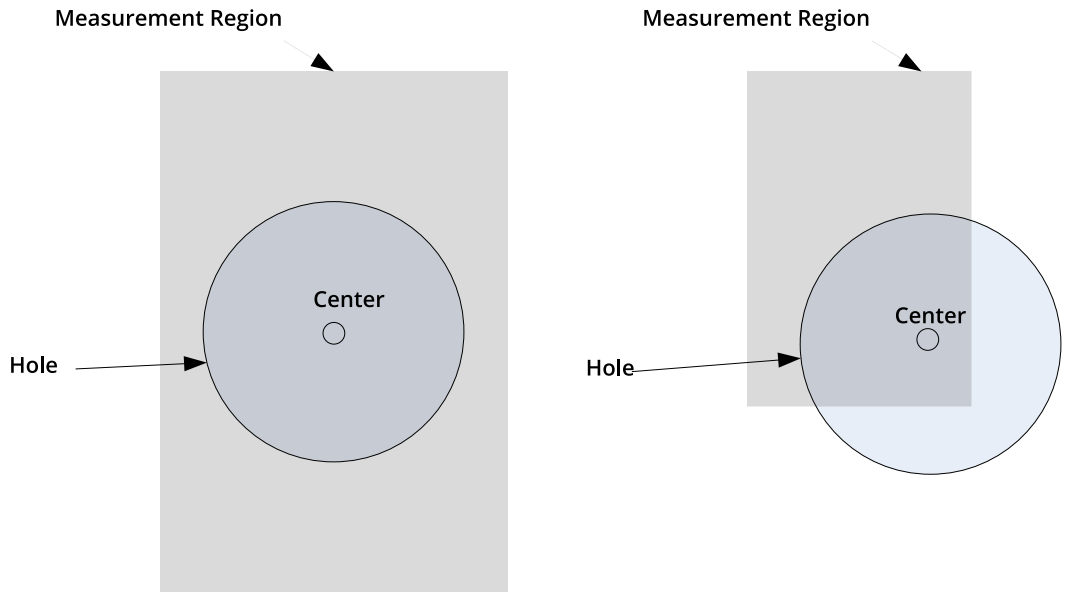

Opening

The Opening tool locates rounded, rectangular, and rounded corner openings. The opening can be on a surface at an angle to the sensor.

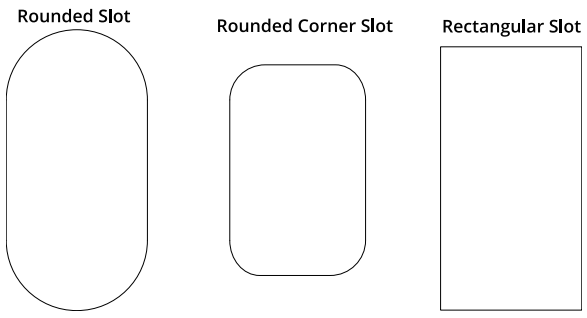

> The Opening tool does not search for or detect an opening. The tool expects that an opening conforming reasonably well to the


	defined parameters is present and that it is on a sufficiently uniform background.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

The tool uses a complex feature-locating algorithm to find a hold and then return measurements. See "Opening Algorithm" in the *Gocator Measurement Tool Technical Manual* for a detailed explanation of the algorithm. The behavior of the algorithm can be adjusted by changing the parameters in the measurement panel.


The measurement value can be compared with minimum and maximum constraints to yield a decision. You can select the measurement region in which the opening is expected to appear.


The algorithm can separate out background information that appears inside the opening. It can also detect a slot that only partially appears in the data.

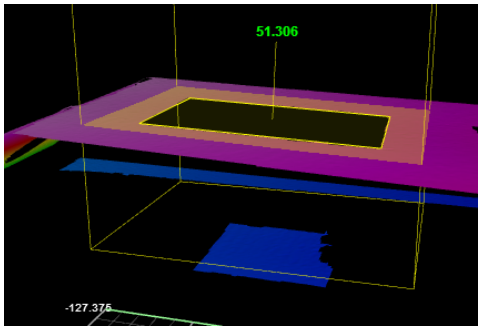


The shape of the opening is defined by its type and its nominal width, length, and radius.

The orientation defines the rotation around the normal of the alignment plane.

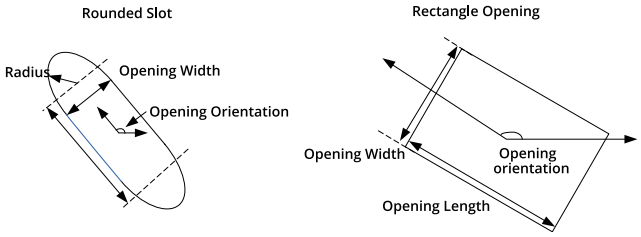


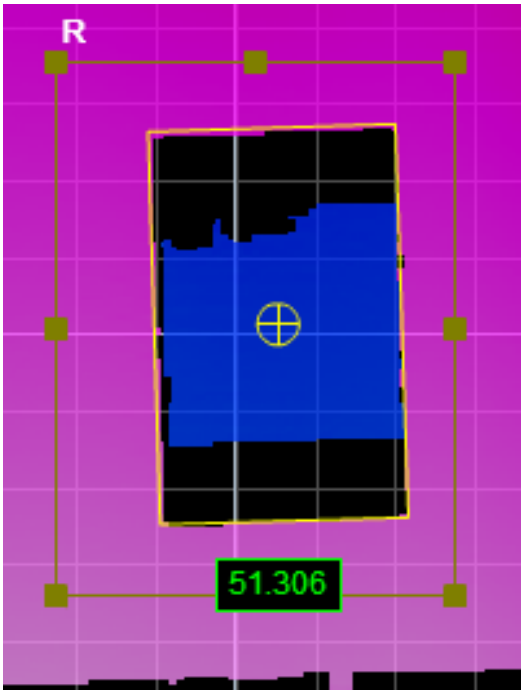


2D View

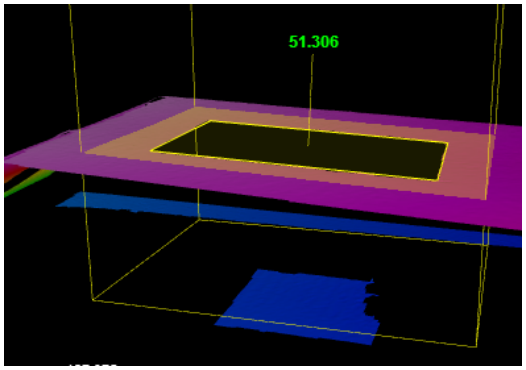




3D View

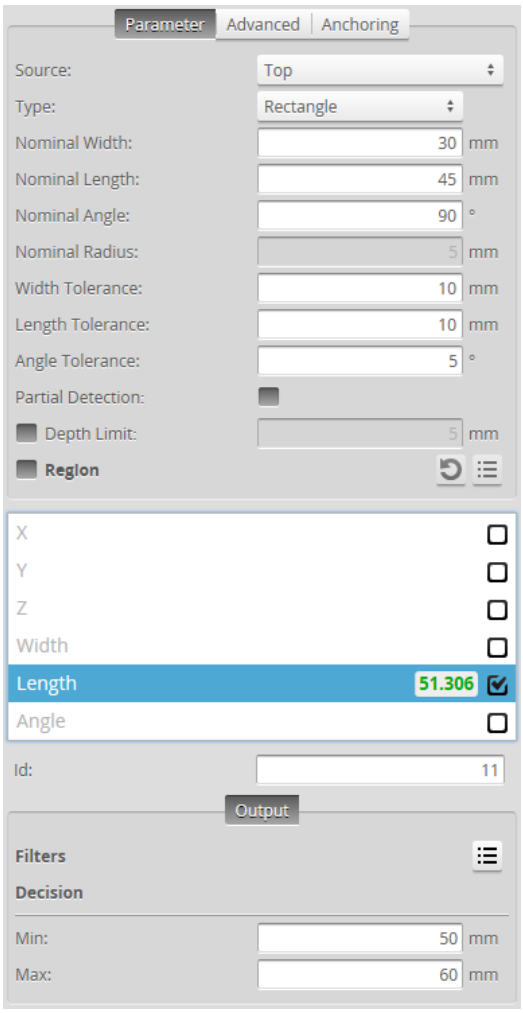

Parameter
Advanced
Anchoring
Source:
Top
Type:
Rectangle
Nominal Width:
30
mm
Nominal Length:
45
mm
Nominal Angle:
90
°
Nominal Radius:
5
mm
Width Tolerance:
10
mm
Length Tolerance:
10
mm
Angle Tolerance:
5
°
Partial Detection:
Depth Limit:
5
mm
Region
X
Y
Z
Width
Length
51.306
Angle
Id:
11
Output
Filters
Decision
Min:
50
mm
Max:
60
mm

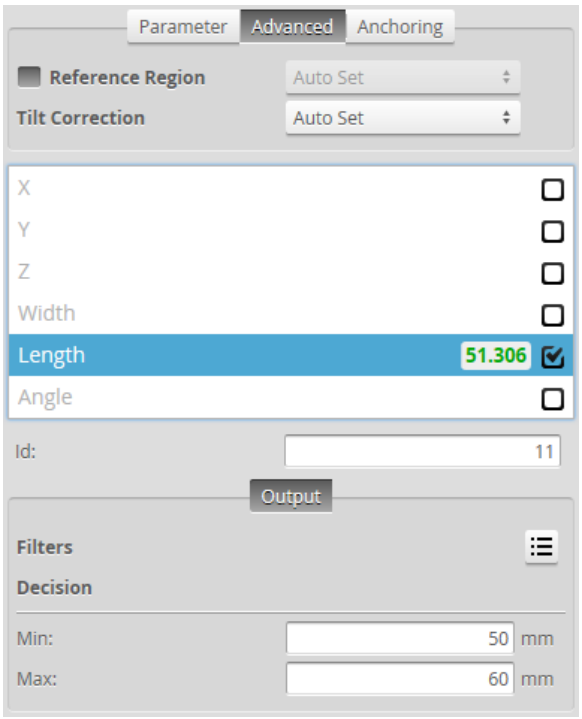


Measurement Panel



Measurements


Measurement	Illustration
X Determines the X position of the opening's center.	
Y Determines the Y position of the opening's center.	
Z Determines the Z position of the opening's center.	
Width Determines the width of the opening.	
Length Determines the length of the opening.	

Measurement	Illustration
Angle Determines the angle (rotation) around the normal of the alignment plane.	

Parameters

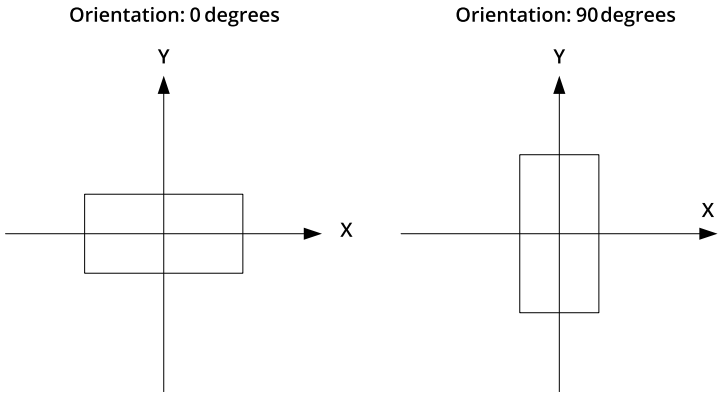
Parameter	Description
Type	Rounded Slot, Rectangle.
Nominal Width	Nominal width of the opening.
Nominal length	Nominal length of the opening.
Nominal Angle	Nominal angle of the opening. The default orientation is the length of the opening along the X axis.  The diagram above illustrates the case where the surface is not tilted. When the surface is tilted, the orientation is defined with respect to the normal of the surface, not with respect to the X-Y plane
Nominal Radius	Nominal radius of the opening ends. If the opening type is set to rectangular, the radius setting is disabled. The opening has an oval shape if the radius is equal to ½ of the width. The opening is a rounded rectangle when the radius is less than ½ of the width.

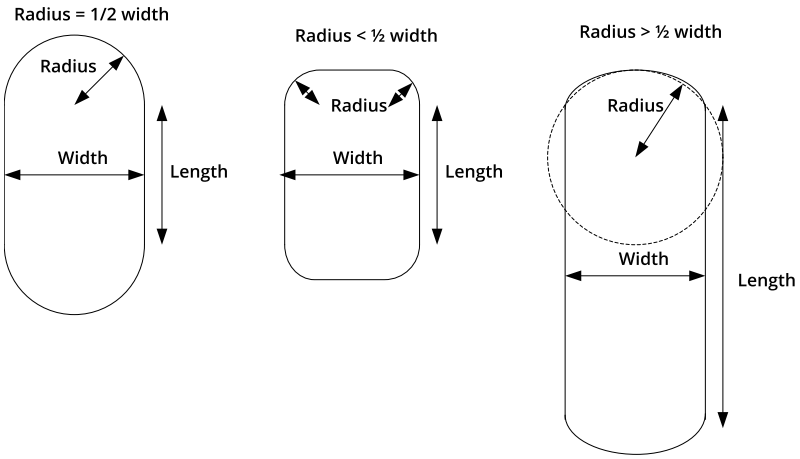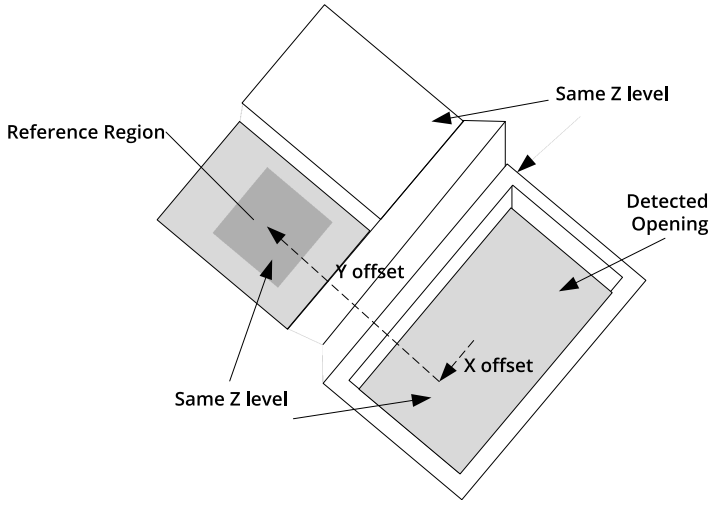Parameter	Description
	
Width Tolerance	The maximum variation from the nominal width (+/- from the nominal value).
Length Tolerance	The maximum variation from the nominal length (+/- from the nominal value).
Angle Tolerance	The maximum variation from the nominal orientation (+/- from the nominal value).
Partial Detection	Enable if only part of the opening is within the measurement region. If disabled, the opening must be completely in the region of interest for results to be valid.
Depth Limit	Data below this limit (relative to the surface) is excluded from the opening calculations.
Reference Regions	The algorithm uses reference regions to calculate the Z position of the opening. Reference regions are relative to the center location of the feature. This option is typically used in cases where the surface around the opening is not flat.  When the Reference Regions setting is disabled, the tool measures the opening's Z position using the all data in the measurement region, except for a bounding rectangular region around the opening.

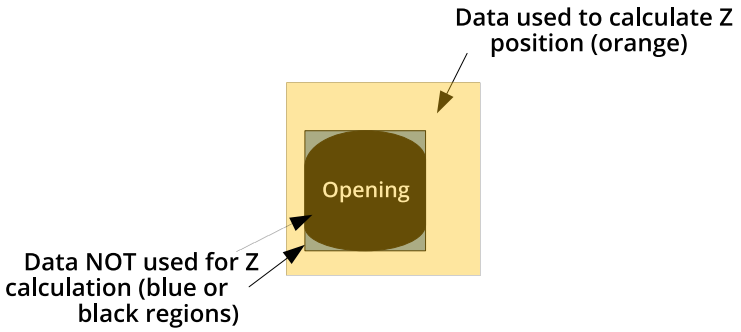Parameter	Description
	 With one or more reference region, the algorithm calculates the Z positions as the average values of the data within the regions. When the user places the reference region manually, all of the data is used, whether the data is inside or outside the opening. The user should place the reference region carefully.
Tilt Correction	Tilt of the target with respect to the alignment plane. Set to Auto-Set to have the tool automatically detect the target's tilt, or enter the angles manually. Auto-Set requires the measurement region to cover more areas on the surface plane than other planes. The results from the Plane X and Y tool can be used for angles X and Y parameters.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Measurement Region

The center and the two sides and ends of the opening must be within the measurement region, even if Partial Detection is enabled.

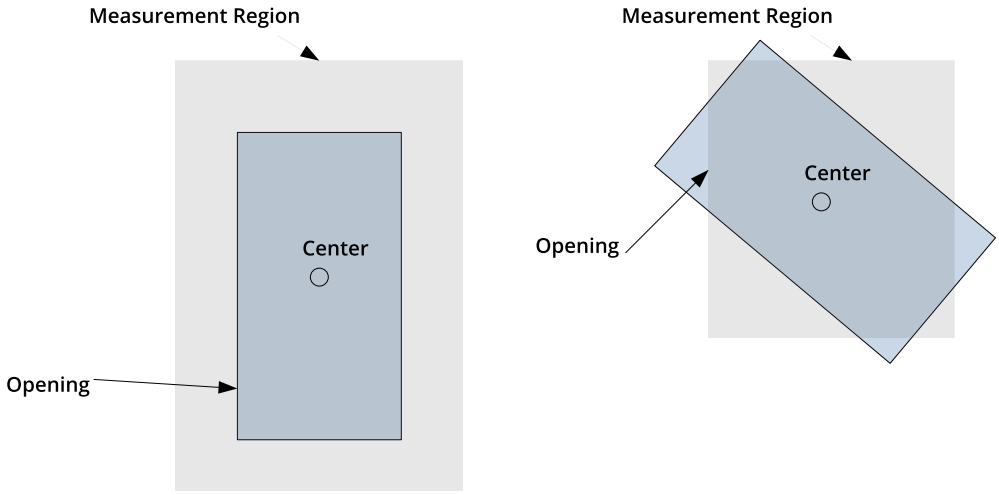

Plane


The Plane tool provides measurements that report angle X, angle Y, and offset Z of the surface with respect to the alignment target. The measurement value can be compared with minimum and maximum

constraints to yield a decision.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

The Z offset reported is the Z position at zero position on the X axis and the Y axis.


The results of the Plane Angle X and Plane Angle Y measurements can be used to customize the tilt angle in the Hole, Opening, and Stud tools.

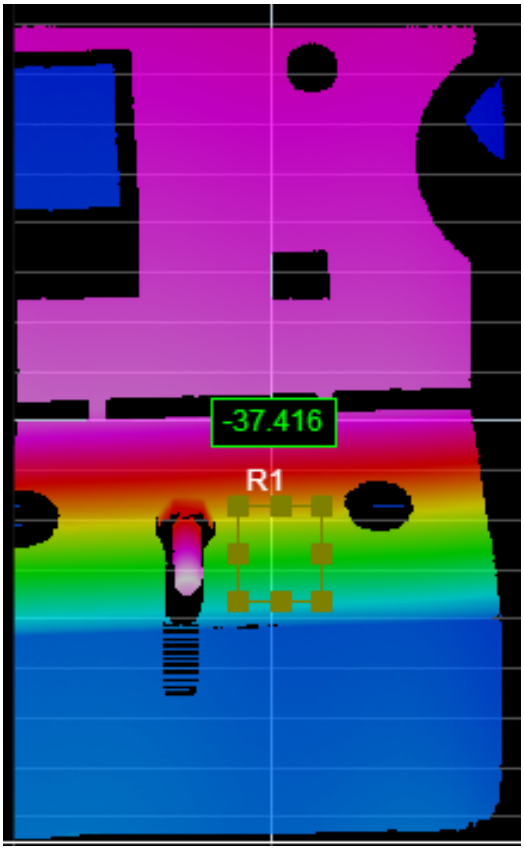

2D View


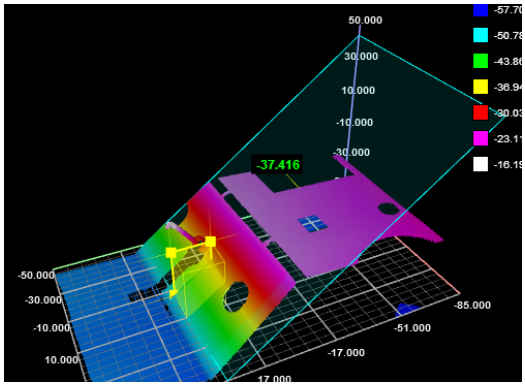


3D View

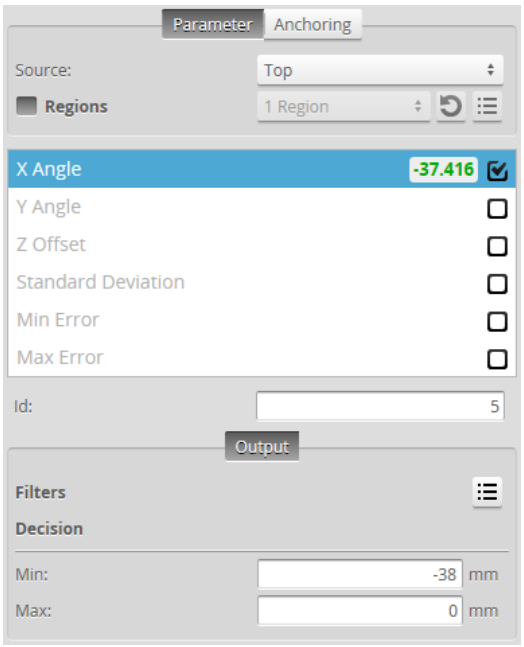

Measurement Panel

Measurements

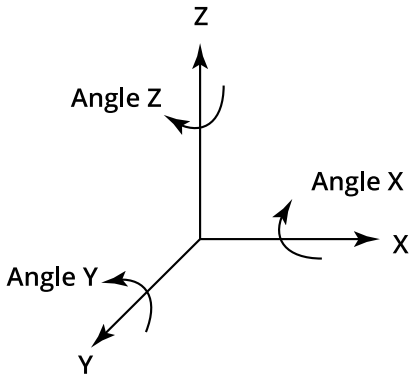Measurement	Illustration
Angle X Determines the X angle of the surface with respect to the alignment target.	
Angle Y Determines the Y angle of the surface with respect to the alignment target.	
Offset Z Determines the Z offset of the surface with respect to the alignment target.	
Standard Deviation Measures the standard deviation of the points of the surface from the detected plane.	
Min Error Measures the minimum error from the detected plane (the maximum distance below the plane).	

Measurement	Illustration
Max Error Measures the maximum error from the detected plane (the maximum distance above the plane).	

Parameters


Parameter	Description
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Position


The Position tool reports the X, Y, or Z position of a part. The feature type must be specified and is one of the following: Average (the mean X, Y, and Z of the data points), Median (median X, Y, and Z of the data points), Centroid (the centroid of the data considered as a volume with respect to the z = 0 plane), Min X, Max X, Min Y, Max Y, Min Z, or Max Z.

The measurement value can be compared with minimum and maximum constraints to yield a decision.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

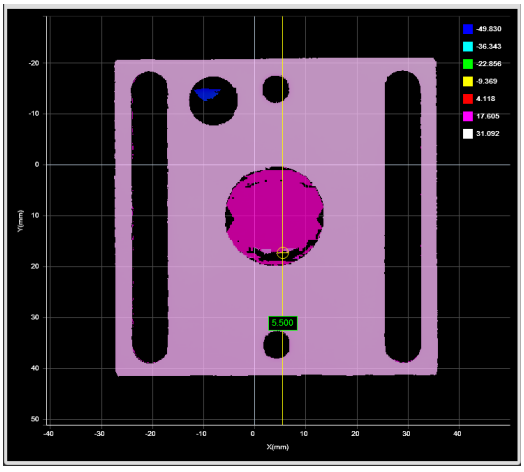

2D View

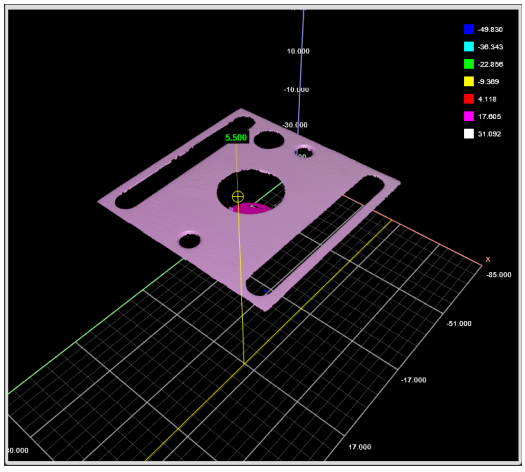


3D View

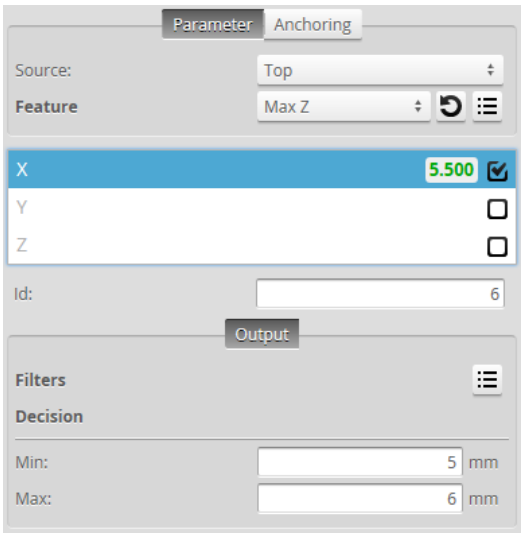

Measurement Panel

Measurements

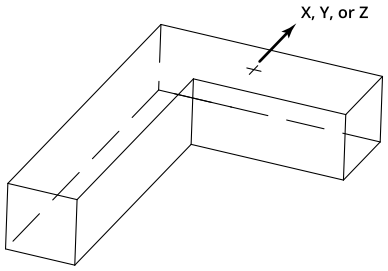Measurement	Illustration
X Determines the X position of the selected feature type.	
Y Determines the Y position of the selected feature type.	
Z Determines the Z position of the selected feature type.	


Parameters

Parameter	Description
Feature Type	One of the following: Average, Centroid, Min X, Max X, Min Y, Max Y, Min Z, Max Z, Median.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.

Stud

The Stud tool measures the location and radius of a stud.

> The Stud tool does not search for or detect a stud. The tool expects that a stud conforming reasonably well to the defined parameters is present and that it is on a sufficiently uniform background.

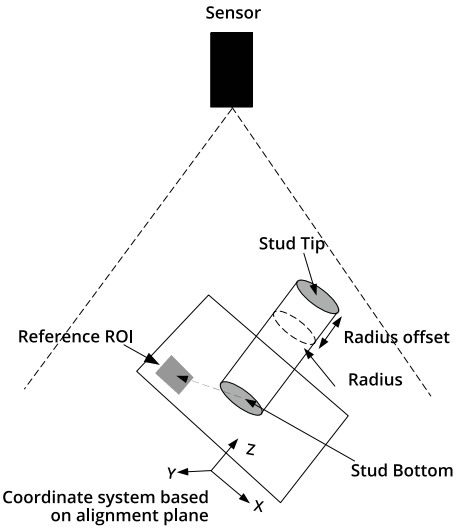


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.


The tool uses a complex feature-locating algorithm to find a hold and then return measurements. See "Stud Algorithm" in the *Gocator Measurement Tool Technical Manual* for a detailed explanation of the algorithm. The behavior of the algorithm can be adjusted by changing the parameters in the measurement panel.

The measurement value can be compared with minimum and maximum constraints to yield a decision.


The location of the stud is defined at either the stud tip or the stud base. The tip is the intersection of the stud axis and the top of the stud; the base is the intersection of the stud axis and the surrounding plane.

The stud shape is defined by the tip height and base height. The base and tip heights specify where the shaft with the nominal radius begins and ends.

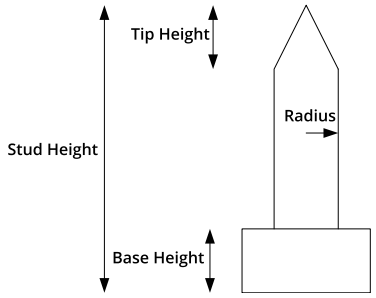


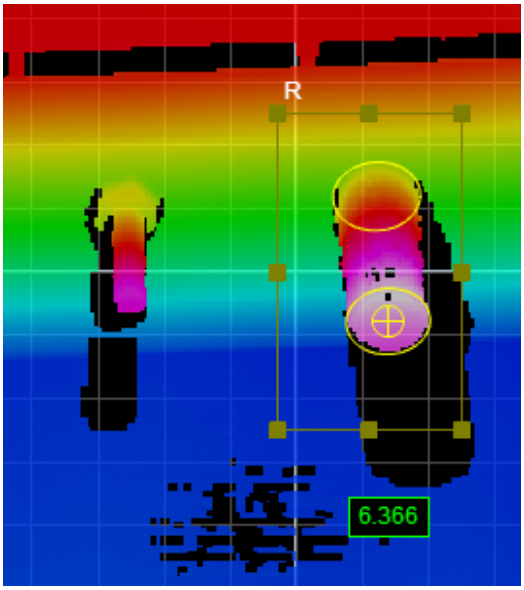


2D View

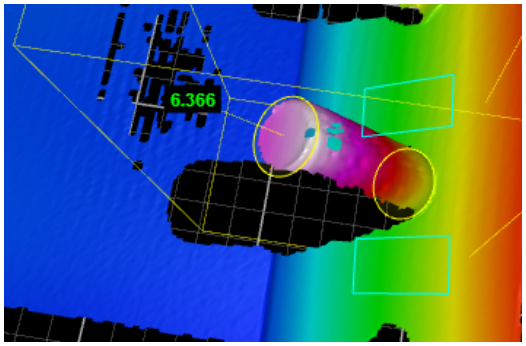




3D View

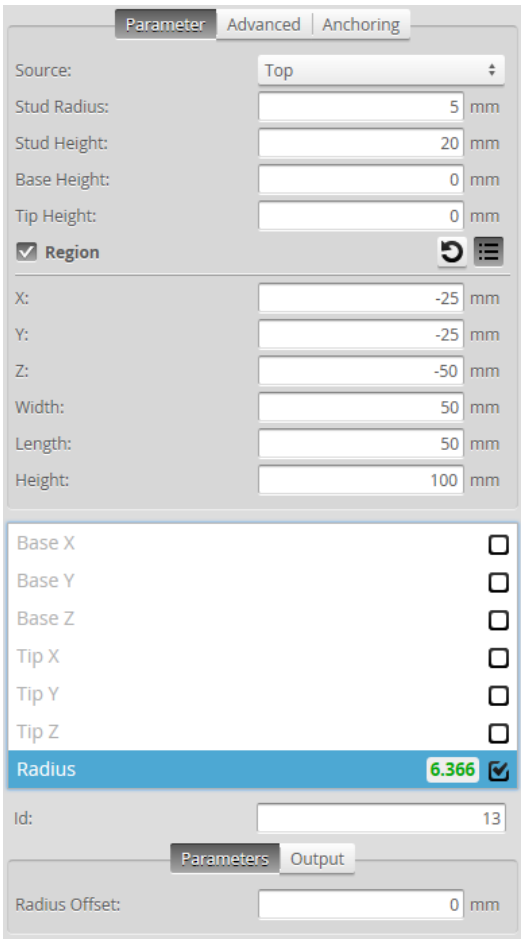

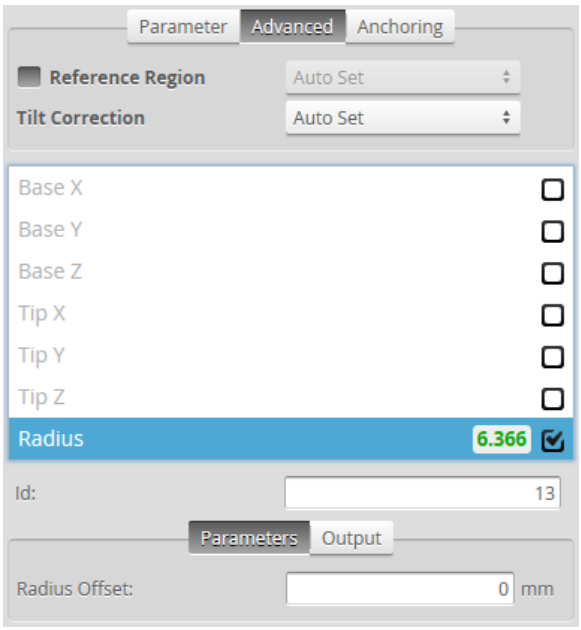

Measurement Panel

Measurements

Measurement	Illustration
Tip X Determines the X position of the stud tip.	
Tip Y Determines the Y position of the stud tip.	
Tip Z Determines the Z position of the stud tip.	
Base X Determines the X position of the stud base.	
Base Y Determines the Y position of the stud base.	
Base Z Determines the Z position of the stud base.	
Radius Determines the radius of the stud.	

Parameters

Parameter	Description
Nominal Stud Radius	Expected radius of the stud.
Nominal Stud Length	Expected length of the stud.
Base Height	The height above the base surface that will be ignored when the (truncated) cone is fit to the stud data.
Tip Height	The height from the top of the surface that will be ignored when the (truncated) cone is fit to the stud data.
Radius Offset *(Radius measurement only)*	The distance from the tip of the stud from which the radius is measured.
Reference Regions	The algorithm uses reference regions to calculate the base plane of the stud. Reference regions are relative to the base of the stud.
Tilt Correction	Tilt of the target with respect to the alignment plane. Set to Auto-Set to have the tool automatically detect the tilt, or enter the angles manually. Auto-Set requires the measurement region to cover more areas on the surface plane than other planes. The results from the Plane X and Y tool can be used for angles X and Y parameters.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.


Measurement Region

The tip and the side of the stud must be within the measurement region.


Volume

The Volume tool determines the volume, area, and thickness of a part. The measurement value can be compared with minimum and maximum constraints to yield a decision.


See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

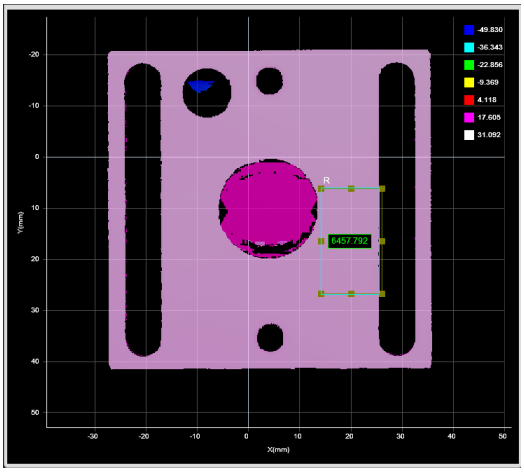

2D View



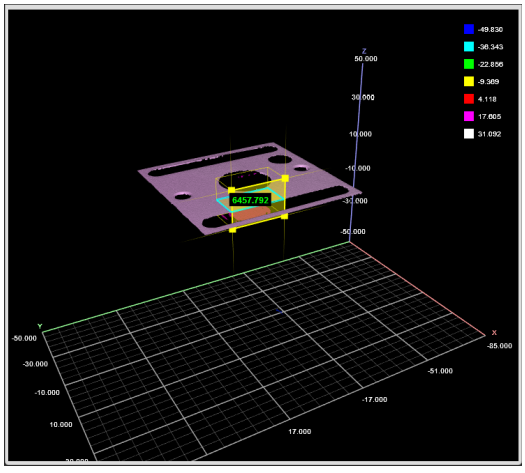


3D View

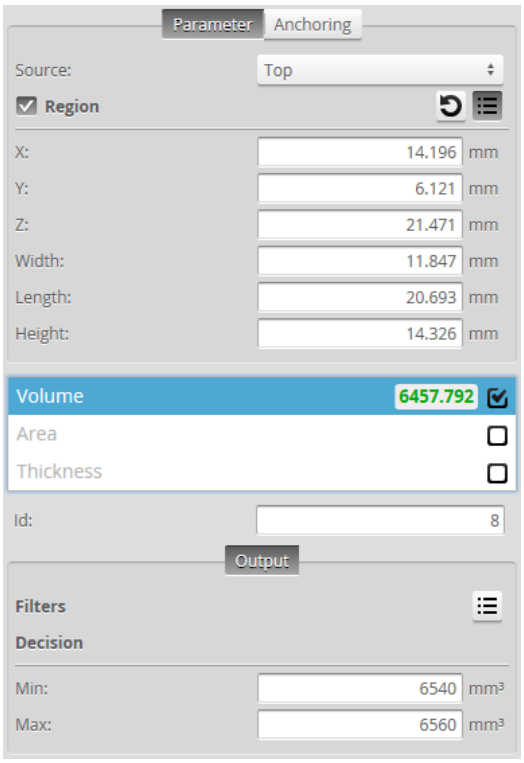

Measurement Panel

Measurements

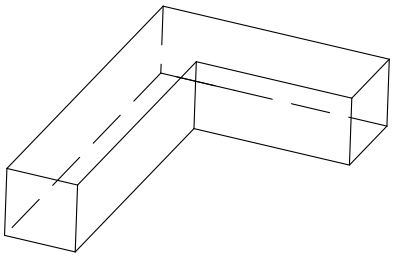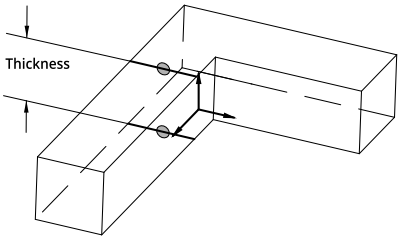Measurement	Illustration
Volume Measures volume in XYZ space.	
Area Measures area in the XY plane.	
Thickness Measures thickness (height) of a part.	

Parameters


Parameter	Description
Location *(Thickness measurement only)*	One of the following: maximum height, minimum height, average height, median height, the height at the 2D centroid in the XY plane, or the height at the 3D centroid in XYZ space.
Decision	See *Decisions* on page 152.
Region	See *Regions* on page 151.
Output	See *Filters* on page 153.


Script

A Script measurement can be used to program a custom measurement using a simplified C-based syntax. A script measurement can produce multiple measurement values and decisions for the output.

See *Adding and Configuring a Tool* on page 149 for instructions on how to add measurement tools.

See *Script Measurement* on the next page for more information on scripts.

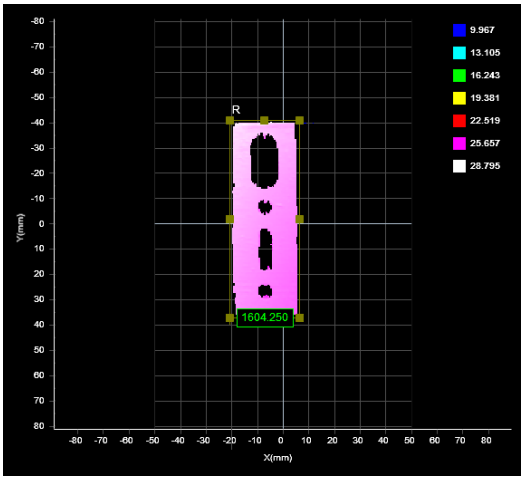

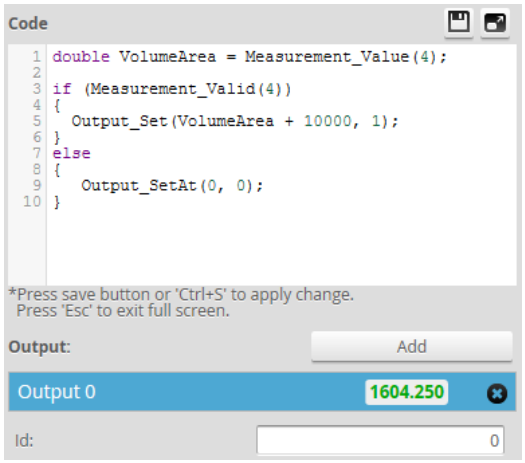

See *Script Measurement* on the next page for more information on the script syntax.

To create or edit a Script measurement:

1. Add a new Script tool or select an existing Script measurement.

2. Edit the script code.

3. Add script outputs using the **Add** button.
   For each script output that is added, an index will be added to the **Output** drop-down and a unique ID will be generated.

To remove a script output, click on the button next to it.

4. Click the **Save** button to save the script code.
   If there is a mistake in the script syntax, the result will be shown as a "Invalid" with a red border in the data viewer when you run the sensor.
   Outputs from multiple measurement tools can be used as inputs to the script. A typical script would take results from other measurement tools using the value and decision function, and output the result using the output function. Stamp information, such as time and encoder stamps, are available in the script, whereas the actual 3D point cloud data is not. (The script engine is not powerful enough to process the data itself.) Only one script can be created.

Script Measurement

A Script measurement can be used to program a custom measurement using a simplified C-based syntax. Similar to other measurement tools, a script measurement can produce multiple measurement values and decisions for the output.

> Scripts must be less than 27000 characters long.

The following elements of the C language are supported:

Supported Elements

Elements	Supported
Control Operators	if, while, do, for, switch and return.
Data Types	char, int, unsigned int, float, double, long long (64-bit integer).
Arithmetic and Logical Operator	Standard C arithmetic operators, except ternary operator (i.e., "condition? trueValue: falseValue"). Explicit casting (e.g., int a = (int) a_float) is not supported.
Function Declarations	Standard C function declarations with argument passed by values. Pointers are not supported.

Built-in Functions

Measurement Functions

Function	Description
int Measurement_Exists(int id)	Determines if a measurement exists by ID. Parameters: id – Measurement ID Returns: 0 – measurement does not exist 1 – measurement exists
int Measurement_Valid(int id)	Determines if a measurement value is valid by its ID. Parameters: id - Measurement ID

Function	Description
	Returns 0 - Measurement is invalid 1 - Measurement is valid
double Measurement_Value (int id)	Gets the value of a measurement by its ID. Parameters: id - Measurement ID Returns: Value of the measurement 0 – if measurement does not exist 1 – if measurement exists
int Measurement_Decision (int id)	Gets the decision of a measurement by its ID. Parameters: ID - Measurement ID Returns: Decision of the measurement 0 – if measurement decision is false 1 – If measurement decision is true
int Measurement_NameExists(char* toolName, char* measurementName)	Determines if a measurement exist by name. Parameter: toolName – Tool name measurementName – Measurement name Returns: 0 – measurement does not exist 1 – measurement exists
int Measurement_Id (char* toolName, char* measurementName)	Gets the measurement ID by the measurement name. Parameters: toolName – Tool name measurementName – Measurement name Returns: -1 – measurement does not exist Other value – Measurement ID

Output Functions

Function	Description
void Output_Set (double value, int decision)	Sets the output value and decision on Output index 0. Only the last output value / decision in a script run is kept and passed to the Gocator output. To output an invalid value, the constant INVALID_VALUE can be used (e.g., Output_SetAt(0, INVALID_VALUE, 0))

Function	Description
	Parameters: value - value output by the script decision - decision value output by the script. Can only be 0 or 1
void Output_SetAt(unsigned int index, double value, int decision)	Sets the output value and decision at the specified output index. To output an invalid value, the constant INVALID_VALUE can be used (e.g., Output_SetAt(0, INVALID_VALUE, 0)) Parameters: index – Script output index value – value output by the script decision – decision value output by the script. Can only be 0 or 1
void Output_SetId(int id, double value, int decision)	Sets the output value and decision at the specified script output ID. To output an invalid value, the constant INVALID_VALUE can be used (e.g., Output_SetId(0, INVALID_VALUE, 0)) Parameters: id – Script output ID

Memory Functions

Function	Description
void Memory_Set64s (int id, long long value)	Stores a 64-bit signed integer in persistent memory. Parameters: id - ID of the value value - Value to store
long long Memory_Get64s (int id)	Loads a 64-bit signed integer from persistent memory. Parameters: id - ID of the value Returns: value - Value stored in persistent memory
void Memory_Set64u (int id, unsigned long long value)	Stores a 64-bit unsigned integer in the persistent memory Parameters: id - ID of the value value - Value to store
unsigned long long Memory_Get64u (int id)	Loads a 64-bit unsigned integer from persistent memory. Parameters: id - ID of the value Returns: value - Value stored in persistent memory
void Memory_Set64f (int id, double value)	Stores a 64-bit double into persistent memory. Parameters:

Function	Description
	id - ID of the value
	value - Value to store
double Memory_Get64f (int id)	Loads a 64-bit double from persistent memory. All persistent memory values are set to 0 when the sensor starts.
	Parameters:
	id - ID of the value
	Returns:
	value - Value stored in persistent memory
int Memory_Exists (int id)	Tests for the existence of a value by ID.
	Parameters:
	id – Value ID
	Returns:
	0 – value does not exist
	1 – value exists
void Memory_Clear (int id)	Erases a value associated with an ID.
	Parameters:
	id – Value ID
void Memory_ClearAll()	Erases all values from persistent memory

Stamp Functions

Function	Description
long long Stamp_Frame()	Gets the frame index of the current frame.
long long Stamp_Time()	Gets the time stamp of the current frame.
long long Stamp_Encoder()	Gets the encoder position of the current frame.
long long Stamp_EncoderZ()	Gets the encoder index position of the current frame.
unsigned int Stamp_Inputs()	Gets the digital input state of the current frame.

Math Functions

Function	Description
float sqrt(float x)	Calculates square root of x
float sin(float x)	Calculates sin(x) (x in radians)
float cos(float x)	Calculates cos(x) (x in radians)
float tan(float x)	Calculates tan(x) (x in radians)
float asin(float x)	Calculates asin(x) (x in radians)
float acos(float x)	Calculates acos(x) (x in radians)
float atan(float x)	Calculates atan(x) (x in radians)
float pow (float x, float y)	Calculates the exponential value. x is the base, y is the exponent
float fabs(float x)	Calculates the absolute value of x

Example: Accumulated Volume

The following example shows how to create a custom measurement that is based on the values from other measurements and persistent values. The example calculates the volume of the target using a series of box area measurement values.

```
/* Calculate the volume of an object by accumulating the boxArea measurements*/
/* Encoder Resolution is 0.5mm. */
/* BoxArea Measurement ID is set to 1*/

long long encoder_res = 500;
long long Volume = Memory_Get64s(0);

Memory_Set64s(0, Volume);
if (Volume > 1000000)
{
   Output_Set(Volume, 1);
}
else
{
   Output_Set(Volume, 0);
}
```


Output

The following sections describe the **Output** page.

Output Page Overview

Output configuration tasks are performed using the **Output** page. Gocator sensors can transmit laser profiles and measurement results to various external devices using several output interface options.

> Up to two outputs can have scheduling enabled with ASCII as the Serial output protocol. When Selcom is the current Serial output protocol, only one other output can have scheduling enabled.

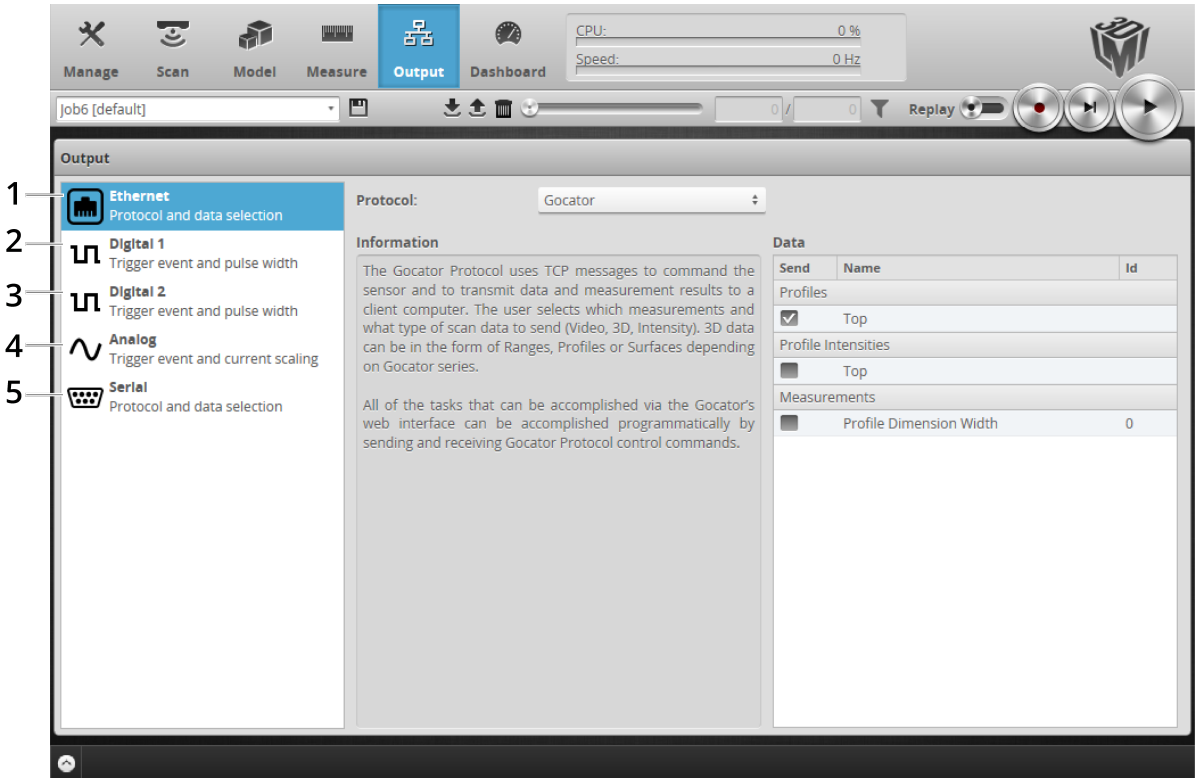


	Category	Description
1	Ethernet	Used to select the data sources that will transmit data via Ethernet. See *Ethernet Output* on the next page.
2	Digital Output 1	Used to select the data sources that will be combined to produce a digital output pulse on Output 1. See *Digital Output* on page 233.
3	Digital Output 2	Used to select the data sources that will be combined to produce a digital output pulse on Output 2. See *Digital Output* on page 233.
4	Analog Panel	Used to convert a measurement value or decision into an analog output signal. See *Analog Output* on page 236.
5	Serial Panel	Used to select the measurements that will be transmitted via RS-485 serial output. See *Serial Output* on page 238.

Ethernet Output

A sensor uses TCP messages (Gocator protocol) to receive commands from client computers, and to send video, laser profile, intensity, and measurement results to client computers. The sensor can also receive commands from and send measurement results to a PLC using ASCII, Modbus TCP, or EtherNet/IP protocol. See *Protocols* on page 326 for the specification of these protocols.

The specific protocols used with Ethernet output are selected and configured within the panel.

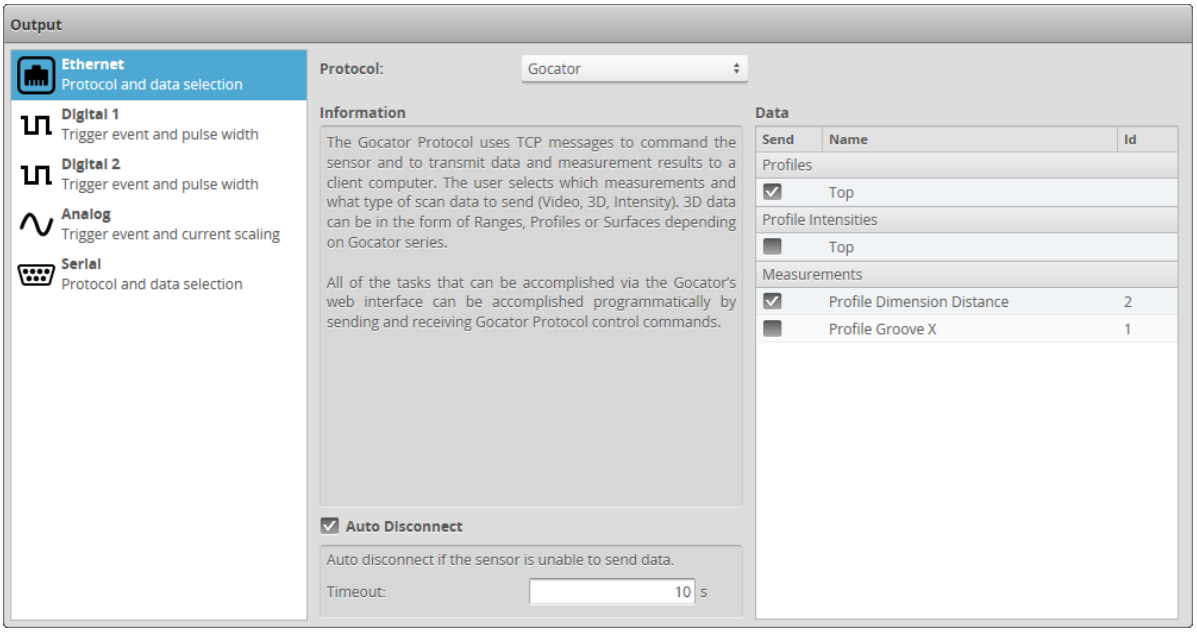


To receive commands and send results using Gocator Protocol messages:

1. Go to the **Output** page.
2. Click on the **Ethernet** category in the **Output** panel.
3. Select **Gocator** as the protocol in the **Protocol** drop-down.
4. Check the video, profile, intensity, or measurement items to send.
5. (Optional) Uncheck the Auto Disconnect setting.
   By default, this setting is checked, and the timeout is set to 10 seconds.


> Measurements shown here correspond to measurements that have been added using the **Measure** page (see on page 148).

All of the tasks that can be accomplished with the Gocator's web interface (creating jobs, performing alignment, sending data and health information, and software triggering, etc.) can be accomplished programmatically by sending Gocator protocol control commands.

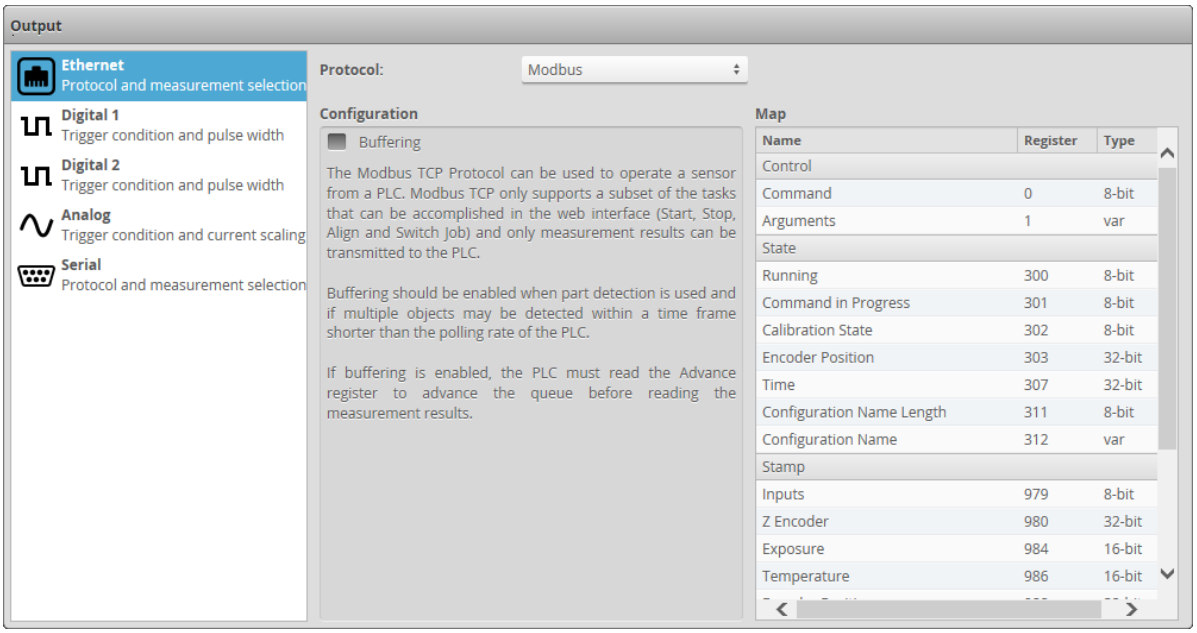


To receive commands and send results using Modbus TCP messages:

1. Go to the **Output** page.
2. Click on **Ethernet** in the **Output** panel.
3. Select **Modbus** as the protocol in the **Protocol** drop-down.
   Unlike the Gocator Protocol, you do not select which measurement items to output. The Ethernet panel will list the register addresses that are used for Modbus TCP communication.
   The Modbus TCP protocol can be used to operate a sensor. Modbus TCP only supports a subset of the tasks that can be performed in the web interface. A sensor can only process Modbus TCP commands when Modbus is selected in the **Protocol** drop-down.
4. Check the **Buffering** checkbox, if needed.
   Buffering is needed, for example, in Surface mode if multiple objects are detected within a time frame shorter than the polling rate of the PLC.
   If buffering is enabled with the Modbus protocol, the PLC must read the Advance register to advance the queue before reading the measurement results.

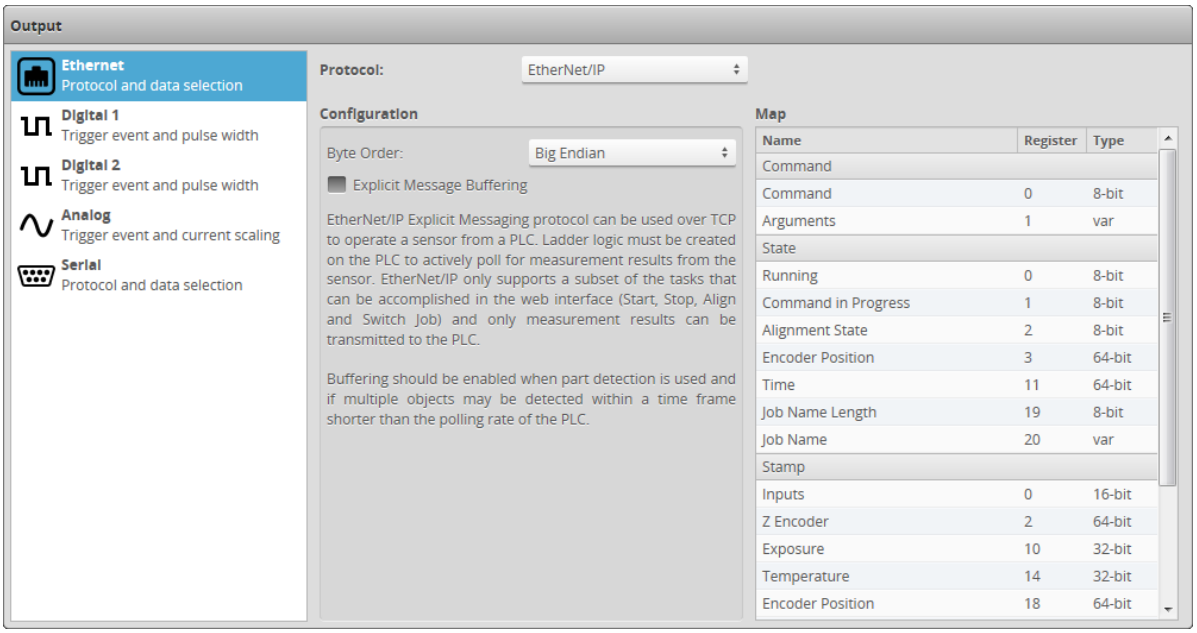

To receive commands and send results using EtherNet/IP messages:

1. Go to the **Output** page.
2. Click on **Ethernet** in the **Output** panel.
3. Select **EtherNet/IP** in the **Protocol** option.
   Unlike using the Gocator Protocol, you don't select which measurement items to output. The **Ethernet** panel will list the register addresses that are used for EtherNet/IP messages communication.
   The EtherNet/IP protocol can be used to operate a sensor. EtherNet/IP only supports a subset of the tasks that can be accomplished in the web interface. A sensor can only process EtherNet/IP commands when the EtherNet/IP is selected in the **Protocol** option.
4. Check the **Explicit Message Buffering** checkbox, if needed.
   Buffering is needed, for example, in Surface mode if multiple objects are detected within a time frame shorter than the polling rate of the PLC. If buffering is enabled with the EtherNet/IP protocol, the buffer is automatically advanced when the Sample State Assembly Object (see on page 386) is read.
5. Choose the byte order in the **Byte Order** dropdown.

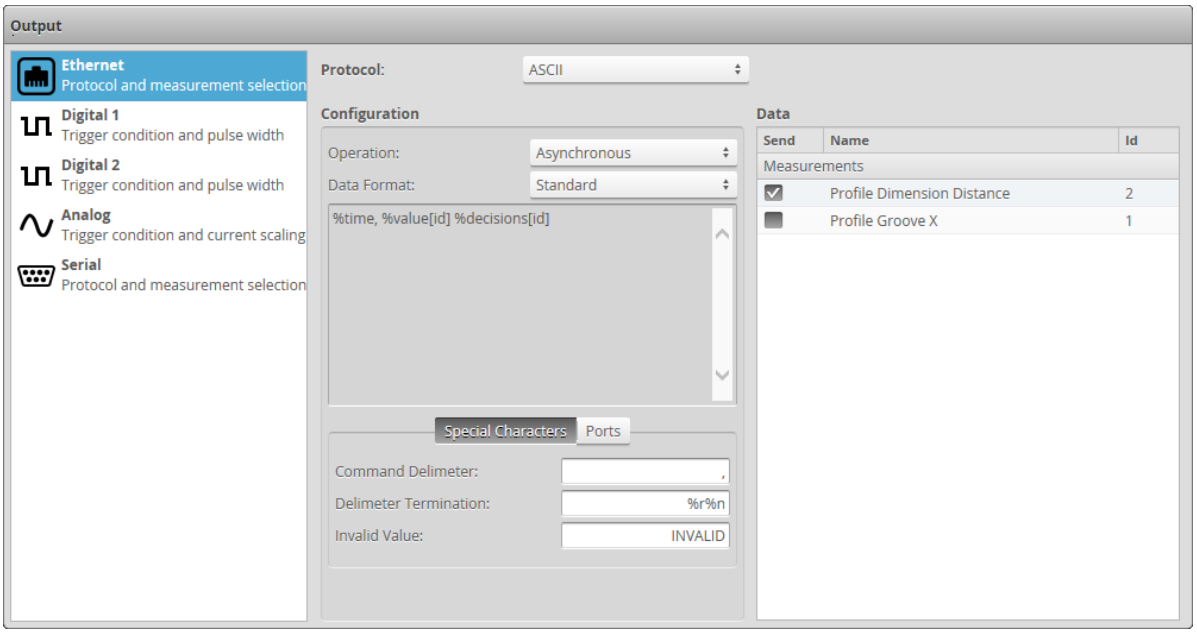

To receive commands and send results using ASCII messages:

1. Go to the **Output** page.
2. Click on **Ethernet** in the **Output** panel.
3. Select **ASCII** as the protocol in the **Protocol** drop-down.
4. Set the operation mode in the **Operation** drop-down.
   In asynchronous mode, the data results are transmitted when they are available. In polling mode, users send commands on the data channel to request the latest result. See *Polling Operation Commands (Ethernet Only)* on page 389 for an explanation of the operation modes.
5. Select the data format from the **Data Format** drop-down.
   Select **Standard** to use the default result format of the ASCII protocol. Select the measurement to send by placing a check in the corresponding checkbox. See *Standard Result Format* on page 396 for an explanation of the standard result mode.
   Select **Custom** to enable the custom format editor, and then use the replacement patterns listed in **Replacement Patterns** to create a custom format in the editor.
6. Set the special characters in the **Special Characters** tab.
   Set the command delimiter, delimiter termination, and invalid value characters. Special characters are used in commands and standard-format data results.
7. Set the TCP ports in the **Ports** tab.
   Select the TCP ports for the control, data, and health channels. If the port numbers of two channels are the same, the messages for both channels are transmitted on the same port.

Digital Output

Gocator sensors can convert measurement decisions or software commands to digital output pulses, which can then be used to output to a PLC or to control external devices, such as indicator lights or air


ejectors.

A digital output can act as a measurement valid signal to allow external devices to synchronize to the timing at which measurement results are output. In this mode, the sensor outputs a digital pulse when a measurement result is ready.

A digital output can also act as a strobe signal to allow external devices to synchronize to the timing at which the sensor exposes. In this mode, the sensor outputs a digital pulse when the sensor exposes.

Each sensor supports two digital output channels. See *Gocator Power/LAN Connector* on page 463 for information on wiring digital outputs to external devices.

Trigger conditions and pulse width are then configured within the panel.

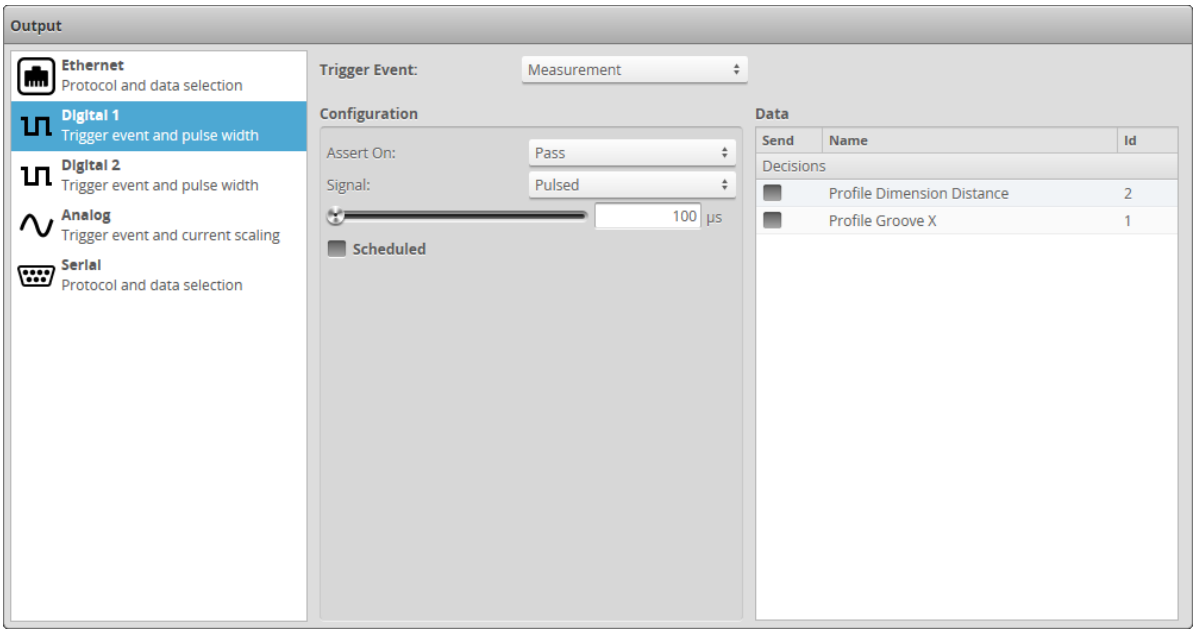

To output measurement decisions:

1. Go to the **Output** page.
2. Click on **Digital 1** or **Digital 2** in the **Output** panel.
3. Set **Trigger Event** to **Measurement**.
4. In **Configuration**, set **Assert On** and select the measurements that should be combined to determine the output.
   If multiple measurement decisions are selected and **Assert On** is set to **Pass**, the output is activated when all selected measurements pass.
   If **Assert On** is set to **Fail**, the output is activated when any one of the selected measurements fails.
5. Set the **Signal** option.
   The signal type specifies whether the digital output is a continuous signal or a pulsed signal. If **Signal** is set to **Continuous**, the signal state is maintained until the next transition occurs. If **Signal** is set to is **Pulsed**, you must specify the pulse width and how it is scheduled.

6. Specify a pulse width using the slider.
   The pulse width is the duration of the digital output pulse, in microseconds.
7. Specify whether the output is immediate or scheduled.
   Check the **Scheduled** option if the output needs to be scheduled.
   A scheduled output becomes active after a specified delay from the start of Gocator exposure. A scheduled output can be used to track the decisions for multiple objects as these objects travel from the sensor to the eject gates. The **Delay** setting specifies the distance from the sensor to the eject gates.
   An immediate output becomes active as soon as measurement results are available. The output activates after the sensor finishes processing the data. As a result, the time between the start of sensor exposure and output activates can vary and is dependent on the processing latency. The latency is reported in the dashboard and in the health messages.
8. Specify a delay.
   The delay specifies the time or spatial location between the start of sensor exposure and when the output becomes active. The delay should be larger than the time needed to process the data inside the sensor. It should be set to a value that is larger than the processing latency reported in the dashboard or in the health messages.
   The unit of the delay is configured with the **Delay Domain** setting.

To output a measurement valid signal:

1. Go to the **Output** page.
2. Click on **Digital 1** or **Digital 2** in the **Output** panel.
3. Set **Trigger Event** to **Measurement**.
4. In **Configuration**, set **Assert On** to **Always**.
5. Select the measurements.
   The output activates when the selected decisions produce results. The output activates only once for each frame even if multiple decision sources are selected.
6. Specify a pulse width using the slider.
   The pulse width determines the duration of the digital output pulse, in microseconds.

To respond to software scheduled commands:

1. Go to the **Output** page.
2. Click on **Digital 1** or **Digital 2** in the **Output** panel.
3. Set **Trigger Event** to **Software**.
4. Specify a **Signal** type.
   The signal type specifies whether the digital output is a continuous signal or a pulsed signal. If the signal is continuous, its state is maintained until the next transition occurs. If the signal is pulsed, user specifies the pulse width and the delay.

5. Specify a **Pulse Width**.
   The pulse width determines the duration of the digital output pulse, in microseconds.
6. Specify if the output is **Immediate** or **Scheduled**.
   A pulsed signal can become active immediately or scheduled. Continuous signal always becomes active immediately.
   Immediate output becomes active as soon as a scheduled digital output (see on page 346) is received.
   Scheduled output becomes active at a specific target time or position, given by the Scheduled Digital Output command. Commands that schedule event in the past will be ignored. An encoder value is in the future if the value will be reached by moving in the forward direction (the direction that encoder calibration was performed in).

To output an exposure signal:

1. Go to the **Output** page.
2. Click on **Digital 1** or **Digital 2** in the **Output** panel.
3. Set **Trigger Event** to **Exposure Begin** or **Exposure End**.
4. Set the **Pulse Width** option.
   The pulse width determines the duration of the digital output pulse, in microseconds.


To output an alignment signal:

1. Go to the **Output** page.
2. Click on **Digital 1** or **Digital 2** in the **Output** panel.
3. Set **Trigger Event** to **Alignment**.
   The digital output state is High if the sensor is aligned, and Low if not aligned. Whether the sensor is running does not affect the output.

Analog Output

Gocator sensors can convert a measurement result or software request to an analog output. Each sensor supports one analog output channel.

See *Analog Output* on page 468 for information on wiring analog output to an external device.

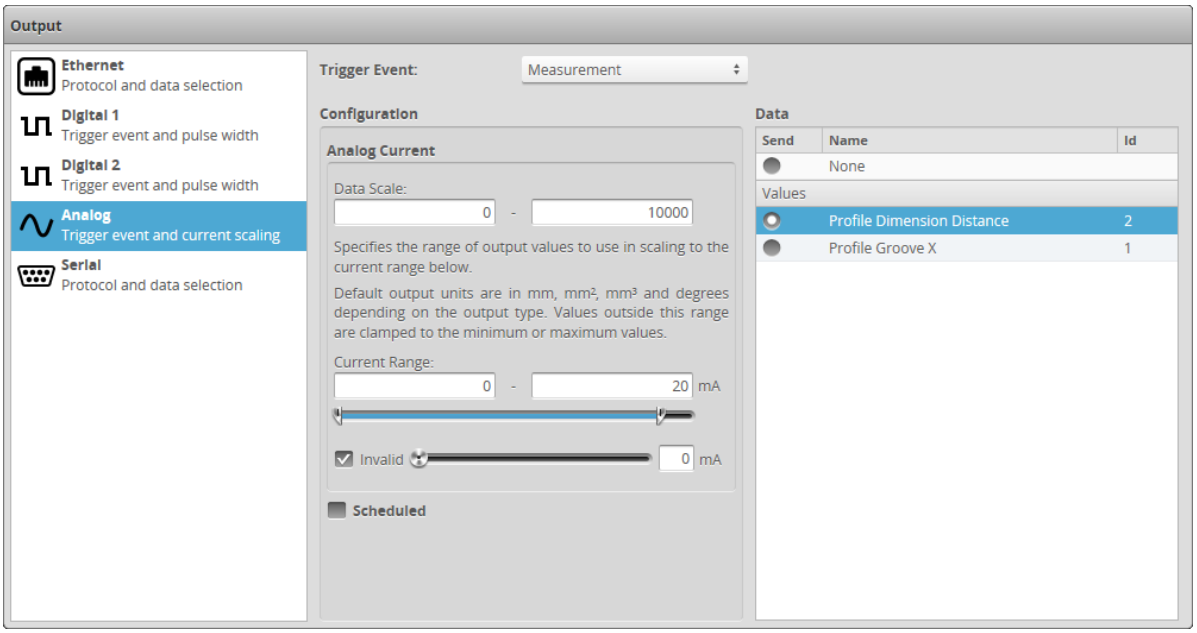

To output measurement value or decision:

1. Go to the **Output** page.
2. Click on **Analog** in the **Output** panel.
3. Set **Trigger Event** to **Measurement**.
4. Select the measurement that should be used for output.
   Only one measurement can be used for analog output. Measurements shown here correspond to measurements that have been programmed using the **Measurements** page.
5. Specify **Data Scale** values.
   The values specified here determine how measurement values are scaled to the minimum and maximum current output. The **Data Scale** values are specified in millimeters for dimensional measurements such as distance, square millimeters for areas, cubic millimeters for volumes, and degrees for angle results.
6. Specify **Current Range** and **Invalid** current values.
   The values specified here determine the minimum and maximum current values in milliamperes. If **Invalid** is checked, the current value specified with the slider is used when a measurement value is not valid. If **Invalid** is not checked, the output holds the last value when a measurement value is not valid.
7. Specify if the output is immediate or scheduled.
   An analog output can become active immediately or scheduled. Check the **Scheduled** option if the output needs to be scheduled.
   A scheduled output becomes active after a specified delay from the start of Gocator exposure. A scheduled output can be used to track the decisions for multiple objects as these objects travel from the sensor to the eject gates. The delay specifies the distance from the sensor to the eject gates.
   An Immediate output becomes active as soon as the measurement results are available. The output activates after the Gocator finishes processing the data. As a result, the time between the start of

Gocator exposure and output activates depends on the processing latency. The latency is reported in the dashboard and in the health messages.

8. Specify a delay.
   The delay specifies the time or spatial location between the start of Gocator exposure and the output becomes active. The delay should be larger than the time needed to process the data inside the Gocator. It should be set to a value that is larger than the processing latency reported in the dashboard and in the health messages.
   The unit of the delay is configured in the trigger panel. See *Triggers* on page 83 for details.

> The analog output takes about 75 us to reach 90% of the target value for a maximum change, then another ~40 us to settle completely.

To respond to software scheduled commands:

1. Go to the **Output** page.
2. Click on **Analog** in the **Output** panel.
3. Set **Trigger Event** to **Software**.
4. Specify if the output is immediate or scheduled.
   An analog output value becomes active immediately or scheduled. Immediate output becomes active as soon as a Scheduled Analog Output command (see on page 347) is received.
   Software scheduled command can schedule an analog value to output at a specified future time or encoder value, or changes its state immediately. The Delay setting in the panel is ignored. Commands that schedule event in the past will be ignored. An encoder value is in future if the value will be reached by moving in the forward direction (the direction that encoder calibration was performed in).

Serial Output


The Gocator's web interface can be used to select measurements to be transmitted via RS-485 serial output. Each sensor has one serial output channel.

Two protocols are supported: ASCII Protocol and Selcom Serial Protocol.

The ASCII protocol outputs data asynchronously using a single serial port. For information on the ASCII Protocol parameters and data formats, see *ASCII Protocol* on page 388.


The Selcom Serial Protocol outputs synchronized serial data using two serial ports. For information on the Selcom serial protocol and data formats, see *Selcom Protocol* on page 398.

For information on wiring serial output to an external device, see *Serial Output* on page 468.

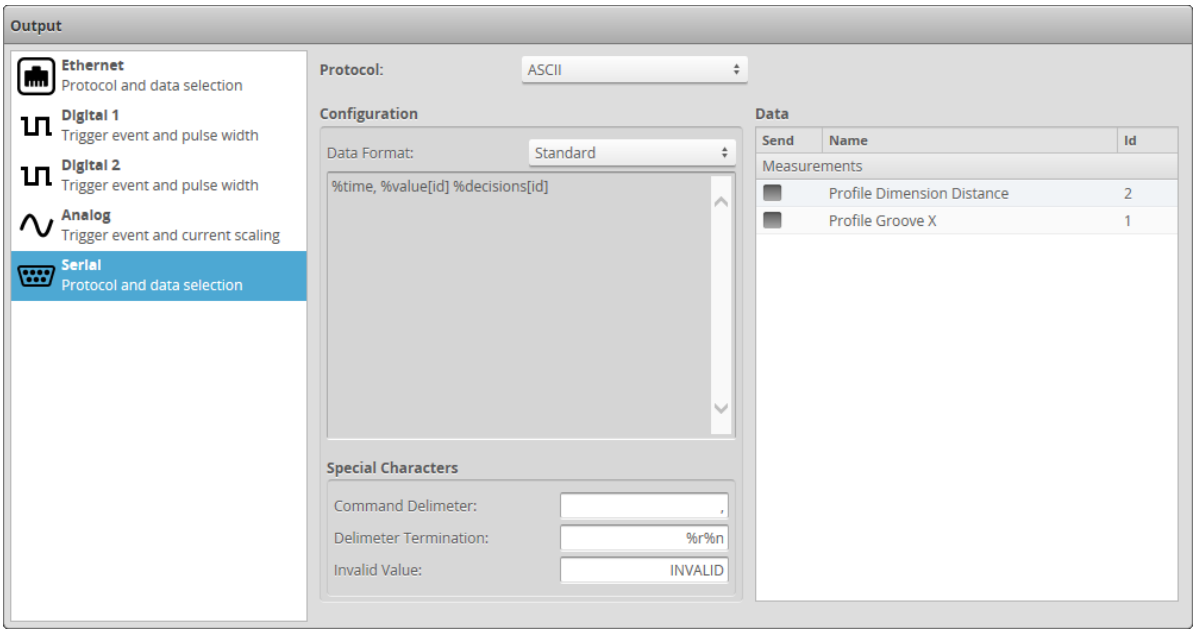

To configure ASCII output:

1. Go to the **Output** page.
2. Click on **Serial** in the **Output** panel.
3. Select **ASCII** in the **Protocol** option.
4. Select the **Data Format**.
   Select **Standard** to use the default result format of the ASCII protocol. Select value and decision to send by placing a check in the corresponding check box. See *Standard Result Format* on page 396 for an explanation of the standard result mode.
   Select **Custom** to customize the output result. A data format box will appear in which you can type the format string. See *Custom Result Format* on page 397 for the supported format string syntax.
5. Select the measurments to send.
   Select measurements by placing a check in the corresponding check box.
6. Set the **Special Characters**.
   Select the delimiter, termination and invalid value characters. Special characters are used in commands and standard-format data results.

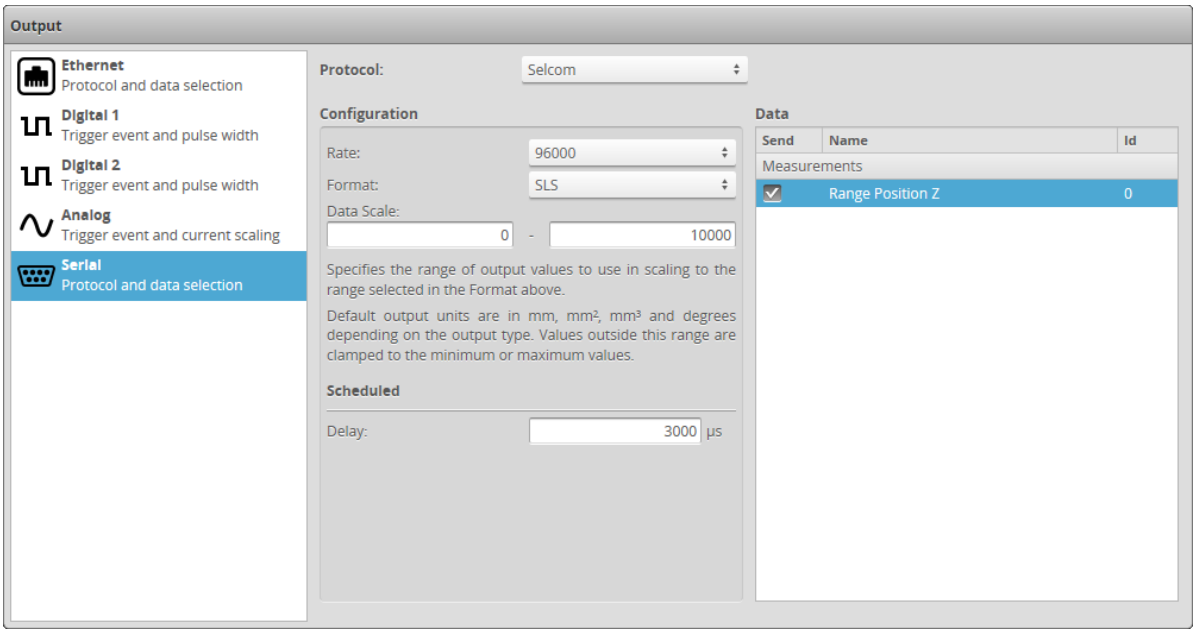

To configure Selcom output:


1. Go to the **Output** page.
2. Click on **Serial** in the **Output** panel.
3. Select **Selcom** in the **Protocol** option.
4. Select the measurements to send.
   To select an item for transmission, place a check in the corresponding check box. Measurements shown here correspond to measurements that have been programmed using the **Measurements** page.
5. Select the baud rate in **Rate**.
6. Select the **Data Format**.
   See *Selcom Protocol* on page 398 for definitions of the formats.
7. Specify **Data Scale** values.
   The **Data Scale** values are specified in millimeters for dimensional measurements such as distance, square millimeters for areas, cubic millimeters for volumes, and degrees for angle results.
   The results are scaled according to the number of serial bits used to cover the data scale range. For example, the 12-bit output would break a 200 mm data scale range into 4096 increments (0.0488 mm/bit), and the 14-bit output would break a 200 mm data scale range into 16384 increments (0.0122 mm/bit).
8. Set the output delay in **Delay**.

Dashboard

The following sections describe the **Dashboard** page.

Dashboard Page Overview

The **Dashboard** page summarizes sensor health information, and measurement statistics.

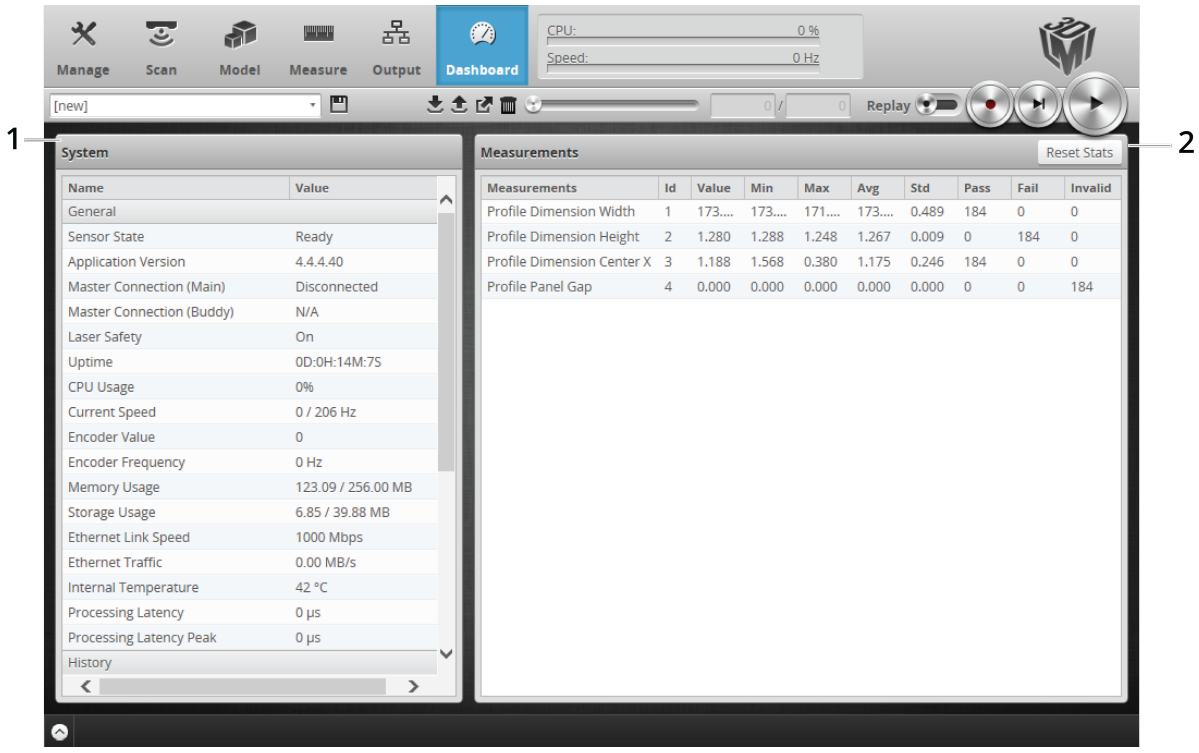

	Element	Description
1	System	Displays sensor state and health information. See *System Panel* below.
2	Measurements	Displays measurement statistics. See *Measurements* on the next page.

System Panel

The following state and health information is available in the **System** panel on the **Dashboard** page:

Dashboard General System Values

Name	Description
Sensor State	Current sensor state (Ready or Running).
Application Version	Gocator firmware version.
Master Connection	Whether Master is connected.
Laser Safety	Whether Laser Safety is enabled.
Uptime	Length of time since the sensor was power-cycled or reset.

Name	Description
CPU Usage	Sensor CPU utilization (%).
Encoder Value	Current encoder value (ticks).
Encoder Frequency	Current encoder frequency (Hz).
Memory Usage	Sensor memory utilization (MB used / MB total available).
Storage Usage	Sensor flash storage utilization (MB used / MB total available).
Temperature	Sensor internal temperature (C).
Ethernet Link Speed	Speed of the Ethernet link (Mbps).
Ethernet Traffic	Network output utilization (MB/sec).
Internal Temperature	Internal sensor temperature.
Processing Latency	Last delay from camera exposure to when results can be scheduled to.
Processing Latency Peak	Peak latency delay from camera exposure to when results can be scheduled to Rich I/O. Reset on start.

Dashboard History Values

Name	Description
Scan Count	Number of scans performed since sensor state last changed to Running.
Trigger Drop	Count of camera frames dropped due to excessive trigger speed.
Analog Output Drop	Count of analog output drops because last output has not been completed.
Digital Output Drop	Count of digital output drops because last output has not been completed.
Serial Output Drop	Count of serial output drops because last output has not been completed.
Processing Drop	Count of frame drops due to excessive CPU utilization.
Ethernet Drop	Count of frame drops due to slow Ethernet link.
Digital Output High Count	Count of high states on digital outputs.
Digital Output Low Count	Count of low states on digital outputs.
Range Valid Count	Count of valid ranges.
Range Invalid Count	Count of invalid ranges.
Anchor Invalid Count	Count of invalid anchors.
Valid Spot Count	Count of valid spots detected in the last frame.
Max Spot Count	Maximum number of spots detected since sensor was started.
Camera Search Count	Count of camera frame where laser has lost tracked. Only applicable when tracking window is enabled.

Measurements

Measurement statistics are displayed for each measurement that has been configured on the **Measure** page. Use the **Reset** button to reset the statistics.

The following information is available for each measurement:


Dashboard Measurement Statistics

Name	Description
Measurements	The measurement ID and name.
Value	The most recent measurement value.
Min/Max	The minimum and maximum measurement values that have been observed.
Avg	The average of all measurement results collected since the sensor was started.
Std	The standard deviation of all measurement results collected since the sensor was started.
Pass/Fail	The counts of pass or fail decisions that have been generated.
Invalid	The count of frames from which no feature points could be extracted.

Gocator Emulator

The Gocator emulator is a stand-alone application that lets you run a "virtual" sensor. In a virtual sensor, you can test jobs, evaluate data, and even learn more about new features, rather than take a physical device off the production line to do this. You can also use a virtual sensor to familiarize yourself with the overall interface if you are new to Gocator.

> The Gocator emulator is only supported on Windows 7, 8, and 10.

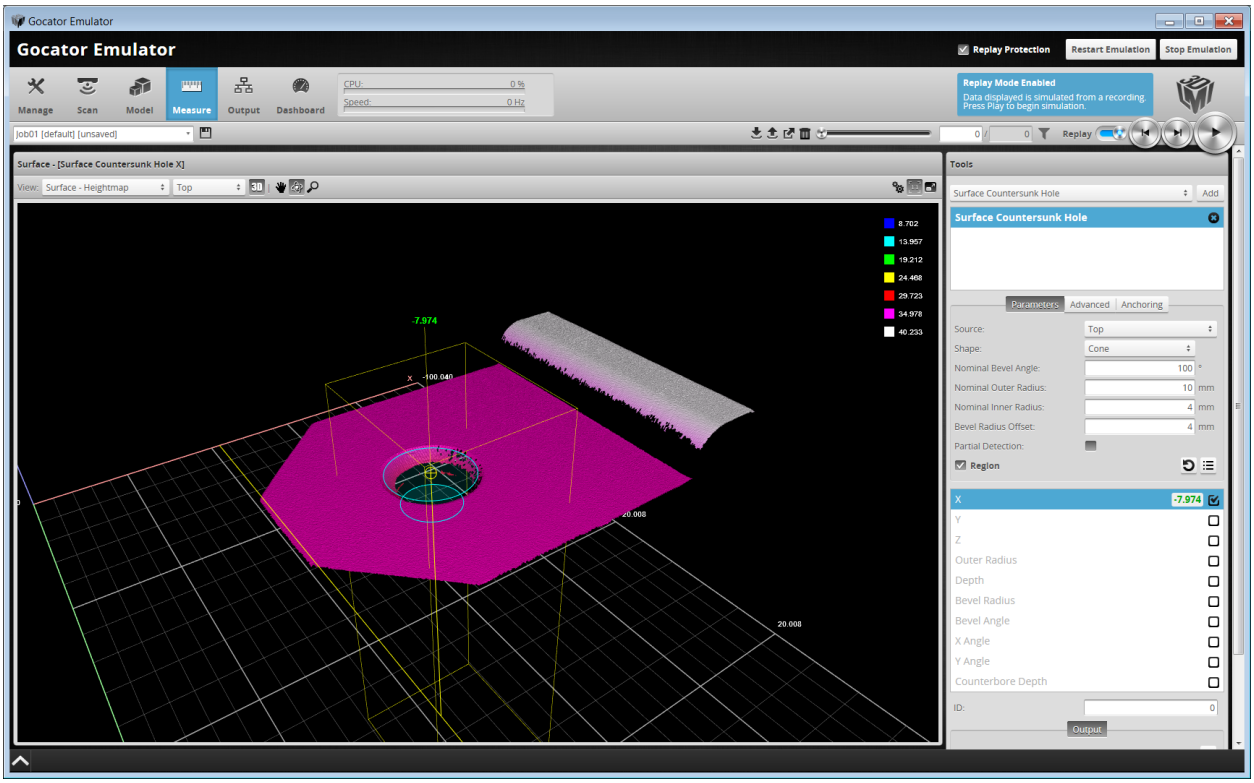

Emulator showing a part in recorded data.
A measurement is applied to the recorded data.

Limitations

In most ways, the emulator behaves like a real sensor, especially when visualizing data, setting up models and part matching, and adding and configuring measurement tools. The following are some of the limitations of the emulator:

- Changes to job files in the emulator are *not* persistent (they are lost when you close or restart the emulator). However, you can keep modified jobs by first saving them and then downloading them from the **Jobs** list on the **Manage** page to a client computer. The job files can then be loaded into the emulator at a later time or even onto a physical sensor for final testing.
- Performing alignment in the emulator has no effect and will never complete.
- Only one instance can be run at a time.

For information on saving and loading jobs in the emulator, see *Creating, Saving, and Loading Jobs* on page 249 .


For information on uploading and downloading jobs between the emulator and a computer, and performing other job file management tasks, see *Downloading and Uploading Jobs* on page 253.

Downloading a Support File

The emulator is provided with several virtual sensors preinstalled.

You can also create virtual sensors yourself by downloading a support file from a physical Gocator and then adding it to the emulator.

Support files can contain jobs, letting you configure systems and add measurements in an emulated sensor. Support files can also contain replay data, letting you test measurements and some configurations on real data. Dual-sensor systems are supported.

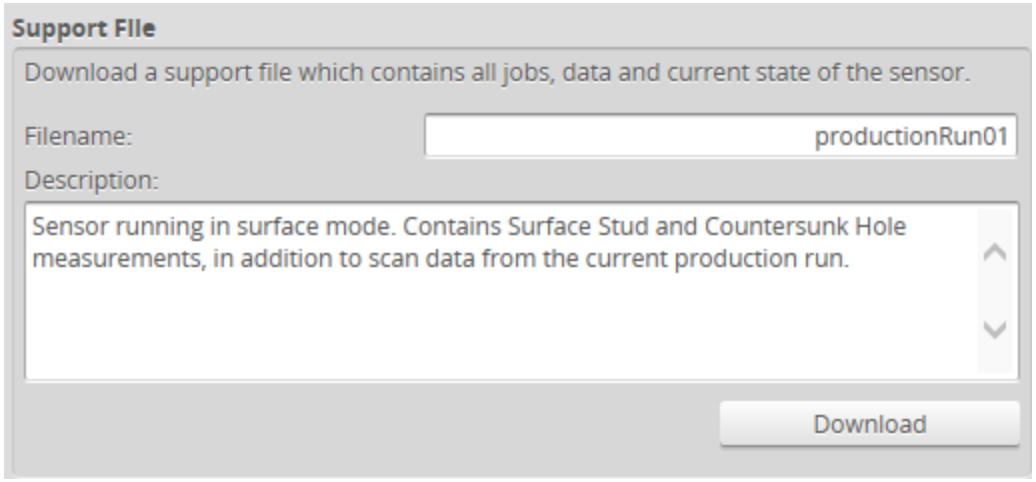

To download a support file:

1. Go to the **Manage** page and click on the **Support** category.
2. In **Filename**, type the name you want to use for the support file.

   When you create a scenario from a support file in the emulator, the filename you provide here is displayed in the emulator's scenario list.

   Support files end with the .gs extension, but you do not need to type the extension in **Filename**.
3. (Optional) In **Description**, type a description of the support file.


   When you create a scenario from a support file in the emulator, the description is displayed below the emulator's scenario list.
4. Click **Download**, and then when prompted, click **Save**.

Running the Emulator

The emulator is contained in the Gocator tools package (14405-x.x.x.x_SOFTWARE_GO_Tools.zip). You can download the package by going to http://lmi3d.com/support/downloads/, selecting a product type,

and clicking on the *Product User Area* link.

To run the emulator, unzip the package and double-click on *\Emulator\bin\win32\GoEmulator.exe*.

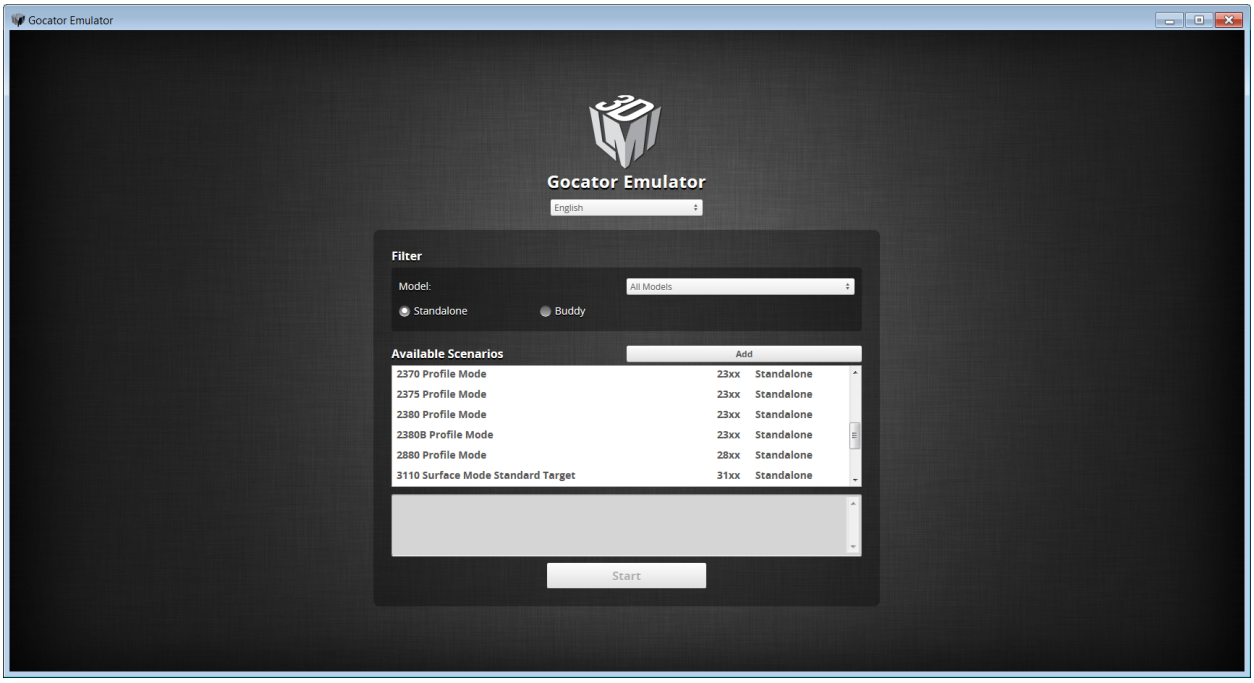

Emulator launch screen

You can change the language of the emulator's interface from the launch screen. To change the language, choose a language option from the top drop-down:



Selecting the emulator interface language

Adding a Scenario to the Emulator

To simulate a physical sensor using a support file downloaded from a sensor, you must add it as a scenario in the emulator.

> You can add support files downloaded from any series of Gocator sensors to the emulator.


To add a scenario:

1. Launch the emulator if it isn't running already.

2. Click the **Add** button and choose a previously saved support file (.gs extension) in the **Choose File to Upload** dialog.




3. (Optional) In **Description**, type a description.

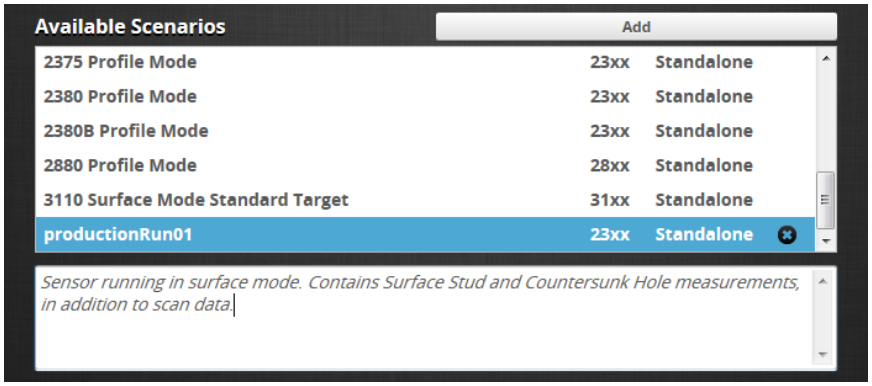

> You can only add descriptions for user-added scenarios.

Running a Scenario

After you have added a virtual sensor by uploading a support file to the emulator, you can run it from the **Available Scenarios** list on the emulator launch screen. You can also run any of the scenarios included in the installation.

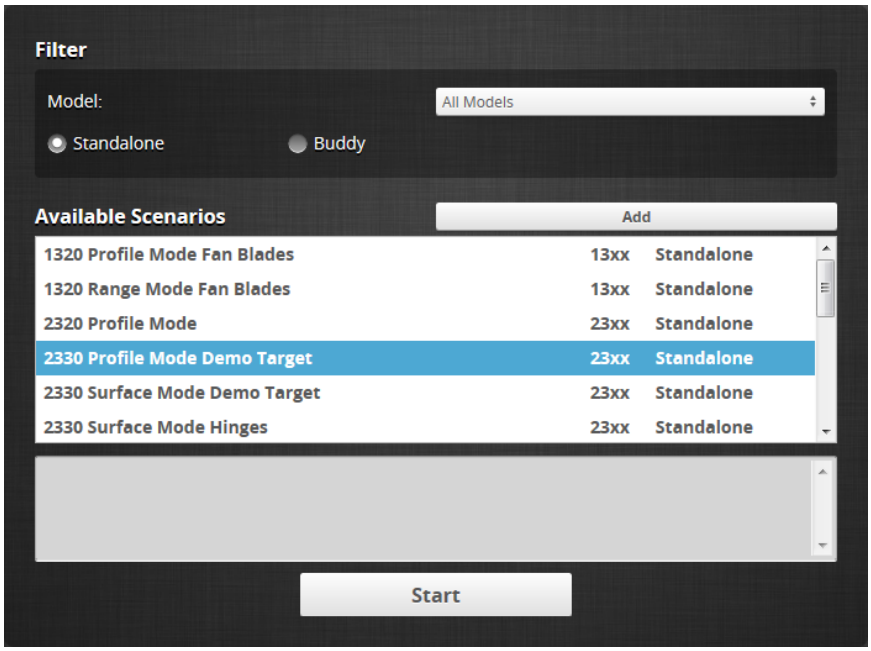

To run a scenario:

1. If you want to filter the scenarios listed in **Available Scenarios**, do one or both of the following:

- Choose a model family in the **Model** drop-down.
- Choose **Standalone** or **Buddy** to limit the scenarios to single-sensor or dual-sensor scenarios, respectively.

2. Select a scenario in the **Available Scenarios** list and click **Start**.


Removing a Scenario from the Emulator

You can easily remove a scenario from the emulator.

> You can only remove user-added scenarios.

To remove a scenario:


1. If the emulator is running a scenario, click Stop Emulation to stop it.
2. In the **Available Scenarios** list, scroll to the scenario you want to remove.

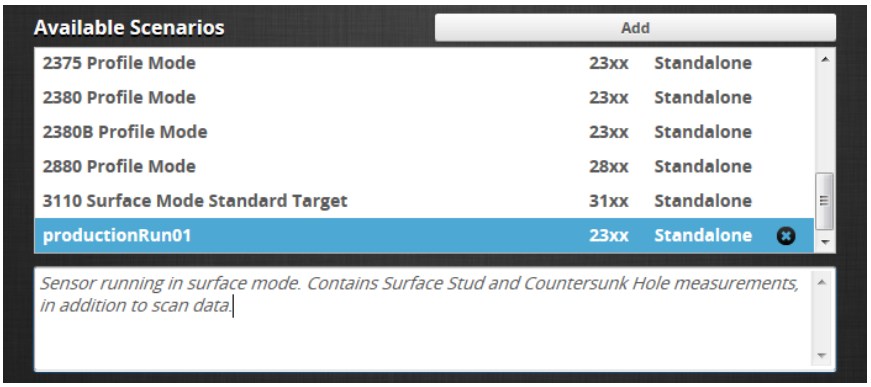

3. Click the button next to the scenario you want to remove.
   The scenario is removed from the emulator.

Using Replay Protection

Because making changes to certain settings on the **Scan** page causes the emulator to flush replay data, you can use the **Replay Protection** option to protect replay data.

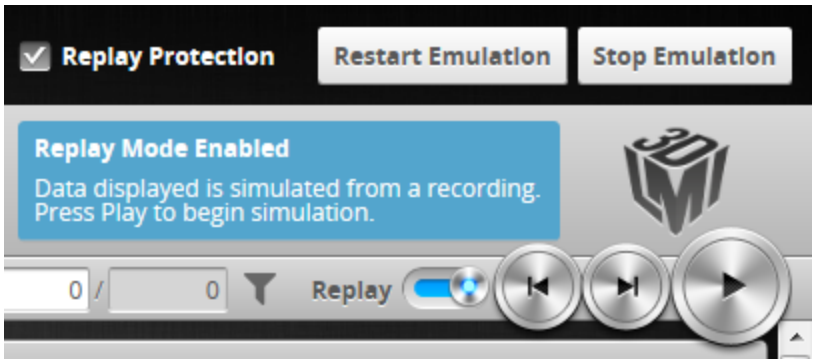


When **Replay Protection** is on, you cannot switch from Replay mode. Settings that do not affect replay data can be changed.

Replay Protection is on by default.

Stopping and Restarting the Emulator

To stop the emulator:

- Click **Stop Emulation**.



  Stopping the emulator returns you to the launch screen.

To restart the emulator when it is running:

- Click **Restart Emulation**.

  Restarting the emulator restarts the currently running simulation.

Working with Jobs and Data

The following topics describe how to work with jobs and replay data (data recorded from a physical sensor) in the emulator.

Creating, Saving, and Loading Jobs

Changes saved to job files in the emulator are *not* persistent (they are lost when you close or restart the emulator). To keep jobs permanently, you must first save the job in the emulator and then download the job file to a client computer. See below for more information on creating, saving, and switching jobs. For information on downloading and uploading jobs between the emulator and a computer, see *Downloading and Uploading Jobs* on page 253.

The job drop-down list in the toolbar shows the jobs available in the emulator. The job that is currently active is listed at the top. The job name will be marked with "[unsaved]" to indicate any unsaved changes.



To create a job:

1. Choose **[New]** in the job drop-down list and type a name for the job.
2. Click the **Save** button or press **Enter** to save the job.
   The job is saved to the emulator using the name you provided.

To save a job:

- Click the **Save** button .

  The job is saved to the emulator.

To load (switch) jobs:

- Select an existing file name in the job drop-down list.


  The job is activated. If there are any unsaved changes in the current job, you will be asked whether you want to discard those changes.

Playback and Measurement Simulation

The emulator can replay scan data previously recorded by a physical sensor, and also simulate measurement tools on recorded data. This feature is most often used for troubleshooting and fine-tuning measurements, but can also be helpful during setup.

Playback is controlled using the toolbar controls.


	Recording is not functional in the emulator.

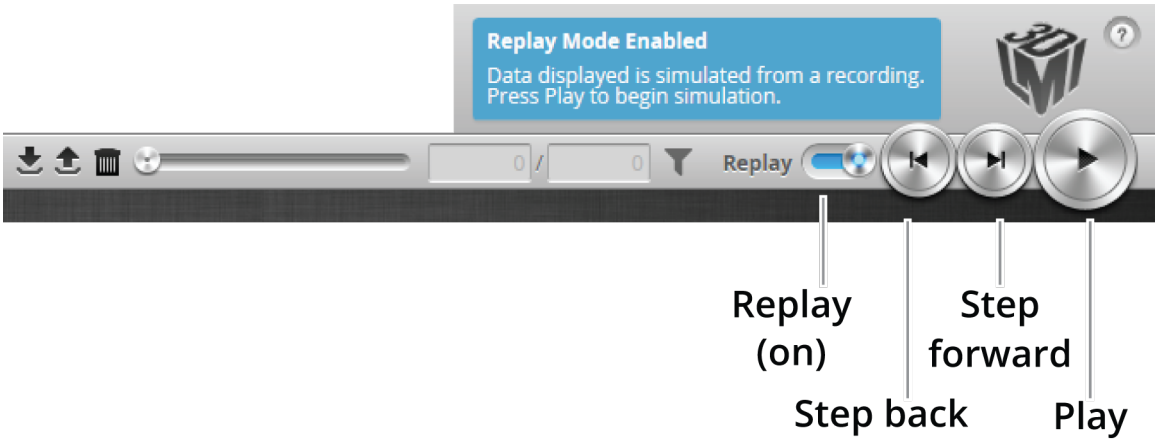

Playback controls when replay is on

To replay data:

1. Toggle **Replay** mode on by setting the slider to the right in the **Toolbar**.
   The slider's background turns blue.
   To change the mode, you must uncheck **Replay Protection**.

2. Use the **Replay** slider or the **Step Forward**, **Step Back**, or **Play** buttons to review data.
   The **Step Forward** and **Step Back** buttons move and the current replay location backward and forward by a single frame, respectively.
   The **Play** button advances the replay location continuously, animating the playback until the end of the replay data.
   The **Stop** button (replaces the **Play** button while playing) can be used to pause the replay at a particular location.
   The **Replay** slider (or **Replay Position** box) can be used to go to a specific replay frame.

To simulate measurements on replay data:

1. Toggle **Replay** mode on by setting the slider to the right in the **Toolbar**.
   The slider's background turns blue.
   To change the mode, **Replay Protection** must be unchecked.
2. Go to the **Measure** page.
   Modify settings for existing measurements, add new measurement tools, or delete measurement tools as desired. For information on adding and configuring measurements, see *Measurement* on page 148.
3. Use the **Replay Slider**, **Step Forward**, **Step Back**, or **Play** button to simulate measurements.
   Step or play through recorded data to execute the measurement tools on the recording.
   Individual measurement values can be viewed directly in the data viewer. Statistics on the measurements that have been simulated can be viewed in the **Dashboard** page; for more information on the dashboard, see *Dashboard* on page 241.

To clear replay data:


- Click the **Clear Replay Data** button .

Downloading, Uploading, and Exporting Replay Data

Replay data (recorded scan data) can be downloaded from the emulator to a client computer, or uploaded from a client computer to the emulator.

Data can also be exported from the emulator to a client computer in order to process the data using third-party tools.

> You can only upload replay data to the same sensor model that was used to create the data.

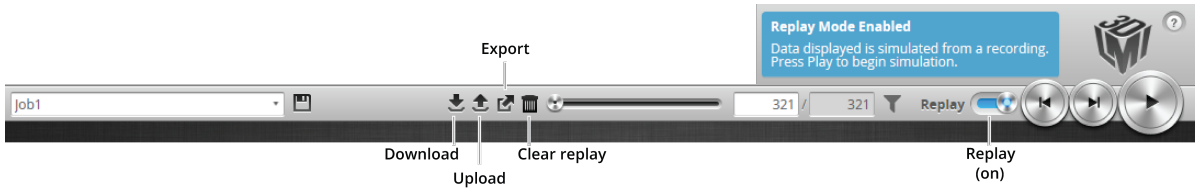


> Replay data is not loaded or saved when you load or save jobs.

To download replay data:

- Click the Download button .

To upload replay data:


1. Click the Upload button .
   If you have unsaved changes in the current job, the firmware asks whether you want to discard the changes.

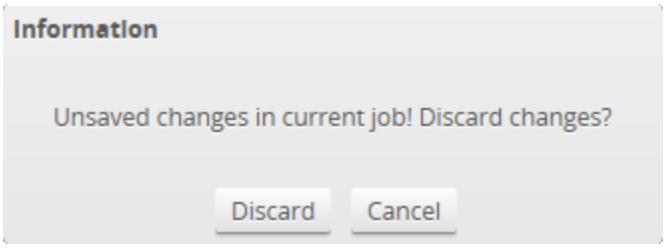

Do one of the following:

- Click **Discard** to discard any unsaved changes.

  The Upload menu appears.

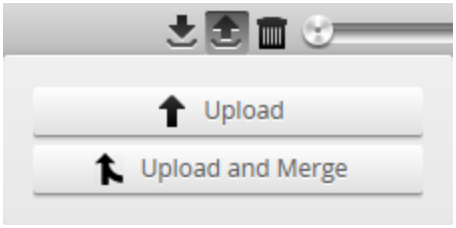


- Click **Cancel** to return to the main window to save your changes.

2. In the Upload menu, choose one of the following:
   - **Upload**: Unloads the current job and creates a new unsaved and untitled job from the content of the replay data file.
   - **Upload and merge**: Uploads the replay data and merges the data's associated job with the current job. Specifically, the settings on the **Scan** page are overwritten, but all other settings of the current job are preserved, including any measurements or models.
3. Navigate to the replay data to upload from the client computer and click **OK**.
   The replay data is loaded, and a new unsaved and untitled job is created.

Replay data can be exported using the CSV format. If you have enabled **Acquire Intensity** in the **Scan Mode** panel on the **Scan** page, the exported CSV file includes intensity data.

> *Surface* intensity data cannot be exported to the CSV format. It can only be exported separately as a bitmap.

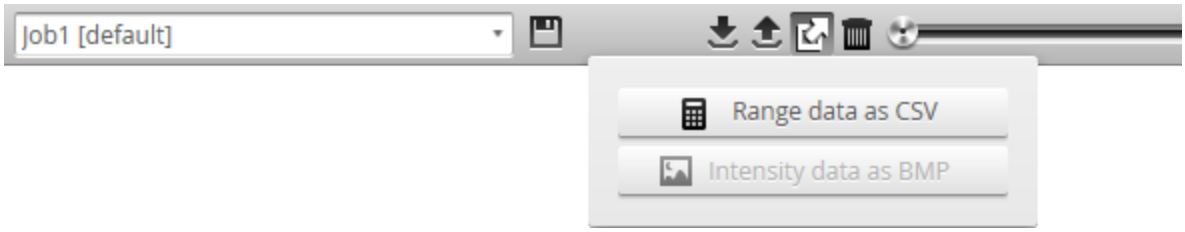

To export replay data in the CSV format:


1. Click the Export button and select **Export Range Data as CSV**.

In Profile mode, all data in the record buffer is exported. In Surface mode, only data at the current replay location is exported.
Use the playback control buttons to move to a different replay location; for information on playback, see *To replay data* in *Playback and Measurement Simulation* on page 250.

2. Optionally, convert exported data to another format using the CSV Converter Tool. For information on this tool, see *CSV Converter Tool* on page 429.

> The decision values in the exported data depend on the *current* state of the job, not the state during recording. For example, if you record data when a measurment returns a *pass* decision, change the measurement's settings so that a *fail* decision is returned, and then export to CSV, you will see a *fail* decision in the exported data.

Recorded intensity data can be exported to a bitmap (.BMP format). **Acquire Intensity** must be checked in the **Scan Mode** panel while data was being recorded in order to export intensity data.

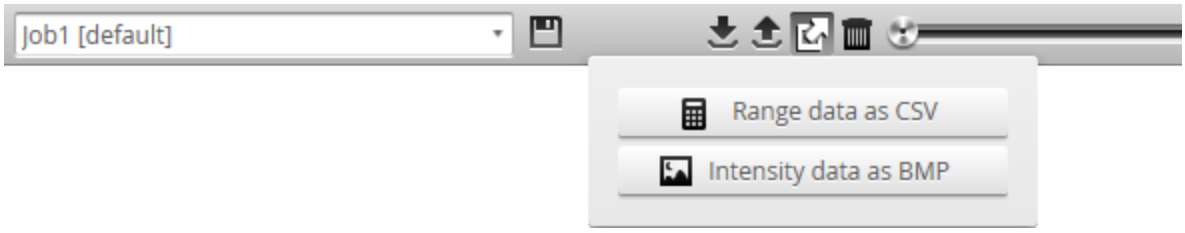


To export recorded intensity data to the BMP format:

- Click the **Export** button and select **Intensity data as BMP**.

  Only the intensity data in the current replay location is exported.
  Use the playback control buttons to move to a different replay location; for information on playback, see *To replay data* in *Playback and Measurement Simulation* on page 250.


Downloading and Uploading Jobs

The **Jobs** category on the **Manage** page lets you manage the jobs in the emulator.

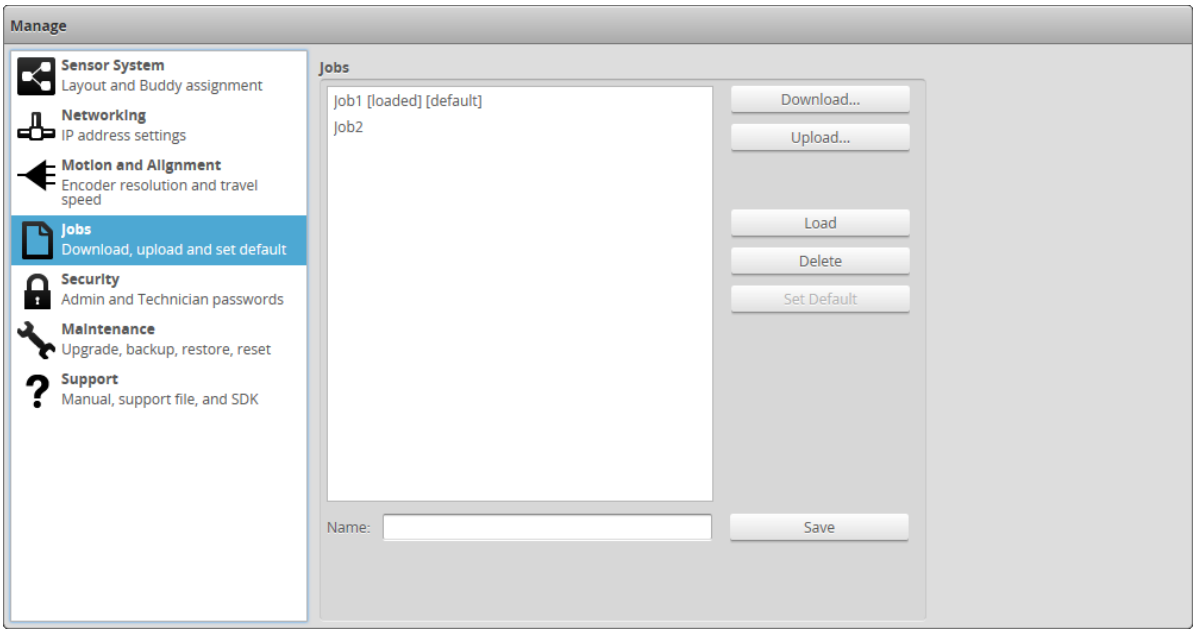

Element	Description
Name field	Used to provide a job name when saving files.
Jobs list	Displays the jobs that are currently saved in the emulator.
Save button	Saves current settings to the job using the name in the **Name** field. Changes to job files are not persistent in the emulator. To keep changes, first save changes in the job file, and then download the job file to a client computer. See the procedures below for instructions.
Load button	Loads the job that is selected in the job list. Reloading the current job discards any unsaved changes.
Delete button	Deletes the job that is selected in the job list.
Set as Default button	Setting a different job as the default is not persistent in the emulator. The job set as default when the support file (used to create a virtual sensor) was downloaded is used as the default whenever the emulator is started.
Download... button	Downloads the selected job to the client computer.
Upload... button	Uploads a job from the client computer.

Unsaved jobs are indicated by "[unsaved]".

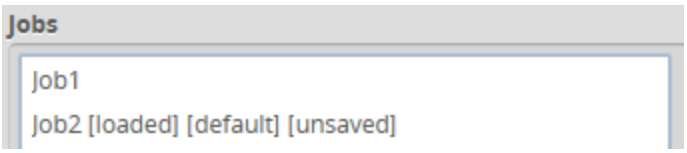

Changes to job files in the emulator are *not* persistent (they are lost when you close or restart the emulator). However, you can keep modified jobs by first saving them and then downloading them to a client computer.

To save a job:

1. Go to the **Manage** page and click on the **Jobs** category.
2. Provide a name in the **Name** field.
   To save an existing job under a different name, click on it in the **Jobs** list and then modify it in the **Name** field.
3. Click on the **Save** button or press **Enter**.

To download, load, or delete a job, or to set one as a default, or clear a default:

1. Go to the **Manage** page and click on the **Jobs** category.
2. Select a job in the **Jobs** list.
3. Click on the appropriate button for the operation.

Scan, Model, and Measurement Settings

The settings on the **Scan** page related to actual scanning will clear the buffer of any scan data that is uploaded from a client computer, or is part of a support file used to create a virtual sensor. If **Replay Protection** is checked, the emulator will indicate in the log that the setting can't be changed because the change would clear the buffer. For more information on Replay Protection, see *Using Replay Protection* on page 248.

Other settings on the **Scan** page related to the post-processing of data can be modified to test their influence on scan data, without modifying or clearing the data, for example edge filtering (page 114), and filters on the X axis (page 104). Note that modifying the Y filters causes the buffer to be cleared.

For information on creating models and setting up part matching, see *Models* on page 127. For information on adding and configuring measurement tools, see *Measurement* on page 148.

Calculating Potential Maximum Frame Rate

You can use the emulator to calculate the potential maximum frame rate you can achieve with different settings.

For example, when you reduce the active area, in the **Active Area** tab on the **Sensor** panel, the maximum frame rate displayed on the **Trigger** panel is updated to reflect the increased speed that would be available in a physical Gocator sensor. (See *Active Area* on page 88 for more information on active area.)

Similarly, you can adjust exposure on the **Exposure** tab on the **Sensor** panel to see how this affects the maximum frame rate. (See *Exposure* on page 92 for more information on exposure.)



To adjust active area in the emulator, **Replay Protection** must be turned off. See *Using Replay Protection* on page 248 for more information.



Saving changes to active area causes replay data to be flushed.

Protocol Output

The emulator simulates output for all of Gocator's Ethernet-based protocols:

- Gocator
- ASCII
- Modbus
- EtherNet/IP

To access the simulated output, connect to localhost (127.0.0.1) and use the protocols as you would with a physical sensor.

Gocator Device Files

This section describes the user-accessible device files stored on a Gocator.

Live Files

Various "live" files stored on a Gocator sensor represent the sensor's active settings and transformations (represented together as "job" files), the active replay data (if any), and the sensor log.

By changing the live job file, you can change how the sensor behaves. For example, to make settings and transformations active, write to or copy to the _live.job file. You can also save active settings or transformations to a client computer, or to a file on the sensor, by reading from or copying these files, respectively.

> The live files are stored in volatile storage. Only user-created job files are stored in non-volatile storage.

The following table lists the live files:

Live Files

Name	Read/Write	Description
_live.job	Read/Write	The active job. This file contains a Configuration component containing the current settings. If Alignment Reference in the active job is set to Dynamic, it also contains a Transform component containing transformations. For more information on job files (live and user-created), accessing their components, and their structure, see *Job Files* on the next page.
_live.cfg	Read/Write	A standalone representation of the Configuration component contained in _live.job. Used primarily for backwards compatibility.
_live.tfm	Read/Write	**If Alignment Reference of the active job is set to Dynamic:**

Name	Read/Write	Description
		A copy of the Transform component in _live.job. Used primarily for backwards compatibility. **If Alignment Reference of the active job is set to Fixed:** The transformations that are used for *all* jobs whose Alignment Reference setting is set to Fixed.
_live.log	Read	A sensor log containing various messages. For more information on the log file, see *Log File* below.
_live.rec	Read/Write	The active replay simulation data.
ExtendedId.xml	Read	Sensor identification.

Log File

The log file contains log messages generated by the sensor. The root element is *Log*.

To access the log file, use the Read File command, passing "_live.log" to the command. The log file is read-only.

Log Child Elements

Element	Type	Description
List of (Info | Warning | Error)	List	An ordered list of log entries.

Log/Info | Log/Warning | Log/Error Elements

Element	Type	Description
@time	64u	Log time, in uptime (µs).
@value	String	Log content; may contain printf-style format specifiers (e.g. %u).
List of (IntArg | FloatArg | Arg)	List	An ordered list of arguments: IntArg – Integer argument FloatArg – Floating-point argument Arg – Generic argument

The arguments are all sent as strings and should be applied in order to the format specifiers found in the content.

Job Files

The following sections describe the structure of job files.

Job files, which are stored in a Gocator's internal storage, control system behavior when a sensor is running. Job files contain the settings and potentially the transformations and models associated with the job (if Alignment Reference is set to Dynamic).

There are two kinds of job files:

- A special job file called "_live.job." This job file contains the *active* settings and potentially the transformations and models associated with the job. It is stored in volatile storage.
- Other job files that are stored in non-volatile storage.

Job File Components

A job file contains components that can be loaded and saved as independent files. The following table lists the components of a job file:

Job File Components

Component	Path	Description
Configuration	config.xml	The job's configurations. This component is always present.
Transform	transform.xml	Transformation values. Present only if Alignment Reference is set to Dynamic.
Part model	<name>.mdl	One or more part model files. Part models are created using models and part matching.

Elements in the components contain three types of values: settings, constraints, and properties. Settings are input values that can be edited. Constraints are read-only limits that define the valid values for settings. Properties are read-only values that provide supplemental information related to sensor setup.

When a job file is received from a sensor, it will contain settings, constraints, and properties. When a job file is sent to a sensor, any constraints or properties in the file will be ignored.

Changing the value of a setting can affect multiple constraints and properties. After you upload a job file, you can download the job file again to access the updated values of the constraints and properties.

All Gocator sensors share a common job file structure.

Accessing Files and Components

Job file components can be accessed individually as XML files using path notation. For example, the configurations in a user-created job file called *productionRun01.job* can be read by passing "productionRun01.job/config.xml" to the Read File command. In the same way, the configurations in the active job could be read using "_live.job/config.xml".

> If Alignment Reference is set to Fixed, the active job file (_live.job) will not contain transformations. To access transformations in this case, you must access them via _live.tfm.

> The following sections correspond to the XML structure used in job file components.

Configuration

The Configuration component of a job file contains settings that control how a Gocator sensor behaves.

You can access the Configuration component of the active job as an XML file, either using path notation, via "_live.job/config.xml", or directly via "_live.cfg".

You can access the Configuration component in user-created job files in non-volatile storage, for example, "productionRun01.job/config.xml". You can only access configurations in user-created job files using path notation.

See the following sections for the elements contained in this component.

Configuration Child Elements

Element	Type	Description
@version	32u	Configuration version (101).
@versionMinor	32u	Configuration minor version (5).
Setup	Section	For a description of the Setup elements, see *Setup* below.
Replay	Section	Contains settings related to recording filtering (see *Replay* on page 275).
Streams	Section	Read-only collection of available data streams (see *Streams/Stream (Read-only)* on page 276).
ToolOptions	Section	List of available tool types and their information. See *ToolOptions* on page 277 for details.
Tools	Collection	Collection of sections. Each section is an instance of a tool and is named by the type of the tool it describes. For more information, see the sections for each tool under *Tools* on page 278.
Tools.options	String (CSV)	Deprecated. Replaced by ToolOptions.
Output	Section	For a description of the Output elements, see *Output* on page 315.

Setup

The Setup element contains settings related to system and sensor setup.

Setup Child Elements

Element	Type	Description
TemperatureSafetyEnabled	Bool	Enables laser temperature safety control.
TemperatureSafetyEnabled.used	Bool	Whether or not this property is used.
ScanMode	32s	The default scan mode.
ScanMode options	String (CSV)	List of available scan modes.
OcclusionReductionEnabled	Bool	Enables occlusion reduction.
OcclusionReductionEnabled.used	Bool	Whether or not property is used.
OcclusionReductionEnabled.value	Bool	Actual value used if not configurable.
UniformSpacingEnabled	Bool	Enables uniform spacing.
UniformSpacingEnabled.used	Bool	Whether or not property is used.
UniformSpacingEnabled.value	Bool	Actual value used if not configurable.

Element	Type	Description
IntensityEnabled	Bool	Enables intensity data collection.
IntensityEnabled.used	Bool	Whether or not property is used.
IntensityEnabled.value	Bool	Actual value used if not configurable.
ExternalInputZPulseEnabled	Bool	Enables the External Input based encoder Z Pulse feature.
Filters	Section	See *Filters* below.
Trigger	Section	See *Trigger* on page 262.
Layout	Section	See *Layout* on page 263.
Alignment	Section	See *Alignment* on page 264.
Devices	Collection	A collection of two Device sections (with roles main and buddy). See *Devices / Device* on page 265.
SurfaceGeneration	Section	See *SurfaceGeneration* on page 269.
SurfaceSections	Section	See *SurfaceSections* on page 270.
ProfileGeneration	Section	See *ProfileGeneration* on page 271. Used by Gocator displacement sensors.
PartDetection	Section	See *PartDetection* on page 272.
PartMatching	Section	See *PartMatching* on page 273.
Custom	Custom	Used by specialized sensors.

Filters

The Filters element contains settings related to post-processing profiles before they are output or used by measurement tools.

XSmoothing

XSmoothing Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

YSmoothing

YSmoothing Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

XGapFilling

XGapFilling Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

YGapFilling

YGapFilling Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

XMedian

XMedian Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

YMedian

YMedian Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

XDecimation

XDecimation Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

YDecimation

YDecimation Child Elements

Element	Type	Description
Enabled	Bool	Enables filtering.
Window	64f	Window size (mm).
Window.min	64f	Minimum window size (mm).
Window.max	64f	Maximum window size (mm).

Trigger

The Trigger element contains settings related to trigger source, speed, and encoder resolution.

Trigger Child Elements

Element	Type	Description
Source	32s	Trigger source: 0 – Time 1 – Encoder 2 – Digital Input 3 – Software
Source.options	32s (CSV)	List of available source options.
Units	32s	Sensor triggering units when source is not clock or encoder: 0 – Time 1 – Encoder
FrameRate	64f	Frame rate for time trigger (Hz).
FrameRate.min	64f	Minimum frame rate (Hz).
FrameRate.max	64f	Maximum frame rate (Hz).
FrameRate.maxSource	32s	Source of maximum frame rate limit: 0 – Imager 1 – Surface generation
MaxFrameRateEnabled	Bool	Enables maximum frame rate (ignores FrameRate).
EncoderSpacing	64f	Encoder spacing for encoder trigger (mm).
EncoderSpacing.min	64f	Minimum encoder spacing (mm).
EncoderSpacing.max	64f	Maximum encoder spacing (mm).
EncoderSpacing.minSource	32s	Source of minimum encoder spacing: 0 – Resolution 1 – Surface generation
EncoderTriggerMode	32s	Encoder triggering mode: 0 – Tracking backward 1 – Bidirectional 2 – Ignore backward

Element	Type	Description
Delay	64f	Trigger delay (µs or mm).
Delay.min	64f	Minimum trigger delay (µs or mm).
Delay.max	64f	Maximum trigger delay (µs or mm).
GateEnabled	Bool	Enables digital input gating.
GateEnabled.used	Bool	True if this parameter can be configured.
GateEnabled.value	Bool	Actual value if the parameter cannot be configured.

Layout

Layout Child Elements

Element	Type	Description
DataSource	32s	Data source of the layout output (read-only): 0 – Top 1 – Bottom 2 – Top left 3 – Top right 4 – Top Bottom 5 – Left Right
XSpacingCount	32u	Number of points along X when data is resampled.
YSpacingCount	32u	Number of points along Y when data is resampled.
TransformedDataRegion	Region3D	Transformed data region of the layout output.
Orientation	32s	Sensor orientation: 0 – Wide 1 – Opposite 2 – Reverse
Orientation.options	32s (CSV)	List of available orientation options.
Orientation.value	32s	Actual value used if not configurable.
MultiplexBuddyEnabled	Bool	Enables multiplexing for buddies.
MultiplexSingleEnabled	Bool	Enables multiplexing for a single sensor configuration.
MultiplexSingleExposureDuration	64f	Exposure duration in µs (currently rounded to integer when read by the sensor)
MultiplexSingleDelay	64f	Delay in µs. (Currently gets rounded up when read by the sensor.)
MultiplexSinglePeriod	64f	Period in µs. (Currently gets rounded up when read by the sensor.)
MultiplexSinglePeriod.min	64f	Minimum period in µs.

Region3D Child Elements

Element	Type	Description
X	64f	X start (mm).
Y	64f	Y start (mm).
Z	64f	Z start (mm).

Element	Type	Description
Width	64f	X extent (mm).
Length	64f	Y extent (mm).
Height	64f	Z extent (mm).

Alignment

The Alignment element contains settings related to alignment and encoder calibration.

Alignment Child Elements

Element	Type	Description
InputTriggerEnabled	Bool	Enables digital input-triggered alignment operation.
InputTriggerEnabled.used	Bool	Whether or not this feature can be enabled. This feature is available only on some sensor models.
InputTriggerEnabled.value	Bool	Actual feature status.
Type	32s	Type of alignment operation: 0 – Stationary 1 – Moving
Type.options	32s (CSV)	List of available alignment types.
StationaryTarget	32s	Stationary alignment target: 0 – None 1 – Disk 2 – Bar 3 – Plate
StationaryTarget.options	32s (CSV)	List of available stationary alignment targets.
MovingTarget	32s	Moving alignment target: 0 – None 1 – Disk 2 – Bar 3 – Plate
MovingTarget.options	32s (CSV)	List of available moving alignment targets.
EncoderCalibrateEnabled	Bool	Enables encoder resolution calibration.
Disk	Section	See *Disk* below.
Bar	Section	See *Bar* on the next page.
Plate	Section	See *Plate* on the next page.

Disk

Disk Child Elements

Element	Type	Description
Diameter	64f	Disk diameter (mm).
Height	64f	Disk height (mm).

Bar

Bar Child Elements

Element	Type	Description
Width	64f	Bar width (mm).
Height	64f	Bar height (mm).
HoleCount	32u	Number of holes.
HoleDistance	64f	Distance between holes (mm).
HoleDiameter	64f	Diameter of holes (mm).

Plate

Plate Child Elements

Element	Type	Description
Height	64f	Plate height (mm).
HoleCount	32u	Number of holes.
RefHoleDiameter	64f	Diameter of reference hole (mm).
SecHoleDiameter	64f	Diameter of secondary hole(s) (mm).

Devices / Device

Devices / Device Child Elements

Element	Type	Description
@role	32s	Sensor role: 0 – Main 1 – Buddy
DataSource	32s	Data source of device output (read-only): 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
XSpacingCount	32u	Number of resampled points along X (read-only).
YSpacingCount	32u	Number of resampled points along Y (read-only).
ActiveArea	Region3D	Active area. (Contains min and max attributes for each element.)
TransformedDataRegion	Region3D	Active area after transformation (read-only).
FrontCamera	Window	Front camera window (read-only).
BackCamera	Window	Back camera window (read-only).
BackCamera.used	Bool	Whether or not this field is used.
PatternSequenceType	32s	The projector pattern sequence to display when a projector equipped device is running. The following types are possible: -1 – None

Element	Type	Description
		0 – Default 100 – Nine Lines
PatternSequenceType.options	32s	List of available pattern sequence types.
PatternSequenceType.used	Bool	Whether or not this field is used.
PatternSequenceCount	32u	Number of frames in the active sequence (read-only).
ExposureMode	32s	Exposure mode: 0 – Single exposure 1 – Multiple exposures 2 – Dynamic exposure
ExposureMode.options	32s (CSV)	List of available exposure modes.
Exposure	64f	Single exposure (µs).
Exposure.min	64f	Minimum exposure (µs).
Exposure.max	64f	Maximum exposure (µs).
DynamicExposureMin	64f	Dynamic exposure range minimum (µs).
DynamicExposureMax	64f	Dynamic exposure range maximum (µs).
ExposureSteps	64f (CSV)	Mutiple exposure list (µs).
ExposureSteps.countMin	32u	Minimum number of exposure steps.
ExposureSteps.countMax	32u	Maximum number of exposure steps.
IntensityStepIndex	32u	Index of exposure step to use for intensity when using multiple exposures.
XSubsampling	32u	Subsampling factor in X.
XSubsampling.options	32u (CSV)	List of available subsampling factors in X.
ZSubsampling	32u	Subsampling factor in Z.
ZSubsampling.options	32u (CSV)	List of available subsampling factors in Z.
SpacingInterval	64f	Uniform spacing interval (mm).
SpacingInterval.min	64f	Minimum spacing interval (mm).
SpacingInterval.max	64f	Maximum spacing interval (mm).
SpacingInterval.used	Bool	Whether or not field is used.
SpacingInterval value	64f	Actual value used.
SpacingIntervalType	32s	Spacing interval type: 0 – Maximum resolution 1 – Balanced 2 – Maximum speed 3 – Custom
SpacingIntervalType.used	Bool	Whether or not field is used.

Element	Type	Description
Tracking	Section	See *Tracking* below.
Material	Section	See *Material* below.
Custom	Custom	Used by specialized sensors.

Region3D Child Elements

Element	Type	Description
X	64f	X start (mm).
Y	64f	Y start (mm).
Z	64f	Z start (mm).
Width	64f	X extent (mm).
Length	64f	Y extent (mm).
Height	64f	Z extent (mm).

Window Child Elements

Element	Type	Description
X	32u	X start (pixels).
Y	32u	Y start (pixels).
Width	32u	X extent (pixels).
Height	32u	Y extent (pixels).

Tracking

Tracking is not available on Gocator 1300, 2100, and 3100 series sensors.

Tracking Child Elements

Element	Type	Description
Enabled	Bool	Enables tracking.
Enabled.used	Bool	Whether or not this field is used.
SearchThreshold	64f	Percentage of spots that must be found to remain in track.
Height	64f	Tracking window height (mm).
Height.min	64f	Minimum tracking window height (mm).
Height.max	64f	Maximum tracking window height (mm).

Material

Material Child Elements

Element	Type	Description
Type	32s	Type of Material settings to use. 0 – Custom 1 – Diffuse
Type.used	Bool	Determines if the setting's value is currently used.

Element	Type	Description
Type.value	32s	Value in use by the sensor, useful for determining value when used is false.
SpotThreshold	32s	Spot detection threshold.
SpotThreshold.used	Bool	Determines if the setting's value is currently used.
SpotThreshold.value	32s	Value in use by the sensor, useful for determining value when used is false.
SpotWidthMax	32s	Spot detection maximum width.
SpotWidthMax.used	Bool	Determines if the setting's value is currently used.
SpotWidthMax.value	32s	Value in use by the sensor, useful for determining value when used is false.
SpotWidthMax.min	32s	Minimum allowed spot detection maximum value.
SpotWidthMax.max	32s	Maximum allowed spot detection maximum value.
SpotSelectionType	32s	Spot selection type 0 – Best. Picks the strongest spot in a given column. 1 – Top. Picks the spot which is most Top/Left on the imager 2 – Bottom. Picks the spot which is most Bottom/Right on the imager 3 – None. All spots are available. This option may not be available in some configurations.
SpotSelectionType.used	Bool	Determines if the setting's value is currently used.
SpotSelectionType.value	32s	Value in use by the sensor, useful for determining value when used is false.
SpotSelectionType.options	32s (CSV)	List of available spot selection types.
CameraGainAnalog	64f	Analog camera gain factor.
CameraGainAnalog.used	Bool	Determines if the setting's value is currently used.
CameraGainAnalog.value	64f	Value in use by the sensor, useful for determining value when used is false.
CameraGainAnalog.min	64f	Minimum value.
CameraGainAnalog.max	64f	Maximum value.
CameraGainDigital	64f	Digital camera gain factor.
CameraGainDigital.used	Bool	Determines if the setting's value is currently used.
CameraGainDigital.value	64f	Value in use by the sensor, useful for determining value when used is false.
CameraGainDigital.min	64f	Minimum value.
CameraGainDigital.max	64f	Maximum value.
DynamicSensitivity	64f	Dynamic exposure control sensitivity factor. This can be used to scale the control setpoint.

Element	Type	Description
DynamicSensitivity.used	Bool	Determines if the setting's value is currently used.
DynamicSensitivity.value	64f	Value in use by the sensor, useful for determining value when used is false.
DynamicSensitivity.min	64f	Minimum value.
DynamicSensitivity.max	64f	Maximum value.
DynamicThreshold	32s	Dynamic exposure control threshold. If the detected number of spots is fewer than this number, the exposure will be increased.
DynamicThreshold.used	Bool	Determines if the setting's value is currently used.
DynamicThreshold.value	32s	Value in use by the sensor, useful for determining value when used is false.
DynamicThreshold.min	32s	Minimum value.
DynamicThreshold.max	32s	Maximum value.
SensitivityCompensationEnabled	Bool	Sensitivity compensation toggle. Used in determining analog and digital gain, along with exposure scale.
SensitivityCompensationEnabled.used	Bool	Determines if the setting's value is currently used.
SensitivityCompensationEnabled.value	Bool	Value in use by the sensor, useful for determining value when used is false.
GammaType	32s	Gamma type.
GammaType used	Bool	Value in use by the sensor, useful for determining value when used is false.
GammaType value	32s	Determines if the setting's value is currently used.

SurfaceGeneration

The SurfaceGeneration element contains settings related to surface generation.

SurfaceGeneration Child Elements

Element	Type	Description
Type	32s	Surface generation type: 0 – Continuous 1 – Fixed length 2 – Variable length 3 – Rotational
FixedLength	Section	See *FixedLength* below.
VariableLength	Section	See *VariableLength* on the next page.
Rotational	Section	See *Rotational* on the next page.

FixedLength

FixedLength Child Elements

Element	Type	Description
StartTrigger	32s	Start trigger condition:

Element	Type	Description
		0 – Sequential 1 – Digital input
Length	64f	Surface length (mm).
Length.min	64f	Minimum surface length (mm).
Length.max	64f	Maximum surface length (mm).

VariableLength

VariableLength Child Elements

Element	Type	Description
MaxLength	64f	Maximum surface length (mm).
MaxLength.min	64f	Minimum value for maximum surface length (mm).
MaxLength.max	64f	Maximum value for maximum surface length (mm).

Rotational

Rotational Child Elements

Element	Type	Description
Circumference	64f	Circumference (mm).
Circumference.min	64f	Minimum circumference (mm).
Circumference.max	64f	Maximum circumference (mm).

SurfaceSections

SurfaceSections Child Elements

Element	Type	Description
@xMin	64f	The minimum valid X value to be used for section definition.
@xMax	64f	The maximum valid X value to be used for section definition.
@yMin	64f	The minimum valid Y value to be used for section definition.
@yMax	64f	The maximum valid Y value to be used for section definition.
Section	Collection	A series of Section elements.

Section Child Elements

Element	Type	Description
@id	32s	The ID assigned to the surface section.
@name	String	The name associated with the surface section.
StartPoint	Point64f	The beginning point of the surface section.
EndPoint	Point64f	The end point of the surface section.
CustomSpacingIntervalEnabled	Bool	Indicates whether a user specified custom spacing interval is to be used for the resulting section.
SpacingInterval	64f	The user specified spacing interval.

Element	Type	Description
SpacingInterval.min	64f	The spacing interval limit minimum.
SpacingInterval.max	64f	The spacing interval limit maximum.
SpacingInterval.value	64f	The current spacing interval used by the system.

ProfileGeneration

The ProfileGeneration element contains settings related to profile generation.

This element is used by Gocator laser displacement sensors.

ProfileGeneration Child Elements

Element	Type	Description
Type	32s	Profile generation type: 0 – Continuous 1 – Fixed length 2 – Variable length 3 – Rotational
FixedLength	Section	See *FixedLength* below.
VariableLength	Section	See *VariableLength* below.
Rotational	Section	See *Rotational* on the next page.

FixedLength

FixedLength Child Elements

Element	Type	Description
StartTrigger	32s	Start trigger condition: 0 – Sequential 1 – Digital input
Length	64f	Profile length (mm).
Length.min	64f	Minimum profile length (mm).
Length.max	64f	Maximum profile length (mm).

VariableLength

VariableLength Child Elements

Element	Type	Description
MaxLength	64f	Maximum surface length (mm).
MaxLength.min	64f	Minimum value for maximum profile length (mm).
MaxLength.max	64f	Maximum value for maximum profile length (mm).

Rotational

Rotational Child Elements

Element	Type	Description
Circumference	64f	Circumference (mm).
Circumference.min	64f	Minimum circumference (mm).
Circumference.max	64f	Maximum circumference (mm).

PartDetection

PartDetection Child Elements

Element	Type	Description
Enabled	Bool	Enables part detection.
Enabled.used	Bool	Whether or not this field is used.
Enabled value	Bool	Actual value used if not configurable.
Threshold	64f	Height threshold (mm).
Threshold.min	64f	Minimum height threshold (mm).
Threshold.max	64f	Maximum height threshold (mm).
ThresholdDirection	32u	Threshold direction: 0 – Above 1 – Below
MinArea	64f	Minimum area (mm^2).
MinArea.min	64f	Minimum value of minimum area.
MinArea.max	64f	Maximum value of minimum area.
MinArea.used	Bool	Whether or not this field is used.
GapWidth	64f	Gap width (mm).
GapWidth.min	64f	Minimum gap width (mm).
GapWidth.max	64f	Maximum gap width (mm).
GapWidth.used	Bool	Whether or not this field is used.
GapLength	64f	Gap length (mm).
GapLength.min	64f	Minimum gap length (mm).
GapLength.max	64f	Maximum gap length (mm).
GapLength.used	Bool	Whether or not this field is used.
PaddingWidth	64f	Padding width (mm).
PaddingWidth.min	64f	Minimum padding width (mm).
PaddingWidth.max	64f	Maximum padding width (mm).
PaddingWidth.used	Bool	Whether or not this field is used.
PaddingLength	64f	Padding length (mm).
PaddingLength.min	64f	Minimum padding length (mm).
PaddingLength.max	64f	Maximum padding length (mm).

Element	Type	Description
PaddingLength.used	Bool	Whether or not this field is used.
MinLength	64f	Minimum length (mm).
MinLength.min	64f	Minimum value of minimum length (mm).
MinLength.max	64f	Maximum value of minimum length (mm).
MinLength.used	Bool	Whether or not this field is used.
MaxLength	64f	Maximum length (mm).
MaxLength.min	64f	Minimum value of maximum length (mm).
MaxLength.max	64f	Maximum value of maximum length (mm).
MaxLength.used	Bool	Whether or not this field is used.
FrameOfReference	32s	Part frame of reference: 0 – Sensor 1 – Scan 2 – Part
FrameOfReference.used	Bool	Whether or not this field is used.
FrameOfReference.value	32s	Actual value.
EdgeFiltering	Section	See *EdgeFiltering* below.

EdgeFiltering

EdgeFiltering Child Elements

Element	Type	Description
@used	Bool	Whether or not this section is used.
Enabled	Bool	Enables edge filtering.
PreserveInteriorEnabled	Bool	Enables preservation of interior.
ElementWidth	64f	Element width (mm).
ElementWidth.min	64f	Minimum element width (mm).
ElementWidth.max	64f	Maximum element width (mm).
ElementLength	64f	Element length (mm).
ElementLength.min	64f	Minimum element length (mm).
ElementLength.max	64f	Maximum element length (mm).

PartMatching

The PartMatching element contains settings related to part matching.

PartMatching Child Elements

Element	Type	Description
Enabled	Bool	Enables part matching.
Enabled.used	Bool	Whether or not this field is used.
MatchAlgo	32s	Match algorithm.

Element	Type	Description
		0 – Edge points 1 – Bounding Box 2 – Ellipse
Edge	Section	See *Edge* below.
BoundingBox	Section	See *BoundingBox* below.
Ellipse	Section	See *Ellipse* below.

Edge

Edge Child Elements

Element	Type	Description
ModelName	String	Name of the part model to use. Does not include the .mdl extension.
Acceptance/Quality/Min	64f	Minimum quality value for a match.

BoundingBox

BoundingBox Child Elements

Element	Type	Description
ZAngle	64f	Z rotation to apply to bounding box (degrees).
AsymmetryDetectionType	32s	Determine whether to use asymmetry detection and, if enabled, which dimension is the basis of detection. The possible values are: 0 – None 1 – Length 2 - Width
Acceptance/Width/Min	64f	Minimum width (mm).
Acceptance/Width/Max	64f	Maximum width (mm).
Acceptance/Length/Min	64f	Minimum length (mm).
Acceptance/Length/Max	64f	Maximum length (mm).

Ellipse

Ellipse Child Elements

Element	Type	Description
ZAngle	64f	Z rotation to apply to ellipse (degrees).
AsymmetryDetectionType	32s	Determine whether to use asymmetry detection and, if enabled, which dimension is the basis of detection. The possible values are: 0 – None 1 – Major 2 - Minor
Acceptance/Major/Min	64f	Minimum major length (mm).

Element	Type	Description
Acceptance/Major/Max	64f	Maximum major length (mm).
Acceptance/Minor/Min	64f	Minimum minor length (mm).
Acceptance/Minor/Max	64f	Maximum minor length (mm).

Replay

Contains settings related to recording filtering.

RecordingFiltering

RecordingFiltering Child Elements

Element	Type	Description
ConditionCombineType	32s	0 – Any: If any enabled condition is satisfied, the current frame is recorded. 1 – All: All enabled conditions must be satisfied for the current frame to be recorded.
Conditions	Collection	A collection of AnyMeasurement, AnyData, or Measurement conditions.

Conditions/AnyMeasurement

Conditions/AnyMeasurement Elements

Element	Type	Description
Enabled	Bool	Indicates whether the condition is enabled.
Result	32s	The measurement decision criteria to be included in the filter. Possible values are: 0 – Pass 1 – Fail 2 – Valid 3 – Invalid

Conditions/AnyData

Conditions/AnyData Elements

Element	Type	Description
Enabled	Bool	Indicates whether the condition is enabled.
RangeCountCase	32s	The case under which to record data: 0 – Range count at or above threshold of valid data points. 1 – Range count below threshold.
RangeCountThreshold	32u	The threshold for the number of range points that are valid.

Conditions/Measurement

Conditions/Measurement Elements

Element	Type	Description
Enabled	Bool	Indicates whether the condition is enabled.
Ids	32s	The ID of the measurement to filter.
Result	32s	The measurement decision criteria for the selected ID to be included in the filter. Possible values are: 0 – Pass 1 – Fail 2 – Valid 3 – Invalid

Streams/Stream (Read-only)

Streams/Stream Child Elements

Element	Type	Description
Step	32s	The data step of the stream being described. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Id	32u	The stream ID.
TempoGroup	32u	Represents a stage in the data processing pipeline. The greater the number, the farther removed from the initial acquisition stage.
Sources	Collection	A collection of Source elements as described below.

Source Child Elements

Element	Type	Description
Id	32s	The ID of the data source. Possible values are: 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right 4 – Top Bottom 5 – Left Right
Capability	32s	The capability of the data stream source. Possible values are: 0 – Full 1 – Diagnostic only 2 - Virtual
Region	Region3d	The region of the given stream source.

ToolOptions

The ToolOptions element contains a list of available tool types, their measurements, and settings for related information.

ToolOptions Child Elements

Element	Type	Description
<Tool Names>	Collection	A collection of tool name elements. An element for each tool type is present.

Tool Name Child Elements

Element	Type	Description
@displayName	String	Display name of the tool.
@isCustom	Bool	Reserved for future use.
MeasurementOptions	Collection	See *MeasurementOptions* below
StreamOptions	Collection	A collection of *StreamOption* below elements.

MeasurementOptions

MeasurementOptions Child Elements

Element	Type	Description
<Measurement Names>	Collection	A collection of measurement name elements. An element for each measurement is present.

<Measurement Name> Child Elements

Element	Type	Description
@displayName	String	Display name of the tool.
@minCount	32u	Minimum number of instances in a tool.
@maxCount	32u	Maximum number of instances in a tool.

StreamOption

StreamOption Child Elements

Element	Type	Description
@step	32s	The data step of the stream being described. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
@ids	CSV	A list representing the available IDs associated with the given step.

Tools

The Tools element contains measurement tools. The following sections describe each tool and its available measurements.

Tools Child Elements

Element	Type	Description
@options	String (CSV)	A list of the tools available in the currently selected scan mode.
<ToolType>	Section	An element for each added tool.

Profile Types

The following types are used by various measurement tools.

ProfileFeature

An element of type ProfileFeature defines the settings for detecting a feature within an area of interest.

ProfileFeature Child Elements

Element	Type	Description
Type	32s	Determine how the feature is detected within the area: 0 – Max Z 1 – Min Z 2 – Max X 3 – Min X 4 – Corner 5 – Average 6 – Rising Edge 7 – Falling Edge 8 – Any Edge 9 – Top Corner 10 – Bottom Corner 11 – Left Corner 12 – Right Corner 13 – Median
RegionEnabled	Bool	Indicates whether feature detection applies to the defined Region or to the entire active area.
Region	ProfileRegion2D	Element for feature detection area.

ProfileLine

An element of type ProfileLine defines measurement areas used to calculate a line.

ProfileLine Child Elements

Element	Type	Description
RegionCount	32s	Count of the regions.
Regions	(Collection)	The regions used to calculate a line. Contains one or two Region elements of type ProfileRegion2D, with RegionEnabled fields for each.

ProfileRegion2d

An element of type ProfileRegion2d defines a rectangular area of interest.

ProfileRegion2d Child Elements

Element	Type	Description
X	64f	Setting for profile region X position (mm).
Z	64f	Setting for profile region Z position (mm).
Width	64f	Setting for profile region width (mm).
Height	64f	Setting for profile region height (mm).

Surface Types

The following types are used by the various measurement tools.

Region3D

An element of type Region3D defines a rectangular area of interest in 3D.

Region3D Child Elements

Element	Type	Description
X	64f	Volume X position (mm).
Y	64f	Volume Y position (mm).
Z	64f	Volume Z position (mm).
Width	64f	Volume width (mm).
Length	64f	Volume length (mm).
Height	64f	Volume height (mm).

SurfaceFeature

An element of type SurfaceFeature defines the settings for detecting a feature within an area of interest.

SurfaceFeature Child Elements

Element	Type	Description
Type	32s	Setting to determine how the feature is detected within the area: 0 – Average (formerly Centroid 2d) 1 – Centroid (formerly Centroid 3d) 2 – X Min 3 – X Max 4 – Y Min 5 – Y Max 6 – Z Min 7 – Z Max 8 – Median
RegionEnabled	Boolean	Setting to enable/disable region: 0 – Disable 1 – Enable
Region	Region3D	Element for feature detection volume.

SurfaceRegion2d

An element of type SurfaceRegion2d defines a rectangular area of interest on the X-Y plane.

SurfaceRegion2d Child Elements

Element	Type	Description
X	64f	Setting for surface region X position (mm).
Y	64f	Setting for surface region Y position (mm).
Width	64f	Setting for region width (mm).
Length	64f	Setting for region length (mm).

ProfileArea

A ProfileArea element defines settings for a profile area tool and one or more of its measurements.

ProfileArea Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
Type	Boolean	Area to measure: 0 – Object (convex shape above the baseline) 1 – Clearance (concave shape below the baseline)
Type.used	Boolean	Whether or not field is used.
Baseline	Boolean	Baseline type: 0 – X-axis 1 – Line
Baseline.used	Boolean	Whether or not field is used.
RegionEnabled	Boolean	If enabled, the defined region is used for measurements. Otherwise, the full active area is used.
Region	ProfileRegion2d	Measurement region.

Element	Type	Description
Line	ProfileLine	Line definition when Baseline is set to Line.
Measurements\Area	Area tool measurement	Area measurement.
Measurements\CentroidX	Area tool measurement	CentroidX measurement.
Measurements\CentroidZ	Area tool measurement	CentroidZ measurement.

Area Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

ProfileBoundingBox

A ProfileBoundingBox element defines settings for a profile bounding box tool and one or more of its measurements.

ProfileBoundingBox Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.

Element	Type	Description
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RegionEnabled	Bool	Whether or not to use the region. If the region is disabled, all available data is used.
Region	ProfileRegion2d	Measurement region.
Measurements\X	Bounding Box tool measurement	X measurement.
Measurements\Z	Bounding Box tool measurement	Z measurement.
Measurements\Width	Bounding Box tool measurement	Width measurement.
Measurements\Height	Bounding Box tool measurement	Height measurement.
Measurements\GlobalX	Bounding Box tool measurement	GlobalX measurement
Measurements\GlobalY	Bounding Box tool measurement	GlobalY measurement
Measurements\GlobalAngle	Bounding Box tool measurement	GlobalAngle measurement

Bounding Box Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable

Element	Type	Description
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

ProfileBridgeValue

A ProfileBridgeValue element defines settings for a profile bridge value tool and one or more of its measurements.

ProfileBridgeValue Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RegionEnabled	Boolean	Whether or not to use region. If region is disabled, all available data is used.
Region	ProfileRegion2d	Measurement region.
WindowSize	64f	A percentage of the profile point heights when ordered from lowest to highest in a histogram, starting from the highest points, to include in the bridge value calculation.
WindowSkip	64f	A percentage of the profile point heights when ordered from lowest to highest in a histogram, starting from the highest points, to exclude from the bridge value calculation. Combines with WindowSize to determine what portion of

Element	Type	Description
		the profile points are used in the bridge value calculation.
MaxInvalid	64f	The maximum percentage of invalid points.
NormalizeEnabled	Boolean	Whether tilt normalization is enabled.
MaxDifferential	64f	Maximum differential between the lowest and highest profile points (mm).
MaxDifferential.min	64f	Maximum differential limit min (mm).
MaxDifferential.max	64f	Maximum differential limit max (mm).
Measurements\BridgeValue	Bridge Value tool measurement	Bridge Value measurement.
Measurements\Angle	Bridge Value tool measurement	Angle measurement.

BridgeValue Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

ProfileCircle

A ProfileCircle element defines settings for a profile circle tool and one or more of its measurements.

ProfileCircle Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RegionEnabled	Bool	Whether or not to use the region. If the region is disabled, all available data is used.
Region	ProfileRegion2d	Measurement region.
Measurements\X	Circle tool measurement	X measurement.
Measurements\Z	Circle tool measurement	Z measurement.
Measurements\Radius	Circle tool measurement	Radius measurement.

Circle Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable

Element	Type	Description
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

ProfileDimension

A ProfileDimension element defines settings for a profile dimension tool and one or more of its measurements.

ProfileDimension Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RefFeature	ProfileFeature	Reference measurement region.
Feature	ProfileFeature	Measurement region.
Measurements\Width	Dimension tool measurement	Width measurement.
Measurements\Height	Dimension tool measurement	Height measurement.
Measurements\Distance	Dimension tool measurement	Distance measurement.
Measurements\CenterX	Dimension tool measurement	CenterX measurement.
Measurements\CenterZ	Dimension tool measurement	CenterZ measurement.

Dimension Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
Absolute *(Width and Height measurements only)*	Boolean	Setting for selecting absolute or signed result: 0 – Signed 1 – Absolute

ProfileGroove

A ProfileGroove element defines settings for a profile groove tool and one or more of its measurements.

The profile groove tool is dynamic, meaning that it can contain multiple measurements of the same type in the Measurements element.

ProfileGroove Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video

Element	Type	Description
		2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
Shape	32s	Shape: 0 – U-shape 1 – V-shape 2 – Open
MinDepth	64f	Minimum depth.
MinWidth	64f	Minimum width.
MaxWidth	64f	Maximum width.
RegionEnabled	Bool	Whether or not to use the region. If the region is disabled, all available data is used.
Region	ProfileRegion2d	Measurement region.
Measurements\X	Groove tool measurement	X measurement.
Measurements\Z	Groove tool measurement	Z measurement.
Measurements\Width	Groove tool measurement	Width measurement.
Measurements\Depth	Groove tool measurement	Depth measurement.

Groove Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.

Element	Type	Description
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
SelectType	32s	Method of selecting a groove when multiple grooves are found: 0 – Max depth 1 – Ordinal, from left 2 – Ordinal, from right
SelectIndex	32s	Index when SelectType is set to 1 or 2.
Location *(X and Z measurements only)*	32s	Setting for groove location to return from: 0 – Bottom 1 – Left corner 2 – Right corner

ProfileIntersect

A ProfileIntersect element defines settings for a profile intersect tool and one or more of its measurements.

ProfileIntersect Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
RefType	32s	Reference line type: 0 – Fit 1 – X Axis
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RefLine	ProfileLine	Definition of reference line. Ignored if RefType is not 0.

Element	Type	Description
Line	ProfileLine	Definition of line.
Measurements\X	Intersect tool measurement	X measurement.
Measurements\Z	Intersect tool measurement	Z measurement.
Measurements\Angle	Intersect tool measurement	Angle measurement.

Intersect Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
Absolute *(Angle measurement only)*	Boolean	Setting for selecting the angle range: 0 – A range of -90 to 90 degrees is used. 1 – A range of 0 to 180 degrees is used.

ProfileLine

A ProfileLine element defines settings for a profile line tool and one or more of its measurements.

ProfileLine Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.

Element	Type	Description
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RegionEnabled	Bool	Whether or not to use the region. If the region is disabled, all available data is used.
Region	ProfileRegion2d	Measurement region.
Measurements\StdDev	Line tool measurement	StdDev measurement.
Measurements\MaxError	Line tool measurement	MaxError measurement.
Measurements\MinError	Line tool measurement	MinError measurement.
Measurements\Percentile	Line tool measurement	Percentile measurement.

Line Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.

Element	Type	Description
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
Percent *(Percentile measurement only)*	64f	Error percentile.

ProfilePanel

A ProfilePanel element defines settings for a profile panel tool and one or more of its measurements.

ProfilePanel Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RefSide	32s	Setting for reference side to use.
MaxGapWidth	64f	Setting for maximum gap width (mm).
LeftEdge	ProfilePanelEdge	Element for left ede configuration.
RightEdge	ProfilePanelEdge	Element for right edge configuration.
Measurements\Gap	Gap measurement	Gap measurement.
Measurements\Flush	Flush measurement	Flush measurement.

ProfilePanelEdge

Element	Type	Description
EdgeType	32s	Edge type: 0 – Tangent 1 – Corner
MinDepth	64f	Minimum depth.
MaxVoidWidth	64f	Maximum void width.

Element	Type	Description
SurfaceWidth	64f	Surface width.
SurfaceOffset	64f	Surface offset.
NominalRadius	64f	Nominal radius.
EdgeAngle	64f	Edge angle.
RegionEnabled	Bool	Whether or not to use the region. If the region is disabled, all available data is used.
Region	ProfileRegion2d	Edge region.

Gap Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
Axis	32s	Measurement axis: 0 – Edge 1 – Surface 2 – Distance

Flush Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable

Element	Type	Description
		1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
Absolute	Boolean	Setting for selecting absolute or signed result: 0 – Signed 1 – Absolute

ProfilePosition

A ProfilePosition element defines settings for a profile position tool and one or more of its measurements.

ProfilePosition Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
Feature	ProfileFeature	Element for feature detection.
Measurements\X	Position tool measurement	X measurement.
Measurements\Z	Position tool measurement	Z measurement.

Position Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

ProfileStrip

A ProfileStrip element defines settings for a profile strip tool and one or more of its measurements.

The profile strip tool is dynamic, meaning that it can contain multiple measurements of the same type in the Measurements element.

ProfileStrip Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Profile source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section

Element	Type	Description
Stream\Id	32u	The stream source ID.
BaseType	32s	Setting for the strip type: 0 – None 1 – Flat
LeftEdge	Bitmask	Setting for the left edge conditions: 1 – Raising 2 – Falling 4 – Data End 8 – Void
RightEdge	Bitmask	Setting for the right edge conditions: 1 – Raising 2 – Falling 4 – Data End 8 – Void
TiltEnabled	Boolean	Setting for tilt compensation: 0 – Disabled 1 – Enabled
SupportWidth	64f	Support width of edge (mm).
TransitionWidth	64f	Transition width of edge (mm).
MinWidth	64f	Minimum strip width (mm).
MinHeight	64f	Minimum strip height (mm).
MaxVoidWidth	64f	Void max (mm).
Region	ProfileRegion2d	Region containing the strip.
Measurements\X	Strip tool measurement	X measurement.
Measurements\Z	Strip tool measurement	Z measurement.
Measurements\Width	Strip tool measurement	Width measurement.
Measurements\Height	Strip tool measurement	Width measurement.

Strip Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state:

Element	Type	Description
		0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
SelectType	32s	Method of selecting a groove when multiple grooves are found: 0 – Best 1 – Ordinal, from left 2 – Ordinal, from right
SelectIndex	32s	Index when SelectType is set to 1 or 2.
Location *(X, Z, and Height measurements only)*	32s	Setting for groove location to return from: 0 – Left 1 – Right 2 – Center

Script

A Script element defines settings for a script measurement.

Script Child Elements

Element	Type	Description
Name	String	Tool name.
Code	String	Script code.
Measurements\Output	(Collection)	Dynamic list of Output elements.

Output

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.

SurfaceBoundingBox

A SurfaceBoundingBox element defines settings for a surface bounding box tool and one or more of its measurements.

SurfaceBoundingBox Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
ZRotationEnabled	Boolean	Setting to enable/disable rotation of bounding box
AsymmetryDetectionType	32s	Determine whether to use asymmetry detection and if enabled, which dimension would be the basis of detection. The possible values are: 0 – None 1 – Length 2 – Width
RegionEnabled	Boolean	Setting to enable/disable region.
Region	Region3D	Measurement region.
Measurements\X	Bounding Box tool measurement	X measurement.
Measurements\Y	Bounding Box tool measurement	Y measurement.
Measurements\Z	Bounding Box tool measurement	Z measurement.
Measurements\Width	Bounding Box tool measurement	Width measurement.
Measurements\Length	BoundingBoxMeasurement	Length measurement

Element	Type	Description
Measurements\Height	Bounding Box tool measurement	Height measurement.
Measurements\ZAngle	Bounding Box tool measurement	ZAngle measurement.
Measurements\GlobalX	Bounding Box tool measurement	Global X measurement.
Measurements\GlobalY	Bounding Box tool measurement	Global Y measurement.
Measurements\GlobalZAngle	Bounding Box tool measurement	Global Z Angle measurement.

Bounding Box Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

SurfaceCsHole

A SurfaceCsHole element defines settings for a surface countersunk hole tool and one or more of its measurements.

SurfaceCsHole Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.

Element	Type	Description
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
NominalBevelAngle	64f	Nominal bevel angle (mm).
NominalOuterRadius	64f	Nominal outer radius (mm).
NominalInnerRadius	64f	Nominal inner radius (mm).
BevelRadiusOffset	64f	Bevel radus offset (mm).
Shape	32s	The shape of the countersunk hole: 0 – Cone 1 – Counterbore
PartialDetectionEnabled	Boolean	Setting to enable/disable partial detection: 0 – Disable 1 – Enable
RegionEnabled	Boolean	Setting to enable/disable region: 0 – Disable 1 – Enable
Region	Region3D	Measurement region.
RefRegionsEnabled	Boolean	Setting to enable/disable reference regions: 0 – Disable 1 – Enable
RefRegionCount	32s	Count of the reference regions which are to be used
RefRegions	(Collection)	Reference regions. Contains 2 SurfaceRegion2D elements.
AutoTiltEnabled	Boolean	Setting to enable/disable tilt correction: 0 – Disable 1 – Enable
TiltXAngle	64f	Setting for manual tilt correction angle X.

Element	Type	Description
TiltYAngle	64f	Setting for manual tilt correction angle Y.
CurveFitEnabled	Boolean	Setting to enable/disable curve fitting: 0 – Disable 1 – Enable
CurveOrientation	64f	The orientation of the curvature, in degrees.
Measurements\X	Countersunk Hole tool measurement	X measurement.
Measurements\Y	Countersunk Hole tool measurement	Y measurement.
Measurements\Z	Countersunk Hole tool measurement	Z measurement.
Measurements\OuterRadius	Countersunk Hole tool measurement	Outer Radius measurement.
Measurements\Depth	Countersunk Hole tool measurement	Depth measurement.
Measurements\BevelRadius	Countersunk Hole tool measurement	Bevel Radius measurement.
Measurements\BevelAngle	Countersunk Hole tool measurement	Bevel Angle measurement.
Measurements\XAngle	Countersunk Hole tool measurement	X Angle measurement.
Measurements\YAngle	Countersunk Hole tool measurement	Y Angle measurement.
Measurements\CounterboreDepth	Countersunk Hole tool measurement	CounterboreDepth measurement.

Countersunk Hole Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable

Element	Type	Description
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

SurfaceDimension

A SurfaceDimension element defines settings for a surface dimension tool and one or more of its measurements.

SurfaceDimension Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
Measurements\CenterX	Dimension tool measurement	Center X measurement
Measurements\CenterY	Dimension tool measurement	Center Y measurement
Measurements\CenterZ	Dimension tool measurement	Center Z measurement
Measurements\Distance	Dimension tool measurement	Distance measurement
Measurements\PlaneDistance	Dimension tool measurement	Plane Distance measurement
Measurements\Height	Dimension tool measurement	Height measurement

Element	Type	Description
Measurements\Length	Dimension tool measurement	Length measurement
Measurements\Width	Dimension tool measurement	Width measurement

Dimension Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
Absolute *(Width, Height, and Length measurements only)*	Boolean	Setting for selecting absolute or signed result. 0 – Signed 1 – Absolute

SurfaceEllipse

A SurfaceEllipse element defines settings for a surface ellipse tool and one or more of its measurements.

SurfaceEllipse Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.

Element	Type	Description
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RegionEnabled	Boolean	Setting to enable/disable region.
Region	Region3D	Measurement region.
AsymmetryDetectionType	32s	Determine whether to use asymmetry detection and if enabled, which dimension would be the basis of detection. The possible values are: 0 – None 1 – Major 2 – Minor
Measurements\Major	Ellipse tool measurement	Major measurement.
Measurements\Minor	Ellipse tool measurement	Minor measurement.
Measurements\Ratio	Ellipse tool measurement	Ratio measurement.
Measurements\ZAngle	Ellipse tool measurement	ZAngle measurement.

Ellipse Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable

Element	Type	Description
		1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

SurfaceHole

A SurfaceHole element defines settings for a surface hole tool and one or more of its measurements.

SurfaceHole Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
NominalRadius	64f	Nominal radius (mm).
RadiusTolerance	64f	Radius tolerance (mm).
PartialDetectionEnabled	Boolean	Setting to enable/disable partial detection: 0 – Disable 1 – Enable
DepthLimitEnabled	Boolean	Setting to enable/disable depth limit: 0 – Disable 1 – Enable

Element	Type	Description
DepthLimit	64f	The depth limit relative to the surface. Data below this limit is ignored.
RegionEnabled	Boolean	Setting to enable/disable region: 0 – Disable 1 – Enable
Region	Region3D	Measurement region.
RefRegionsEnabled	Boolean	Setting to enable/disable reference regions: 0 – Disable 1 – Enable
RefRegionCount	32s	Count of the reference regions that are to be used.
RefRegions	(Collection)	Reference regions. Contains two RefRegion elements of type SurfaceRegion2D.
AutoTiltEnabled	Boolean	Setting to enable/disable tilt correction: 0 – Disable 1 – Enable
TiltXAngle	64f	Setting for manual tilt correction angle X.
TiltYAngle	64f	Setting for manual tilt correction angle Y.
Measurements\X	Hole tool measurement	X measurement
Measurements\Y	Hole tool measurement	Y measurement
Measurements\Z	Hole tool measurement	Z measurement
Measurements\Radius	Hole tool measurement	Radius measurement

Hole Tool Measurement

Element	Type	Description
@id	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable

Element	Type	Description
		1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

SurfaceOpening

A SurfaceOpening element defines settings for a surface opening tool and one or more of its measurements.

SurfaceOpening Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
Type	32s	Type of the opening: 0 – Rounded 1 – Slot
NominalWidth	64f	Nominal width (mm).
NominalLength	64f	Nominal length (mm).
NominalAngle	64f	Nominal angle (degrees).
NominalRadius	64f	Nominal radius (mm).
WidthTolerance	64f	Radius tolerance (mm).
LengthTolerance	64f	Length tolerance (mm).
AngleTolerance	64f	Angle tolerance (degrees).

Element	Type	Description
PartialDetectionEnabled	Boolean	Setting to enable/disable partial detection: 0 – Disable 1 – Enable
DepthLimitEnabled	Boolean	Setting to enable/disable depth limit: 0 – Disable 1 – Enable
DepthLimit	64f	The depth limit relative to the surface. Data below this limit is ignored.
RegionEnabled	Boolean	Setting to enable/disable region: 0 – Disable 1 – Enable
Region	Region3D	Measurement region.
RefRegionsEnabled	Boolean	Setting to enable/disable reference regions: 0 – Disable 1 – Enable
RefRegionCount	32s	Count of the reference regions that are to be used.
RefRegions	(Collection)	Reference regions. Contains two RefRegion elements of type SurfaceRegion2D.
AutoTiltEnabled	Boolean	Setting to enable/disable tilt correction: 0 – Disable 1 – Enable
TiltXAngle	64f	Setting for manual tilt correction angle X.
TiltYAngle	64f	Setting for manual tilt correction angle Y.
Measurements\X	Opening tool measurement	X measurement.
Measurements\Y	Opening tool measurement	Y measurement.
Measurements\Z	Opening tool measurement	Z measurement.
Measurements\Width	Opening tool measurement	Width measurement.
Measurements\Length	Opening tool measurement	Length measurement.
Measurements\Angle	Opening tool measurement	Angle measurement.

Opening Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not

Element	Type	Description
		set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

SurfacePlane

A SurfacePlane element defines settings for a surface plane tool and one or more of its measurements.

SurfacePlane Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RegionsEnabled	Boolean	Setting to enable/disable regions:

Element	Type	Description
		0 – Disable 1 – Enable
RegionCount	32s	Count of the regions.
Regions	(Collection)	Measurement regions. Contains one or two Region elements of type Region3D.
Measurements\XAngle	Plane tool measurement	XAngle measurement.
Measurements\YAngle	Plane tool measurement	YAngle measurement.
Measurements\ZOffset	Plane tool measurement	ZOffset measurement.
Measurements\StdDev	Plane tool measurement	Standard deviation measurement
Measurements\MinError	Plane tool measurement	Minimum error measurement
Measurements\MaxError	Plane tool measurement	Maximum error measurement

Plane Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

SurfacePosition

A SurfacePosition element defines settings for a surface position tool and one or more of its measurements.

SurfacePosition Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
Feature	SurfaceFeature	Measurement feature.
Measurements\X	Position tool measurement	X measurement.
Measurements\Y	Position tool measurement	Y measurement.
Measurements\Z	Position tool measurement	Z measurement.

Position Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable

Element	Type	Description
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.

SurfaceStud

A SurfaceStud element defines settings for a surface stud tool and one or more of its measurements.

SurfaceStud Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
StudRadius	64f	Radius of stud (mm).
StudHeight	64f	Height of stud (mm).
BaseHeight	64f	Height of stud's base.
TipHeight	64f	Height of stud's tip.
RegionEnabled	Boolean	Setting to enable/disable region.
Region	Region3D	Measurement region.
RefRegionsEnabled	Boolean	Setting to enable/disable reference regions: 0 – Disable 1 – Enable

Element	Type	Description
RefRegionCount	32s	Count of the reference regions that are to be used.
RefRegions	(Collection)	Reference regions. Contains two RefRegion elements of type SurfaceRegion2D.
AutoTiltEnabled	Boolean	Setting to enable/disable tilt correction: 0 – Disable 1 – Enable
TiltXAngle	64f	Setting for manual tilt correction angle X.
TiltYAngle	64f	Setting for manual tilt correction angle Y.
Measurements\BaseX	Stud tool measurement	BaseX measurement.
Measurements\BaseY	Stud tool measurement	BaseY measurement.
Measurements\BaseZ	Stud tool measurement	BaseZ measurement.
Measurements\TipX	Stud tool measurement	TipX measurement.
Measurements\TipY	Stud tool measurement	TipY measurement.
Measurements\TipZ	Stud tool measurement	TipZ measurement.
Measurements\Radius	Stud tool measurement	Radius measurement.

Stud Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not set).
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.

Element	Type	Description
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
RadiusOffset	64f	Radius offset of the stud.
(Radius measurement only)		

SurfaceVolume

A SurfaceVolume element defines settings for a surface volume tool and one or more of its measurements.

SurfaceVolume Child Elements

Element	Type	Description
Name	String	Tool name.
Source	32s	Surface source.
Anchor\X	String (CSV)	The X measurements (IDs) used for anchoring.
Anchor\X.options	String (CSV)	The X measurements (IDs) available for anchoring.
Anchor\Y	String (CSV)	The Y measurements (IDs) used for anchoring.
Anchor\Y.options	String (CSV)	The Y measurements (IDs) available for anchoring.
Anchor\Z	String (CSV)	The Z measurements (IDs) used for anchoring.
Anchor\Z.options	String (CSV)	The Z measurements (IDs) available for anchoring.
StreamOptions	Collection	A collection of *StreamOption* on page 277 elements.
Stream\Step	32s	The stream source step. Possible values are: 1 – Video 2 – Range 3 – Surface 4 – Section
Stream\Id	32u	The stream source ID.
RegionEnabled	Boolean	Setting to enable/disable region.
Region	Region3D	Measurement region.
Measurements\Volume	Volume tool measurement	Volume measurement.
Measurements\Area	Volume tool measurement	Area measurement.
Measurements\Thickness	Volume tool measurement	Thickness measurement.

Volume Tool Measurement

Element	Type	Description
id (attribute)	32s	Measurement ID. Optional (measurement disabled if not set).

Element	Type	Description
Name	String	Measurement name.
Enabled	Boolean	Measurement enable state: 0 – Disable 1 – Enable
HoldEnabled	Boolean	Output hold enable state: 0 – Disable 1 – Enable
SmoothingEnabled	Boolean	Smoothing enable state: 0 – Disable 1 – Enable
SmoothingWindow	32u	Smoothing window.
Scale	64f	Output scaling factor.
Offset	64f	Output offset factor.
DecisionMin	64f	Minimum decision threshold.
DecisionMax	64f	Maximum decision threshold.
Location *(Thickness measurement only)*	32s	Measurement type: 0 – Maximum 1 – Minimum 2 – 2D Centroid 3 – 3D Centroid 4 – Average 5 – Median

Output

The Output element contains the following sub-elements: Ethernet, Serial, Analog, Digital0, and Digital1. Each of these sub-elements defines the output settings for a different type of Gocator output.

For all sub-elements, the source identifiers used for measurement outputs correspond to the measurement identifiers defined in each tool's Measurements element. For example, in the following XML, in the options attribute of the Measurements element, 2 and 3 are the identifiers of measurements that are enabled and available for output. The value of the Measurements element (that is, 2) means that only the measurement with id 2 (Profile Dimension Width) will be sent to output.

```
<ProfileDimension>   ...
  <Measurements>
    <Width id="2">   ...
    <Height id="3">   ...


<Output>
```

```
  <Ethernet>     ...
    <Measurements options="2,3">2</Measurements>
```

Ethernet

The Ethernet element defines settings for Ethernet output.

In the Ethernet element, the source identifiers used for video, range, profile, and surface output, as well as range, profile, and surface intensity outputs, correspond to the *sensor* that provides the data. For example, in the XML below, the *options* attribute of the Profiles element shows that only two sources are available (see the table below for the meanings of these values). The value in this element—0—indicates that only data from that source will be sent to output.

```
<Output>
  <Ethernet>
     ...
    <Ranges options=""/>
    <Profiles options="0,1">0</Profiles>
    <Surfaces options=""/>
    ...
```

Ethernet Child Elements

Element	Type	Description
Protocol	32s	Ethernet protocol: 0 – Gocator 1 – Modbus 2 – EtherNet/IP 3 – ASCII
TimeoutEnabled	Boolean	Enable or disable auto-disconnection timeout. Applies only to the Gocator protocol.
Timeout	64f	Disconnection timeout (seconds). Used when TimeoutEnabled is true and the Gocator protocol is selected.
Ascii	Section	See *Ascii* on page 318.
EIP	Section	See *EIP* on page 318.
Modbus	Section	See *Modbus* on page 318.
Videos	32s (CSV)	Selected video sources: 0 – Top 1 – Bottom 2 – Top left 3 – Top right
Videos.options	32s (CSV)	List of available video sources (see above).
Ranges	32s (CSV)	Selected range sources: 0 – Top

Element	Type	Description
		1 – Bottom
		2 – Top left
		3 – Top right
Ranges.options	32s (CSV)	List of available range sources (see above).
Profiles	32s (CSV)	Selected profile sources:
		0 – Top
		1 – Bottom
		2 – Top left
		3 – Top right
Profiles.options	32s (CSV)	List of available profile sources (see above).
Surfaces	32s (CSV)	Selected surface sources:
		0 – Top
		1 – Bottom
		2 – Top left
		3 – Top right
Surfaces.options	32s (CSV)	List of available surface sources (see above).
RangeIntensities	32s (CSV)	Selected range intensity sources.
		0 – Top
		1 – Bottom
		2 – Top left
		3 – Top right
RangeIntensities.options	32s (CSV)	List of available range intensity sources (see above).
ProfileIntensities	32s (CSV)	Selected profile intensity sources.
		0 – Top
		1 – Bottom
		2 – Top left
		3 – Top right
ProfileIntensities.options	32s (CSV)	List of available profile intensity sources (see above).
SurfaceIntensities	32s (CSV)	Selected surface intensity sources:
		0 – Top
		1 – Bottom
		2 – Top left
		3 – Top right
SurfaceIntensities.options	32s (CSV)	List of available surface intensity sources (see above).
Measurements	32u (CSV)	Selected measurement sources.
Measurements.options	32u (CSV)	List of available measurement sources.

Ascii

Ascii Child Elements

Element	Type	Description
Operation	32s	Operation mode: 0 – Asynchronous 1 – Polled
ControlPort	32u	Control service port number.
HealthPort	32u	Health service port number.
DataPort	32u	Data service port number.
Delimiter	String	Field delimiter.
Terminator	String	Line terminator.
InvalidValue	String	String for invalid output.
CustomDataFormat	String	Custom data format.
CustomFormatEnabled	Bool	Enables custom data format.

EIP

EIP Child Elements

Element	Type	Description
BufferEnabled	Bool	Enables EtherNet/IP output buffering.
EndianOutputType	32s	Endian output type: 0 – Big endian 1 – Little endian
ImplicitOutputEnabled	Bool	Enables Implict (I/O) Messaging.
ImplicitTriggerOverride	32s	Override requested trigger type by client: 0 – No override 1 – Cyclic 2 – Change of State

Modbus

Modbus Child Elements

Element	Type	Description
BufferEnabled	Bool	Enables Modbus output buffering.

Digital0 and Digital1

The Digital0 and Digital1 elements define settings for the Gocator's two digital outputs.

Digital0 and Digital1 Child Elements

Element	Type	Description
Event	32s	Triggering event:

Element	Type	Description
		0 – None (disabled) 1 – Measurements 2 – Software 3 – Alignment state 4 – Acquisition start 5 – Acquisition end
SignalType	32s	Signal type: 0 – Pulse 1 – Continuous
ScheduleEnabled	Bool	Enables scheduling.
PulseWidth	64f	Pulse width (µs).
PulseWidth.min	64f	Minimum pulse width (µs).
PulseWidth.max	64f	Maximum pulse width (µs).
PassMode	32s	Measurement pass condition: 0 – AND of measurements is true 1 – AND of measurements is false 2 – Always assert
Delay	64f	Output delay (µs or mm, depending on delay domain defined below).
DelayDomain	32s	Output delay domain: 0 – Time (µs) 1 – Encoder (mm)
Measurements	32u (CSV)	Selected measurement sources.
Measurements.options	32u (CSV)	List of available measurement sources.

Analog

The Analog element defines settings for analog output.

The range of valid measurement values [DataScaleMin, DataScaleMax] is scaled linearly to the specified current range [CurrentMin, CurrentMax].

Only one Value or Decision source can be selected at a time.

Analog Child Elements

Element	Type	Description
Event	32s	Triggering event: 0 – None (disabled) 1 – Measurements 2 – Software

Element	Type	Description
ScheduleEnabled	Bool	Enables scheduling.
CurrentMin	64f	Minimum current (mA).
CurrentMin.min	64f	Minimum value of minimum current (mA).
CurrentMin.max	64f	Maximum value of minimum current (mA).
CurrentMax	64f	Maximum current (mA).
CurrentMax.min	64f	Minimum value of maximum current (mA).
CurrentMax.max	64f	Maximum value of maximum current (mA).
CurrentInvalidEnabled	Bool	Enables special current value for invalid measurement value.
CurrentInvalid	64f	Current value for invalid measurement value (mA).
CurrentInvalid.min	64f	Minimum value for invalid current (mA).
CurrentInvalid.max	64f	Maximum value for invalid current (mA).
DataScaleMin	64f	Measurement value corresponding to minimum current.
DataScaleMax	64f	Measurement value corresponding to maximum current.
Delay	64f	Output delay (µs or mm, depending on delay domain defined below).
DelayDomain	32s	Output delay domain: 0 – Time (µs) 1 – Encoder (mm)
Measurement	32u	Selected measurement source.
Measurement.options	32u (CSV)	List of available measurement sources.



The delay specifies the time or position at which the analog output activates. Upon activation, there is an additional delay before the analog output settles at the correct value.

Serial

The Serial element defines settings for Serial output.

Serial Child Elements

Element	Type	Description
Protocol	32s	Serial protocol: 0 – ASCII 1 – Selcom
Protocol.options	32s (CSV)	List of available protocols.
Selcom	Section	See *Selcom* on the next page.
Ascii	Section	See *Ascii* on the next page.
Measurements	32u (CSV)	Selected measurement sources.
Measurements.options	32u (CSV)	List of available measurement sources.

Selcom

Selcom Child Elements

Element	Type	Description
Rate	32u	Output bit rate.
Rate.options	32u (CSV)	List of available rates.
Format	32s	Output format: 0 – 12-bit 1 – 12-bit with search 2 – 14-bit 3 – 14-bit with search
Format.options	32s (CSV)	List of available formats.
DataScaleMin	64f	Measurement value corresponding to minimum word value.
DataScaleMax	64f	Measurement value corresponding to maximum word value.
Delay	64u	Output delay in µs.

Ascii

Ascii Child Elements

Element	Type	Description
Delimiter	String	Field delimiter.
Terminator	String	Line terminator.
InvalidValue	String	String for invalid output.
CustomDataFormat	String	Custom data format.
CustomFormatEnabled	Bool	Enables custom data format.

Transform

The transformation component contains information about the physical system setup that is used to:

- Transform data from sensor coordinate system to another coordinate system (e.g., world)
- Define encoder resolution for encoder-based triggering
- Define the travel offset (Y offset) between sensors for staggered operation

You can access the Transform component of the active job as an XML file, either using path notation, via "_live.job/transform.xml", or directly via "_live.tfm".

You can access the Transform component in user-created job files in non-volatile storage, for example, "productionRun01.job/transform.xml". You can only access transformations in user-created job files using path notation.

See the following sections for the elements contained in this component.

Transformation Example:

```
<?xml version="1.0" encoding="UTF-8"?>
<Transform version="100">
  <EncoderResolution>1</EncoderResolution>
  <Speed>100</Speed>
  <Devices>
    <Device role="0">
      <X>-2.3650924829</X>
      <Y>0.0</Y>
      <Z>123.4966803469</Z>
      <XAngle>5.7478302588</XAngle>
      <YAngle>3.7078302555</XAngle>
      <ZAngle>2.7078302556</XAngle>
    </Device>
    <Device id="1">
      <X>0</X>
      <Y>0.0</Y>
      <Z>123.4966803469</Z>
      <XAngle>5.7478302588</XAngle>
      <YAngle>3.7078302555</XAngle>
      <ZAngle>2.7078302556</XAngle>
    </Device>
  </Devices>
</Transform>
```

The Transform element contains the alignment record for both the Main and the Buddy sensor.

Transform Child Elements

Element	Type	Description
@version	32u	Major transform version (100).
@versionMinor	32u	Minor transform version (0).
EncoderResolution	64f	Encoder Resolution (mm/tick).
Speed	64f	Travel Speed (mm/s).
Devices	(Collection)	Contains two Device elements.

Device

A Device element defines the transformation for a sensor. There is one entry element per sensor, identified by a unique role attribute (0 for main and 1 for buddy):

Device Child Elements

Element	Type	Description
@role	32s	Role of device described by this section: 0 – Main 1 – Buddy

Element	Type	Description
X	64f	Translation on the X axis (mm).
Y	64f	Translation on the Y axis (mm).
Z	64f	Translation on the Z axis (mm).
XAngle	64f	Rotation around the X axis (degrees).
YAngle	64f	Rotation around the Y axis (degrees).
ZAngle	64f	Rotation around the Z axis (degrees).

The rotation (counter-clockwise in the X-Z plane) is performed before the translation.

Part Models

Part models represent models created using the part matching feature.

You can access a model in the active job using path notation. For example, to access a model called scan.mdl, use "_live.job/scan.mdl".

You can access part models in user-created job files in non-volatile storage, for example, "productionRun01.job/model1.mdl". You can only access part models in user-created job files using path notation.

See the following sections for the elements contained in a model.

Part models contain the following subcomponents. You can access the subcomponents using path notation, for example, "productionRun01.job/myModel.mdl/config.xml".

Part Model Child Elements

Element	Type	Description
Configuration	config.xml	Model configuration XML. It is always present. (See *Configuration* on the next page.)
Edge Points	edge-height-top	Edge points for the top heightmap. (See *Edge Points* on the next page.)
Edge Points	edge-height-bottom	Edge points for the bottom heightmap.
Edge Points	edge-intensity-top	Edge points for the top intensity map.
Edge Points	edge-intensity-bottom	Edge points for the bottom intensity map.

The edge points file exists only when the model contains the source data for the edge points.

Edge Points

Edge Points Data

Field	Type	Offset	Description
id	16s	0	Sender ID -1 – Part matching
source	8s	2	Source 0 – Model 1 – Target
imageType	8s	3	Image type 0 – Height map 1 – Intensity map
imageSource	8s	4	Image source 0 – Top 1 – Bottom
width	32u	5	Width of model space, in units of xScale
length	32u	9	Length of model space, un units of yScale
xScale	32u	13	X scale (nm)
yScale	32u	17	Y scale (nm)
xOffset	32s	21	X offset (µm)
yOffset	32s	25	Y offset µm
zAngle	32s	29	Z rotation (microdegrees)
pointCount	32u	33	Number of edge points
points[pointCount]	(32u, 32u)	37	Edge points collection. Each point is a tuple of x and y values, in units of xScale and yScale, respectively.

Configuration

Delete this text and replace it with your own content.

Configuration Child Elements

Element	Type	Description
@version	32u	Major version (1).
@versionMinor	32u	Minor version (0).
Edges	Collection	Collection of Edge items (described below).
EdgeSensitivity	64f	Sensitivity recorded during model edges generation (read-only).
TransformedDataRegion	Region3d	Data region of the model.
ZAngle	64f	Additional rotation applied to the model (degrees).
TargetEdgeSensitivity	64f	Sensitivity used to generate target edges.
ImageType	32s	Selects type of image used to generate edges: 0 – Height map

Element	Type	Description
		1 – Intensity map
ImageType.options	32s (CSV)	List of available image types.

Protocols

Gocator supports protocols for communicating with sensors over Ethernet (TCP/IP) and serial output. For a protocol to output data, it must be enabled and configured in the active job.

Protocols Available over Ethernet

- Gocator
- Modbus
- EtherNet/IP
- ASCII

Protocols Available over Serial

- ASCII
- Selcom

Gocator Protocol

This section describes the TCP and UDP commands and data formats used by a client computer to communicate with Gocator sensors using the Gocator protocol. It also describes the connection types (Discovery, Control, Upgrade, Data, and Health), and data types. The protocol enables the client to:

- Discover Main and Buddy sensors on an IP network and re-configure their network addresses.
- Configure Main and Buddy sensors.
- Send commands to run sensors, provide software triggers, read/write files, etc.
- Receive data, health, and diagnostic messages.
- Upgrade firmware.

> The Gocator 4.x firmware uses mm, mm^2, mm^3, and degrees as standard units. In all protocols, values are scaled by 1000, as values in the protocols are represented as integers. This results in effective units of mm/1000, mm^2/1000, mm^3/1000, and deg/1000 in the protocols.

To use the Gocator protocol, it must be enabled and configured in the active job.

> Gocator sensors send UDP broadcasts over the network over the Internal Discovery channel (port 2016) at regular intervals during operation to perform peer discovery.

> The Gocator SDK provides open source C language libraries that implement the network commands and data formats defined in this section. For more information, see *Software Development Kit* on page 400.

For information on configuring the protocol using the Web interface, see *Ethernet Output* on page 230.

For information on job file structures (for example, if you wish to create job files programmatically), see *Job Files* on page 257.

Data Types

The table below defines the data types and associated type identifiers used in this section.

All values except for IP addresses are transmitted in little endian format (least significant byte first) unless stated otherwise. The bytes in an IP address "a.b.c.d" will always be transmitted in the order a, b, c, d (big endian).

Data Types

Type	Description	Null Value
char	Character (8-bit, ASCII encoding)	-
byte	Byte.	-
8s	8-bit signed integer.	-128
8u	8-bit unsigned integer.	255U
16s	16-bit signed integer.	-32768 (0x8000)
16u	16-bit unsigned integer.	65535 (0xFFFF)
32s	32-bit signed integer.	-2147483648 (0x80000000)
32u	32-bit unsigned integer.	4294967295 (0xFFFFFFFF)
64s	64-bit signed integer.	-9223372036854775808 (0x8000000000000000)
64u	64-bit unsigned integer.	18446744073709551615 (0xFFFFFFFFFFFFFFFF)
64f	64-bit floating point	-1.7976931348623157e+308
Point16s	Two 16-bit signed integers	-
Point64f	Two 64-bit floating point values	-
Point3d64f	Three 64-bit floating point values	-
Rect64f	Four 64-bit floating point values	-
Rect3d64f	Eight 64-bit floating point values	-

Commands

The following sections describe the commands available on the Discovery (page 328), Control (page 331), and Upgrade (page 359) channels.

When a client sends a command over the Control or Upgrade channel, the sensor sends a reply whose identifier is the same as the command's identifier. The identifiers are listed in the tables of each of the commands.

Status Codes

Each reply on the Discovery, Control, and Upgrade channels contains a *status* field containing a status code indicating the result of the command. The following status codes are defined:

Status Codes

Label	Value	Description
OK	1	Command succeeded.
Failed	0	Command failed.
Invalid State	-1000	Command is not valid in the current state.
Item Not Found	-999	A required item (e.g., file) was not found.
Invalid Command	-998	Command is not recognized.
Invalid Parameter	-997	One or more command parameters are incorrect.
Not Supported	-996	The operation is not supported.
Simulation Buffer Empty	-992	The simulation buffer is empty.

Discovery Commands

Sensors ship with the following default network configuration:

Setting	Default
DHCP	0 (disabled)
IP Address	192.168.1.10
Subnet Mask	255.255.255.0
Gateway	0.0.0.0 (disabled)

Use the Get Address and Set Address commands to modify a sensor's network configuration. These commands are UDP broadcast messages:

Destination Address	Destination Port
255.255.255.255	3220

When a sensor accepts a discovery command, it will send a UDP broadcast response:

Destination Address	Destination Port
255.255.255.255	Port of command sender.

The use of UDP broadcasts for discovery enables a client computer to locate a sensor when the senor and client are configured for different subnets. All you need to know is the serial number of the sensor in order to locate it on an IP network.

Get Address

The Get Address command is used to discover Gocator sensors across subnets.

Command

Field	Type	Offset	Description
length	64s	0	Command length.
type	64s	8	Command type (0x1).

Field	Type	Offset	Description
signature	64s	16	Message signature (0x0000504455494D4C)
deviceId	64s	24	Serial number of the device whose address information is queried. 0 selects all devices.

Reply

Field	Type	Offset	Description
length	64s	0	Reply length.
type	64s	8	Reply type (0x1001).
status	64s	16	Operation status.
signature	64s	24	Message signature (0x0000504455494D4C)
deviceId	64s	32	Serial number.
dhcpEnabled	64s	40	0 – Disabled 1 – Enabled
reserved[4]	byte	48	Reserved.
address[4]	byte	52	The IP address in left to right order.
reserved[4]	byte	56	Reserved.
subnetMask[4]	byte	60	The subnet mask in left to right order.
reserved[4]	byte	64	Reserved.
gateway[4]	byte	68	The gateway address in left to right order.
reserved[4]	byte	72	Reserved.
reserved[4]	byte	76	Reserved.

Set Address

The Set Address command modifies the network configuration of a Gocator sensor. On receiving the command, the Gocator will perform a reset. You should wait 30 seconds before re-connecting to the Gocator.

Command

Field	Type	Offset	Description
length	64s	0	Command length.
type	64s	8	Command type (0x2).
signature	64s	16	Message signature (0x0000504455494D4C)
deviceId	64s	24	Serial number of the device whose address information is queried. 0 selects all devices.
dhcpEnabled	64s	32	0 – Disabled 1 – Enabled
reserved[4]	byte	40	Reserved.
address[4]	byte	44	The IP address in left to right order.
reserved[4]	byte	48	Reserved.
subnetMask[4]	byte	52	The subnet mask in left to right order.
reserved[4]	byte	56	Reserved.

Field	Type	Offset	Description
gateway[4]	byte	60	The gateway address in left to right order.
reserved[4]	byte	64	Reserved.
reserved[4]	byte	68	Reserved.

Reply

Field	Type	Offset	Description
length	64s	0	Reply length.
type	64s	8	Reply type (0x1002).
status	64s	16	Operation status. For a list of status codes, see *Commands* on page 327.
signature	64s	24	Message signature (0x0000504455494D4C).
deviceId	64s	32	Serial number.

Get Info

The Get Info command is used to retrieve sensor information.

Command

Field	Type	Offset	Description
length	64s	0	Command length.
type	64s	8	Command type (0x5).
signature	64s	16	Message signature (0x0000504455494D4C).
deviceId	64s	24	Serial number of the device whose address information is queried. 0 selects all devices.

Reply

Field	Type	Offset	Description
length	64s	0	Reply length.
type	64s	8	Reply type (0x1005).
status	64s	16	Operation status. For a list of status codes, see *Commands* on page 327.
signature	64s	24	Message signature (0x0000504455494D4C).
attrCount	16u	32	Byte count of the attributes (begins after this field and ends before propertyCount).
id	32u	34	Serial number.
version	32u	38	Version as a 4-byte integer (encoded in little-endian).
uptime	64u	42	Sensor uptime (microseconds).
ipNegotiation	byte	50	IP negotiation type: 0 – Static 1 – DHCP

Field	Type	Offset	Description
addressVersion	byte	51	IP address version (always 4).
address[4]	byte	52	IP address.
reserved[12]	byte	56	Reserved.
prefixLength	32u	68	Subnet prefix length (in number of bits).
gatewayVersion	byte	72	Gateway address version (always 4).
gatewayAddress[4]	byte	73	Gateway address.
reserved[12]	byte	77	Reserved.
controlPort	16u	89	Control channel port.
upgradePort	16u	91	Upgrade channel port.
healthPort	16u	93	Health channel port.
dataPort	16u	95	Data channel port.
webPort	16u	97	Web server port.
propertyCount	8u	99	Number of sensor ID properties.
properties [propertyCount]	Property	100	List of sensor ID properties.

Property

Field	Type	Description
nameLength	8u	Length of the name.
name[nameLength]	char	Name string.
valueLength	8u	Length of the value.
value[valueLength]	char	Value string.

Control Commands

A client sends control commands for most operations over the Control TCP channel (port 3190).

The Control channel and the Upgrade channel (port 3192) can be connected simultaneously. For more information on Upgrade commands, see *Upgrade Commands* on page 359.

States

A Gocator system can be in one of three states: Conflict, Ready, or Running. The client sends the Start and Stop control commands to change the system's current state to Running and Ready, respectively. The sensor can also be configured to boot in either the Ready or Running state, by enabling or disabling autostart, respectively, using the Set Auto Start Enabled command.

In the Ready state, a sensor can be configured. In the Running state, a sensor responds to input signals, performs measurements, drives its outputs, and sends data messages to the client.

The state of the sensor can be retrieved using the Get States or Get System Info command.

The Conflict state indicates that a sensor has been configured with a Buddy sensor but the Buddy sensor is not present on the network. The sensor will not accept some commands until the Set Buddy command is used to remove the configured Buddy.

Progressive Reply

Some commands send replies progressively, as multiple messages. This allows the sensor to stream data without buffering it first, and allows the client to obtain progress information on the stream.

A progressive reply begins with an initial, standard reply message. If the *status* field of the reply indicates success, the reply is followed by a series of "continue" reply messages.

A continue reply message contains a block of data of variable size, as well as status and progress information. The series of continue messages is ended by either an error, or a continue message containing 0 bytes of data.

Protocol Version

The Protocol Version command returns the protocol version of the connected sensor.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4511)

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4511).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
majorVersion	8u	10	Major version.
minorVersion	8u	11	Minor version.

Get Address

The Get Address command is used to get a sensor address.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x3012)

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x3012).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
dhcpEnabled	byte	10	0 – DHCP not used 1 – DHCP used

Field	Type	Offset	Description
address[4]	byte	11	IP address (most significant byte first).
subnetMask[4]	byte	15	Subnet mask.
gateway[4]	byte	19	Gateway address.

Set Address

The Set Address command modifies the network configuration of a Gocator sensor. On receiving the command, the Gocator will perform a reset. You should wait 30 seconds before re-connecting to the Gocator.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x3013)
dhcpEnabled	byte	6	0 – DHCP not used 1 – DHCP used
address[4]	byte	7	IP address (most significant byte first).
subnetMask[4]	byte	11	Subnet mask.
gateway[4]	byte	15	Gateway address.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x3013).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Get System Info

The Get System Info command reports information for sensors that are visible in the system.

Firmware version refers to the version of the Gocator's firmware installed on each individual sensor. The client can upgrade the Gocator's firmware by sending the Start Upgrade command (see on page 360). Firmware upgrade files are available from the downloads section under the support tab on the LMI web site. For more information on getting the latest firmware, see *Firmware Upgrade* on page 77.

Every Gocator sensor contains factory backup firmware. If a firmware upgrade command fails (e.g., power is interrupted), the factory backup firmware will be loaded when the sensor is reset or power cycled. In this case, the sensors will fall back to the factory default IP address. To avoid IP address conflicts in a multi-sensor system, connect to one sensor at a time and re-attempt the firmware upgrade.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4002)

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4002).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
localInfo	Sensor Info	10	Info for this device.
remoteCount	32u	66	Number of discovered sensors.
remoteInfo [remoteCount]	Sensor Info	70	List of info for discovered sensors.

Sensor Info

Field	Type	Offset	Description
deviceId	32u	0	Serial number of the device.
address[4]	byte	4	IP address (most significant byte first).
modelName[32]	char	8	Model name.
firmwareVersion[4]	byte	40	Firmware version (most significant byte first).
state	32s	44	Sensor state -1 – Conflict 0 – Ready 1 – Running For more information on states, see *Control Commands* on page 331.
role	32s	48	Sensor role 0 – Main 1 – Buddy
buddyId	32s	52	Serial number of paired device (main or buddy). 0 if unpaired.

Get States

The Get States command returns various system states.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4525)

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.

Field	Type	Offset	Description
id	16u	4	Reply identifier (0x4525).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
count	32u	10	Number of state variables.
sensorState	32s	14	Sensor state -1 – Conflict 0 – Ready 1 – Running For more information on states, see *Control Commands* on page 331.
loginState	32s	18	Device login state 0 – No user 1 – Administrator 2 – Technician
alignmentReference	32s	22	Alignment reference 0 – Fixed 1 – Dynamic
alignmentState	32s	26	Alignment state 0 – Unaligned 1 – Aligned
recordingEnabled	32s	30	Whether or not recording is enabled 0 – Disabled 1 – Enabled
playbackSource	32s	34	Playback source 0 – Live data 1 – Recorded data
uptimeSec	32s	38	Uptime (whole seconds component)
uptimeMicrosec	32s	42	Uptime (remaining microseconds component)
playbackPos	32s	46	Playback position
playbackCount	32s	50	Playback frame count
autoStartEnabled	32s	54	Auto-start enable (boolean)

Log In/Out

The Log In/Out command is used to log in or out of a sensor.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4003).
userType	32s	6	Defines the user type 0 – None (log out) 1 – Administrator 2 – Technician
password[64]	char	10	Password (required for log-in only).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4003).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Change Password

The Change Password command is used to change log-in credentials for a user.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4004).
user type	32s	6	Defines the user type 0 – None (log out) 1 – Administrator 2 – Technician
password[64]	char	10	New password.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4004).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Passwords can only be changed if a user is logged in as an administrator.

Set Buddy

The Set Buddy command is used to assign or unassign a Buddy sensor.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4005).
buddyId	32u	6	Id of the sensor to acquire as buddy. Set to 0 to remove buddy.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4005).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

List Files

The List Files command returns a list of the files in the sensor's file system.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x101A).
extension[64]	char	6	Specifies the extension used to filter the list of files (does not include the "."). If an empty string is used, then no filtering is performed.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x101A).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
count	32u	10	Number of file names.
fileNames[count][64]	char	14	File names.

Copy File

The Copy File command copies a file from a source to a destination within the connected sensor (a .job file, a component of a job file, or another type of file; for more information, see *Job Files* on page 257).

To make a job active (to load it), copy a saved job to "_live.job".

To "save" the active job, copy from "_live.job" to another file.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.

Field	Type	Offset	Description
id	16u	4	Command identifier (0x101B).
source[64]	char	6	Source file name.
destination[64]	char	70	Destination file name.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x101B).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Read File

Downloads a file from the connected sensor (a .job file, a component of a job file, or another type of file; for more information, see *Job Files* on page 257).

To download the live configuration, pass "_live.job" in the *name* field.

To read the configuration of the live configuration only, pass "_live.job/config.xml" in the *name* field.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x1007).
name[64]	char	6	Source file name.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x1007).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
length	32u	10	File length.
data[length]	byte	14	File contents.

Write File

The Write File command uploads a file to the connected sensor (a .job file, a component of a job file, or another type of file; for more information, see *Job Files* on page 257).

To make a job file live, write to "_live.job". Except for writing to the live file, the file is permanently stored on the sensor.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x1006).
name[64]	char	6	Source file name.
length	32u	70	File length.
data[length]	byte	74	File contents.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x1006).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Delete File

The Delete File command removes a file from the connected sensor (a .job file, a component of a job file, or another type of file; for more information, see *Job Files* on page 257).

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x1008).
name[64]	char	6	Source file name.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x1008).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Get Default Job

The Get Default Job command gets the name of the job the sensor loads when it powers up.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4100).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4100).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
name[64]	char	10	The file name (null-terminated) of the job the sensor loads when it powers up.

Set Default Job

The Set Default Job command sets the job the sensor loads when it powers up.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4101).
fileName[64]	char	6	File name (null-terminated) of the job the sensor loads when it powers up.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4101).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Get Loaded Job

The Get Loaded Job command returns the name and modified status of the currently loaded file.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4512).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4512).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
fileName[64]	char	10	Name of the currently loaded job.
changed	8u	74	Whether or not the currently loaded job has been changed (1: yes; 0: no).

Get Alignment Reference

The Get Alignment Reference command is used to get the sensor's alignment reference.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4104).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4104).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
reference	32s	10	Alignment reference 0 – Fixed 1 – Dynamic

Set Alignment Reference

The Set Alignment Reference command is used to set the sensor's alignment reference.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4103).
reference	32s	6	Alignment reference 0 – Fixed 1 – Dynamic

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4103).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Clear Alignment

The Clear Alignment command clears sensor alignment.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4102).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4102).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Get Timestamp

The Get Timestamp command retrieves the sensor's timestamp, in clock ticks. All devices in a system are synchronized with the system clock; this value can be used for diagnostic purposes, or used to synchronize the start time of the system.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x100A).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x100A).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
timestamp	64u	10	Timestamp, in clock ticks.

Get Encoder

This command retrieves the current system encoder value.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x101C).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x101C).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
encoder	64s	10	Current encoder position, in ticks.

Reset Encoder

The Reset Encoder command is used to reset the current encoder value.

The encoder value can be reset only when the encoder is connected directly to a sensor. When the encoder is connected to the master, the value cannot be reset via this command.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x101E).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x101E).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Start

The Start command starts the sensor system (system enters the Running state). For more information on states, see *Control Commands* on page 331.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x100D).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x100D).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Scheduled Start

The scheduled start command starts the sensor system (system enters the Running state) at target time or encoder value (depending on the trigger mode). For more information on states, see *Control Commands* on page 331.

Command

Field	Type	Offset	Description
length	32u	0	Command size – in bytes.
id	16u	4	Command identifier (0x100F).
target	64s	6	Target scheduled start value (in ticks or µs, depending on the trigger type).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size – in bytes.
id	16u	4	Reply identifier (0x100F).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Stop

The Stop command stops the sensor system (system enters the Ready state). For more information on states, see *Control Commands* on page 331.

Command

Field	Type	Type	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x1001).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x1001).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Get Auto Start Enabled

The Get Auto Start Enabled command returns whether the system automatically starts after booting.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x452C).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x452C).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
enable	8u	10	0: disabled 1: enabled

Set Auto Start Enabled

The Set Auto Start Enabled command sets whether the system automatically starts after booting (enters Running state; for more information on states, see *Control Commands* on page 331).

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x452B).
enable	8u	6	0: disabled 1: enabled

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x452B).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Start Alignment

The Start Alignment command is used to start the alignment procedure on a sensor.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4600).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4600).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
opId	32u	10	Operation ID. Use this ID to correlate the command/reply on the Command channel with the correct Alignment Result message on the Data channel. A unique ID is returned each time the client uses this command.

Start Exposure Auto-set

The Start Exposure Auto-set command is used to start the exposure auto-set procedure on a sensor.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4601).
role	32s	6	Role of sensors to auto-set. 0 – Main 1 – Buddy

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4601).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
opId	32u	10	Operation ID. Use this ID to correlate the command/reply on the Command channel with the correct Exposure Calibration Result message on the Data channel. A unique ID is returned each time the client uses this command.

Software Trigger

The Software Trigger command causes the sensor to take a snapshot while in software mode and in the Running state.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4510).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4510).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Schedule Digital Output

The Schedule Digital Output command schedules a digital output event. The digital output must be configured to accept software-scheduled commands and be in the Running state. For more information on setting up digital output, see *Digital Output* on page 233.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4518).
index	16u	6	Index of the output (starts from 0).
target	64s	8	Specifies the time (clock ticks) when or position (µm) at which the digital output event should happen. The target value is ignored if ScheduleEnabled is set to false. (**Scheduled** is unchecked in **Digital** in the **Output** panel.) The output will be triggered immediately.
value	8u	16	Specifies the target state:

Field	Type	Offset	Description
			0 – Set to low (continuous) 1 – Set to high (continuous) Ignored if output type is pulsed.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4518).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Schedule Analog Output

The Schedule Analog Output command schedules an analog output event. The analog output must be configured to accept software-scheduled commands and be in the Running state. For information on setting up the analog output, see *Analog Output* on page 236.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4519).
index	16u	6	Index of the output. Must be 0.
target	64s	8	Specifies the time (clock ticks) or position (encoder ticks) of when the event should happen. The target value is ignored if ScheduleEnabled is set to false. (**Scheduled** is unchecked in **Analog** in the **Output** panel.) The output will be triggered immediately.
value	32s	16	Output current (micro-amperes).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4519).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.



The analog output takes about 75 us to reach 90% of the target value for a maximum change, then roughly another 40 us to settle completely..

Ping

The Ping command can be used to test the control connection. This command has no effect on sensors.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x100E).
timeout	64u	6	Timeout value (microseconds).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x100E).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.



If a non-zero value is specified for timeout, the client must send another ping command before the timeout elapses; otherwise the server would close the connection. The timer is reset and updated with every command.

Reset

The Reset command reboots the Main sensor and any Buddy sensors. All sensors will automatically reset 3 seconds after the reply to this command is transmitted.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4300).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4300).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Backup

The Backup command creates a backup of all files stored on the connected sensor and downloads the backup to the client.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x1013).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x1013).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
length	32u	10	Data length.
data[length]	byte	14	Data content.

Restore

The Restore command uploads a backup file to the connected sensor and then restores all sensor files from the backup.

> The sensor must be reset or power-cycled before the restore operation can be completed.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x1014).
length	32u	6	Data length.
data[length]	byte	10	Data content.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x1014).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Restore Factory

The Restore Factory command restores the connected sensor to factory default settings.

> The command erases the non-volatile memory of the main device.

This command has no effect on connected Buddy sensors.

Note that the sensor must be reset or power-cycled before the factory restore operation can be completed.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4301).

Field	Type	Offset	Description
resetIp	8u	6	Specifies whether IP address should be restored to default: 0 – Do not reset IP 1 – Reset IP

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4301).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Get Recording Enabled

The Get Recording Enabled command retrieves whether recording is enabled.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4517).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4517).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
enable	8u	10	0: disabled; 1: enabled.

Set Recording Enabled

The Set Recording Enabled command enables recording for replay later.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4516).
enable	8u	6	0: disabled; 1: enabled.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4516).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Clear Replay Data

The Clear Replay Data command clears the sensors replay data..

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4513).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4513).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Get Playback Source

The Get Playback Source command gets the data source for data playback.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4524).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4524).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
source	32s	10	Source 0 – Live 1 – Replay buffer

Set Playback Source

The Set Playback Source command sets the data source for data playback.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4523).
source	32s	6	Source 0 – Live 1 – Replay buffer

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4523).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Simulate

The Simulate command simulates the last frame if playback source is live, or the current frame if playback source is the replay buffer.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4522).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4522).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
bufferValid	8u	10	Whether or not the buffer is valid.

A reply status of -996 means that the current configuration (mode, sensor type, etc.) does not support simulation.

A reply status of -992 means that the simulation buffer is empty. Note that the buffer can be valid even if the simulation buffer is actually empty due to optimization choices. This scenario means that the simulation buffer would be valid if data were recorded.

Seek Playback

The Seek Playback command seeks to any position in the current playback dataset. The frame is then sent.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4503).
frame	32u	6	Frame index.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.

Field	Type	Offset	Description
id	16u	4	Reply identifier (0x4503).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Step Playback

The Step Playback command advances playback by one frame.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4501).
direction	32s	6	Define step direction 0 – Forward 1 – Reverse

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4501).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

When the system is running in the Replay mode, this command advances replay data (playback) by one frame. This command returns an error if no live playback data set is loaded. You can use the Copy File command to load a replay data set to _live.rec.

Playback Position

The Playback Position command retrieves the current playback position.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4502).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4502).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
Frame Index	32u	10	Current frame index (starts from 0).
Frame Count	32u	14	Total number of available frames/objects.

Clear Measurement Stats

The Clear Measurement Stats command clears the sensor's measurement statistics.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4526).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4526).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Clear Log

The Clear Log command clears the sensor's log.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x101D).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x101D).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Simulate Unaligned

The Simulate Unaligned command simulates data before alignment transformation.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x452A).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x452A).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Acquire

The Acquire command acquires a new scan.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4528).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4528).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.



The command returns after the scan has been captured and transmitted.

Acquire Unaligned

The Acquire Unaligned command acquires a new scan without performing alignment transformation.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4527).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4527).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.



The command returns after the scan has been captured and transmitted.

Create Model

The Create Model command creates a new part model from the active simulation scan.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4602).
modelName[64]	char	6	Name of the new model (without .mdl extension)

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4602).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Detect Edges

The Detect Edges command detects and updates the edge points of a part model.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4604).
modelName[64]	char	6	Name of the model (without .mdl extension)
sensitivity	16u	70	Sensitivity (in thousandths).

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4604).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Add Tool

The Add Tool command adds a tool to the live job.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4530).
typeName[64]	char	6	Type name of the tool (e.g., ProfilePosition)
name[64]	char	70	User-specified name for tool instance

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4530).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.

Add Measurement

The Add Measurement command adds a measurement to a tool instance.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4531).
toolIndex	32u	6	Index of the tool instance the new measurement is added to.
typeName[64]	char	10	Type name of the measurement (for example, X).
name[64]	char	74	User-specified name of the measurement instance.

Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4531).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.



This command can only be used with dynamic tools (tools with a dynamic list of measurements). The maximum number of instances for a given measurement type can be found in the ToolOptions node. For dynamic tools, the maximum count is greater than one, while for static tools it is one.

Read File (Progressive)

The progressive Read File command reads the content of a file as a stream.

This command returns an initial reply, followed by a series of "continue" replies if the initial reply's *status* field indicates success. The continue replies contain the actual data, and have 0x5000 as their identifier.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4529).
name[64]	char	6	Source file name.

Initial Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4529).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
progressTotal	32u	10	Progress indicating completion (100%).
progress	32u	14	Current progress.

Continue Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x5000).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
progressTotal	32u	10	Progress indicating completion (100%).
progress	32u	14	Current progress.
size	32u	18	Size of the chunk in byes.
data[size]	byte	22	Chunk data.

Export CSV (Progressive)

The progressive Export CSV command exports replay data as a CSV stream.

This command returns an initial reply, followed by a series of "continue" replies if the initial reply's *status* field indicates success. The continue replies contain the actual data, and have 0x5000 as their identifier.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4507).

Initial Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4507).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
progressTotal	32u	10	Progress indicating completion (100%).
progress	32u	14	Current progress.

Continue Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x5000).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
progressTotal	32u	10	Progress indicating completion (100%).
progress	32u	14	Current progress.
size	32u	18	Size of the chunk in byes.
data[size]	byte	22	Chunk data.

All recorded range or profile data is exported to the CSV stream. Only the current surface scan, as determined by the playback position, is exported to the CSV stream.

Export Bitmap (Progressive)

The progressive Export Bitmap command exports replay data as a bitmap stream.

This command returns an initial reply, followed by a series of "continue" replies if the initial reply's *status* field indicates success. The continue replies contain the actual data, and have 0x5000 as their identifier.

Command

Field	Type	Offset	Description
length	32u	0	Command size including this field, in bytes.
id	16u	4	Command identifier (0x4508).
type	32s	6	Data type: 0 – Range or video 1 – Intensity
source	32s	10	Data source to export.

Initial Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x4508).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
progressTotal	32u	10	Progress indicating completion (100%).
progress	32u	14	Current progress.

Continue Reply

Field	Type	Offset	Description
length	32u	0	Reply size including this field, in bytes.
id	16u	4	Reply identifier (0x5000).
status	32s	6	Reply status. For a list of status codes, see *Commands* on page 327.
progressTotal	32u	10	Progress indicating completion (100%).
progress	32u	14	Current progress.
size	32u	18	Size of the chunk in byes.
data[size]	byte	22	Chunk data.

Upgrade Commands

A client sends firmware upgrade commands over the Upgrade TCP channel (port 3192).

The Control channel (port 3190) and the Upgrade channel can be connected simultaneously. For more information on Control commands, see *Control Commands* on page 331.

After connecting to a Gocator sensor, you can use the Protocol Version command to retrieve the protocol version. Protocol version refers to the version of the Gocator Protocol supported by the *connected sensor* (the sensor to which a command connection is established), and consists of major and minor parts. The minor part is updated when backward-compatible additions are made to the Gocator Protocol. The major part is updated when breaking changes are made to the Gocator Protocol.

Start Upgrade

The Start Upgrade command begins a firmware upgrade for the sensors in a system. All sensors automatically reset 3 seconds after the upgrade process is complete.

Command

Field	Type	Offset	Description
length	64s	0	Command size including this field, in bytes.
id	64s	8	Command identifier (0x0000).
length	64s	16	Length of the upgrade package (bytes).
data[length]	byte	24	Upgrade package data.

Reply

Field	Type	Offset	Description
length	64s	0	Reply size including this field, in bytes.
id	64s	8	Reply identifier (0x0000).
status	64s	16	Reply status. For a list of status codes, see *Commands* on page 327.

Start Upgrade Extended

The Start Upgrade Extended command begins a firmware upgrade for the sensors in a system. All sensors automatically reset 3 seconds after the upgrade process is complete.

Command

Field	Type	Offset	Description
length	64s	0	Command size including this field, in bytes.
id	64s	8	Command identifier (0x0003).
skipValidation	64s	16	Whether or not to skip validation (0 – do not skip, 1 – skip).
length	64s	24	Length of the upgrade package (bytes).
data[length]	byte	32	Upgrade package data.

Reply

Field	Type	Offset	Description
length	64s	0	Reply size including this field, in bytes.
id	64s	8	Reply identifier (0x0003).
status	64s	16	Reply status. For a list of status codes, see *Commands* on page 327.

Get Upgrade Status

The Get Upgrade Status command determines the progress of a firmware upgrade.

Command

Field	Type	Offset	Description
length	64s	0	Command size including this field, in bytes.
id	64s	8	Command identifier (0x1)

Reply

Field	Type	Offset	Description
length	64s	0	Reply size including this field, in bytes.
id	64s	8	Reply identifier (0x1).
status	64s	16	Reply status. For a list of status codes, see *Commands* on page 327.
state	64s	24	Upgrade state: -1 – Failed 0 – Completed 1 – Running 2 – Completed, but should run again
progress	64s	32	Upgrade progress (valid when in the Running state)

Get Upgrade Log

The Get Upgrade Log command can retrieve an upgrade log in the event of upgrade problems.

Command

Field	Type	Offset	Description
length	64s	0	Command size including this field, in bytes.
id	64s	8	Command identifier (0x2)

Reply

Field	Type	Offset	Description
length	64s	0	Reply size including this field, in bytes.
id	64s	8	Reply identifier (0x2).
status	64s	16	Reply status. For a list of status codes, see *Commands* on page 327.
length	64s	24	Length of the log (bytes).
log[length]	char	32	Log content.

Results

The following sections describe the results (data and health) that Gocator sends.

Data Results

A client can receive data messages from a Gocator sensor by connecting to the Data TCP channel (port 3196).

The Data channel and the Health channel (port 3194) can be connected at the same time. The sensor accepts multiple connections on each port. For more information on the Health channel, see *Health Results* on page 371.

Messages that are received on the Data and Health channels use a common structure, called Gocator Data Protocol (GDP). Each GDP message consists of a 6-byte header, containing *size* and *control* fields, followed by a variable-length, message-specific content section. The structure of the GDP message is defined below.

Gocator Data Protocol

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last Message flag Bits 0-14: Message type identifier. (See individual data result sections.)

GDP messages are always sent in groups. The Last Message flag in the *control* field is used to indicate the final message in a group. If there is only one message per group, this bit will be set in each message.

Stamp

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 1.
count (C)	32u	6	Count of stamps in this message.
size	16u	10	Stamp size, in bytes (min: 56, current: 56).
source	8u	12	Source (0 – Main, 1 – Buddy).
reserved	8u	13	Reserved.
stamps[C]	Stamp	14	Array of stamps (see below).

Stamp

Field	Type	Offset	Description
frameIndex	64u	0	Frame index (counts up from zero).
timestamp	64u	8	Timestamp (µs).
encoder	64s	16	Current encoder value (ticks).
encoderAtZ	64s	24	Encoder value latched at z/index mark (ticks).
status	64u	32	Bit field containing various frame information: Bit 0: sensor digital input state

Field	Type	Offset	Description
			Bit 4: master digital input state Bit 8-9: inter-frame digital pulse trigger (Master digital input if master is connected, otherwise sensor digital input. Value is cleared after each frame and clamped at 3 if more than 3 pulses are received).
serialNumber	32u	40	Sensor serial number. (In a dual-sensor system, the serial number of the main sensor.)
reserved[2]	32u	44	Reserved.

Video

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 2.
attributesSize	16u	6	Size of attributes, in bytes (min: 20, current: 20).
height (H)	32u	8	Image height, in pixels.
width (W)	32u	12	Image width, in pixels.
pixelSize	8u	16	Pixel size, in bytes.
pixelFormat	8u	17	Pixel format: 1 – 8-bit greyscale 2 – 8-bit color filter 3 – 8-bits-per-channel color (B, G, R, X)
colorFilter	8u	18	Color filter array alignment: 0 – None 1 – Bayer BG/GR 2 – Bayer GB/RG 3 – Bayer RG/GB 4 – Bayer GR/BG
source	8u	19	Source 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
cameraIndex	8u	20	Camera index.
exposureIndex	8u	21	Exposure index.
exposure	32u	22	Exposure (ns).
flippedX	8u	26	Indicates whether the video data must be flipped horizontally to

Field	Type	Offset	Description
			match up with profile data.
flippedY	8u	27	Indicates whether the video data must be flipped vertically to match up with profile data.
pixels[H][W]	(Variable)	28	Image pixels. (Depends on pixelSize above.)

Profile

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 5.
attributeSize	16u	6	Size of attributes, in bytes (min: 32, current: 32).
count (C)	32u	8	Number of profile arrays.
width (W)	32u	12	Number of points per profile array.
xScale	32u	16	X scale (nm).
zScale	32u	20	Z scale (nm).
xOffset	32s	24	X offset (µm).
zOffset	32s	28	Z offset (µm).
source	8u	32	Source 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
exposure	32u	33	Exposure (ns).
cameraIndex	8u	37	Camera index.
reserved[2]	8u	38	Reserved.
ranges[C][W]	Point16s	40	Profile ranges.

Resampled Profile

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 6.
attributeSize	16u	6	Size of attributes, in bytes (min: 32, current: 32).
count (C)	32u	8	Number of profile arrays.
width (W)	32u	12	Number of points per profile array.

Field	Type	Offset	Description
xScale	32u	16	X scale (nm).
zScale	32u	20	Z scale (nm).
xOffset	32s	24	X offset (µm).
zOffset	32s	28	Z offset (µm).
source	8u	32	Source 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
exposure	32u	33	Exposure (ns).
reserved[3]	8u	37	Reserved.
ranges[C][W]	16s	40	Profile ranges.

Profile Intensity

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 7.
attributesSize	16u	6	Size of attributes, in bytes (min: 24, current: 24).
count (C)	32u	8	Number of profile intensity arrays.
width (W)	32u	12	Number of points per profile intensity array.
xScale	32u	16	X scale (nm).
xOffset	32s	20	X offset (µm).
source	8u	24	Source 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
exposure	32u	25	Exposure (ns).
reserved[3]	8u	29	Reserved.
points[C][W]	8u	32	Intensity arrays.

Surface

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag.

Field	Type	Offset	Description
			Bits 0-14: Message type identifier. For this message, set to 8.
attributeSize	16u	6	Size of attributes, in bytes (min: 40, current: 40).
length (L)	32u	8	Surface length (rows).
length (W)	32u	12	Surface width (columns).
xScale	32u	16	X scale (nm).
yScale	32u	20	Y scale (nm).
zScale	32u	24	Z scale (nm).
xOffset	32s	28	X offset (µm).
yOffset	32s	32	Y offset (µm).
zOffset	32s	36	Z offset (µm).
source	8u	40	Source 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
exposure	32u	41	Exposure (ns).
rotation	32s	45	Rotation (microdegrees).
reserved[3]	8u	49	Reserved.
ranges[L][W]	16s	52	Surface ranges.

Surface Intensity

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 9.
attributeSize	16u	6	Size of attributes, in bytes (min: 32, current: 32).
length (L)	32u	8	Surface length (rows).
width (W)	32u	12	Surface width (columns).
xScale	32u	16	X scale (nm).
yScale	32u	20	Y scale (nm).
xOffset	32s	24	X offset (µm).
yOffset	32s	28	Y offset (µm).
source	8u	32	Source 0 – Top 1 – Bottom 2 – Top Left

Field	Type	Offset	Description
			3 – Top Right
exposure	32u	33	Exposure (ns).
reserved[3]	8u	37	
intensities[H][W]	8u	40	Surface intensities.

Surface Section

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 20.
attributeSize	16u	6	Size of attributes, in bytes (min: 45, current: 45).
count (C)	32u	8	Number of profile arrays.
width (W)	32u	12	Number of points per profile array.
xScale	32u	16	X scale (nm).
zScale	32u	20	Z scale (nm).
xOffset	32s	24	X offset (µm).
zOffset	32s	28	Z offset (µm).
source	8u	32	Source 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
sectionId	32u	33	Section Id
exposure	32u	37	Exposure (ns).
poseAngle	32s	41	Z angle of the pose (microdegrees).
poseX	32s	45	X offset of the pose (µm)
poseY	32s	49	Y offset of the pose (µm)
ranges[C][W]	16s	53	Profile ranges.



The pose field can be used to transform the section data into the surface frame of reference, via a rotation and then a translation.

Surface Section Intensity

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 21.

Field	Type	Offset	Description
attributesSize	16u	6	Size of attributes, in bytes (min: 37, current: 37).
count (C)	32u	8	Number of profile intensity arrays
width (W)	32u	12	Number of points per profile intensity array
xScale	32u	16	X scale (nm).
xOffset	32s	20	X offset (µm).
source	8u	24	Source 0 – Top 1 – Bottom 2 – Top Left 3 – Top Right
sectionId	32u	25	Section Id.
exposure	32u	29	Exposure (ns).
poseAngle	32s	33	Z angle of the pose (microdegrees).
poseX	32s	37	X offset of the pose (µm).
poseY	32s	41	Y offset of the pose (µm).
points[C][W]	8u	45	Intensity arrays.

Measurement

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 10.
count (C)	32u	6	Count of measurements in this message.
reserved[2]	8u	10	Reserved.
id	16u	12	Measurement identifier.
measurements[C]	Measurement	14	Array of measurements (see below).

Measurement

Field	Type	Offset	Description
value	32s	0	Measurement value.
decision	8u	4	Measurement decision bitmask. Bit 0: 1 – Pass 0 – Fail Bits 1-7: 0 – Measurement value OK 1 – Invalid value

Field	Type	Offset	Description
			2 – Invalid anchor
reserved[3]	8u	5	Reserved.

Operation Result

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 11.
attributesSize	16u	6	Size of attributes, in bytes (min: 8, current: 8).
opId	32u	8	Operation ID.
status	32s	12	Operation status. 1 – OK 0 – General failure -1 – No data in the field of view for stationary alignment -2 – No profiles with sufficient data for line fitting for travel alignment -3 – Invalid target detected. Examples include: - Calibration disk diameter too small. - Calibration disk touches both sides of the field of view. - Too few valid data points after outlier rejection. -4 – Target detected in an unexpected position. -5 – No reference hole detected in bar alignment. -6 – No change in encoder value during travel calibration -988 – User aborted -993 – Timed out -997 – Invalid parameter

Exposure Calibration Result

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 12.
attributesSize	16u	6	Size of attributes, in bytes (min: 12, current: 12).
opId	32u	8	Operation ID.
status	32s	12	Operation status.
exposure	32s	16	Exposure result (ns).

Edge Match Result

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 16.
decision	byte	6	Overall match decision.
xOffset	32s	7	Target x offset in model space (µm).
yOffset	32s	11	Target y offset in model space (µm).
zAngle	32s	15	Target z rotation in model space (microdegrees).
quality	32s	19	Match quality (thousandth).
qualityDecision	byte	23	Quality match decision.
reserved[2]	byte	24	Reserved.

Bounding Box Match Result

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 17.
decision	byte	6	Overall match decision.
xOffset	32s	7	Target x offset in model space (µm).
yOffset	32s	11	Target y offset in model space (µm).
zAngle	32s	15	Target z rotation in model space (microdegrees).
width	32s	19	Width axis length (µm)
widthDecision	8u	23	Width axis decision.
length	32s	24	Length axis length (µm)
lengthDecision	8u	28	Length axis decision.

Ellipse Match Result

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. For this message, set to 18.
decision	byte	6	Overall match decision.
xOffset	32s	7	Target x offset in model space (µm).
yOffset	32s	11	Target y offset in model space (µm).
zAngle	32s	15	Target z rotation in model space (microdegrees).

Field	Type	Offset	Description
minor	32s	19	Minor axis length (µm)
minorDecision	8u	23	Minor axis decision.
major	32s	24	Major axis length (µm)
majorDecision	8u	28	Major axis decision.

Health Results

A client can receive health messages from a Gocator sensor by connecting to the Health TCP channel (port 3194).

The Data channel (port 3196) and the Health channel can be connected at the same time. The sensor accepts multiple connections on each port. For more information on the Data channel, see *Data Results* on page 362.

Messages that are received on the Data and Health channels use a common structure, called Gocator Data Protocol (GDP). Each GDP message consists of a 6-byte header, containing *size* and *control* fields, followed by a variable-length, message-specific content section. The structure of the GDP message is defined below.

Gocator Data Protocol

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last Message flag Bits 0-14: Message type identifier. (See individual data result sections.)

GDP messages are always sent in groups. The Last Message flag in the *control* field is used to indicate the final message in a group. If there is only one message per group, this bit will be set in each message.

A Health Result contains a single data block for health *indicators*. Each indicator reports the current status of some aspect of the sensor system, such as CPU usage or network throughput.

Health Result Header

Field	Type	Offset	Description
size	32u	0	Count of bytes in message (including this field).
control	16u	4	Bit 15: Last message flag. Bits 0-14: Message type identifier. Always 0.
count (C)	32u	6	Count of indicators in this message.
source	8u	10	Source (0 – Main, 1 – Buddy).
reserved[3]	8u	11	Reserved
indicators[C]	Indicator	14	Array of indicators (see format below).

The health indicators block contains a 2 dimensional array of indicator data. Each row in the array has the following format:

Indicator Format

Field	Type	Offset	Description
id	32u	0	Unique indicator identifier (see below).
instance	32u	4	Indicator instance.
value	64s	8	Value (identifier-specific meaning).

The following health indicators are defined for Gocator sensor systems:

Health Indicators

Indicator	Id	Instance	Value
Encoder Value	1003	-	Current system encoder tick.
Encoder Frequency	1005	-	Current system encoder frequency (ticks/s).
App Version	2000	-	Firmware application version.
Uptime	2017	-	Time elapsed since node boot-up or reset (seconds).
Laser safety status	1010	-	0 if laser is disabled; 1 if enabled.
Internal Temperature	2002	-	Internal temperature (centidegrees Celsius).
Projector Temperature	2404	-	Projector module temperature (centidegrees Celsius). Only available on projector based devices.
Control Temperature	2028	-	Control module temperature (centidegrees Celsius). Available only on 3B-class devices.
Memory Usage	2003	-	Amount of memory currently used (bytes).
Memory Capacity	2004	-	Total amount of memory available (bytes).
Storage Usage	2005	-	Amount of non-volatile storage used (bytes).
Storage Capacity	2006	-	Total amount of non-volatile storage available (bytes).
CPU Usage	2007	-	CPU usage (percentage of maximum).
Net Out Capacity	2009	-	Total available outbound network throughput (bytes/s).
Net Out Link Status	2034	-	Current Ethernet link status.
Sync Source	2043	-	Gocator synchronization source. 1 - FireSync Master device 2 - Sensor
Digital Inputs	2024	-	Current digital input status (one bit per input).
Event Count	2102	-	Total number of events triggered.
Camera Search Count	2217	-	Number of search states. (Only important when tracking is enabled.)
Camera Trigger Drops	2201	-	Number of dropped triggers.

Indicator	Id	Instance	Value
Analog Output Drops	21014 (previously 2501)	Output Index	Number of dropped outputs.
Digital Output Drops	21015 (previously 2601)	Output Index	Number of dropped outputs.
Serial Output Drops	21016 (previously 2701)	Output Index	Number of dropped outputs.
Sensor State	20000	-	Gocator sensor state. -1 – Conflict 0 – Ready 1 – Running
Current Sensor Speed	20001	-	Current sensor speed. (Hz)
Maximum Speed	20002	-	The sensor's maximum speed.
Spot Count	20003	-	Number of found spots in the last profile.
Max Spot Count	20004	-	Maximum number of spots that can be found.
Scan Count	20005	-	Number of surfaces detected from a top device.
Master Status	20006	0 for main 1 for buddy	Master connection status: 0 – Not connected 1 – Connected The indicator with instance = buddy does not exist if the buddy is not connected.
Cast Start State	20007		The state of the second digital input. (NOTE: Only available on XLine capable licensed devices)
Laser Overheat	20020	-	Indicates whether laser overheat has occurred. 0 – Has not overheated 1 – Has overheated Only available on certain 3B laser devices.
Laser Overheat Duration	20021	-	The length of time in which the laser overheating state occurred. Only available on certain 3B laser devices.
Playback Position	20023	-	The current replay playback position.
Playback Count	20024	-	The number of frames present in the replay.
FireSync Version	20600	-	The FireSync version used by the Gocator build.
Processing Drops	21000	-	Number of dropped frames. The sum of various processing drop related indicators.

Indicator	Id	Instance	Value
Last IO Latency	21001	-	Last delay from camera exposure to when rich IO scheduling occurs. Valid only if rich IO is enabled.
Max IO Latency	21002	-	Maximum delay from camera exposure to when rich IO scheduling occurs. Valid only if rich IO is enabled. Reset on start.
Ethernet Output	21003	-	Number of bytes transmitted.
Ethernet Rate	21004	-	The average number of bytes per second being transmitted.
Ethernet Drops	21005	-	Number of dropped Ethernet packets.
Digital Output Pass	21006	Output Index	Number of pass digital output pulse.
Digital Output Fail	21007	Output Index	Number of fail digital output pulse.
Trigger Drops	21010		Number of dropped triggers. The sum of various triggering-related drop indicators.
Output Drops	21011		Number of dropped output data. The sum of all output drops (analog, digital, serial, host server, and ASCII server).
Host Server Drops	21012		The number of bytes dropped by the host data server. Not currently emitted.
ASCII Server Drops	21013		The number of bytes dropped by the ASCII Ethernet data server. Not currently emitted.
Range Valid Count	21100	-	Number of valid ranges.
Range Invalid Count	21101	-	Number of invalid ranges.
Anchor Invalid Count	21200	-	Number of frames with anchoring invalid.
Z-Index Drop Count	22000	-	The number of dropped surfaces due to a lack of z-encoder pulse during rotational part detection.
Value	30000	Measurement ID	Measurement Value.
Pass	30001	Measurement ID	Number of pass decision.
Fail	30002	Measurement ID	Number of fail decision.
Max	30003	Measurement ID	Maximum measurement value.
Min	30004	Measurement ID	Minimum measurement value.
Average	30005	Measurement ID	Average measurement value.
Std. Dev.	30006	Measurement ID	Measurement value standard deviation.
Invalid Count	30007	Measurement ID	Number of invalid values.
Overflow	30008	Measurement ID	Number of times this measurement has overflown on any output. Multiple simultaneous overflows result in only a sinlge increment to this counter. Overflow conditions include:

Indicator	Id	Instance	Value
			-Value exceeds bit representation available for given protocol -Analog output (mA) falls outside of acceptable range (0-20 mA) When a measurement value overflow occurs, the value is set to the null value appropriate for the given protocol's measurement value output type. The Overflow health indicator increments.

Additional undocumented indicator values may be included in addition to the indicators defined above.

Modbus Protocol

Modbus is designed to allow industrial equipment such as Programmable Logic Controllers (PLCs), sensors, and physical input/output devices to communicate over an Ethernet network.

Modbus embeds a Modbus frame into a TCP frame in a simple manner. This is a connection-oriented transaction, and every query expects a response.

This section describes the Modbus TCP commands and data formats. Modbus TCP communication lets the client:

- Switch jobs.
- Align and run sensors.
- Receive measurement results, sensor states, and stamps.

To use the Modbus protocol, it must be enabled and configured in the active job.

> The Gocator 4.x firmware uses mm, mm^2, mm^3, and degrees as standard units. In all protocols, values are scaled by 1000, as values in the protocols are represented as integers. This results in effective units of mm/1000, mm^2/1000, mm^3/1000, and deg/1000 in the protocols.

If buffering is enabled with the Modbus protocol, the PLC must read the Buffer Advance output register (see on page 379) to advance the queue before reading the measurement results.

For information on configuring the protocol using the Web interface, see *Ethernet Output* on page 230.


Concepts

A PLC sends a command to start each Gocator. The PLC then periodically queries each Gocator for its latest measurement results. In Modbus terminology, the PLC is a Modbus Client. Each Gocator is a Modbus Server which serves the results to the PLC.

The Modbus protocol uses TCP for connection and messaging. The PLC makes a TCP connection to the Gocator on port 502. Control and data messages are communicated on this TCP connection. Up to eight clients can be connected to the Gocator simultaneously. A connection closes after 10 minutes of inactivity.

Messages

All Modbus TCP messages consist of an MBAP header (Modbus Application Protocol), a function code, and a data payload.

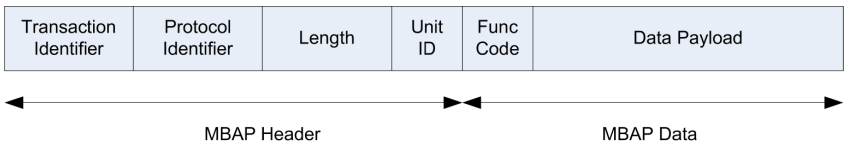

The MBAP header contains the following fields:

Modbus Application Protocol Header

Field	Length (Bytes)	Description
Transaction ID	2	Used for transaction pairing. The Modbus Client sets the value and the Server (Gocator) copies the value into its responses.
Protocol ID	1	Always set to 0.
Length	1	Byte count of the rest of the message, including the Unit identifier and data fields.
Unit ID	1	Used for intra-system routing purpose. The Modbus Client sets the value and the Server (Gocator) copies the value into its responses.

Modbus Application Protocol Specification describes the standard function codes in detail. Gocator supports the following function codes:

Modbus Function Code

Function Code	Name	Data Size (bits)	Description
3	Read Holding Registers	16	Read multiple data values from the sensor.
4	Read Input Registers	16	Read multiple data values from the sensor.
6	Write Single Register	16	Send a command or parameter to the sensor.
16	Write Multiple Registers	16	Send a command and parameters to the sensor.

The data payload contains the registers that can be accessed by Modbus TCP messages. If a message accesses registers that are invalid, a reply with an exception is returned. Modbus Application Protocol Specification defines the exceptions and describes the data payload format for each function code.

The Gocator data includes 16-bit, 32-bit, and 64-bit data. All data are sent in big endian format, with the 32-bit and 64-bit data spread out into two and four consecutive registers.

32-bit Data Format

Register	Name	Bit Position
0	32-bit Word 1	31 .. 16
1	32-bit Word 0	15 .. 0

64-bit Data Format

Register	Name	Bit Position
0	64-bit Word 3	63 .. 48
1	64-bit Word 2	47 .. 32
2	64-bit Word 1	31 .. 16
3	64-bit Word 0	15 .. 0

Registers

Modbus registers are 16 bits wide and are either control registers or output registers.

Control registers are used to control the sensor states (e.g., start, stop, or calibrate a sensor).

The output registers report the sensor states, stamps, and measurement values and decisions. You can read multiple output registers using a single Read Holding Registers or a single Read Input Registers command. Likewise, you can control the state of the sensor using a single Write Multiple Register command.

Control registers are write-only, and output registers are read-only.

Register Map Overview

Register Address	Name	Read/Write	Description
0 - 124	Control Registers	WO	Registers for Modbus commands. See *Control Registers* below for detailed descriptions.
300 - 899	Sensor States	RO	Report sensor states. See *State* on the next page for detailed descriptions.
900 - 999	Stamps	RO	Return stamps associated with each profile or surface. See *State* on the next page for detailed descriptions.
1000 - 1060	Measurements & Decisions	RO	20 measurement and decision pairs. See *Measurement Registers* on page 380 for detailed descriptions.

Control Registers

Control registers are used to operate the sensor. Register 0 stores the command to be executed. Registers 1 to 21 contain parameters for the commands. The Gocator executes a command when the value in Register 0 is changed. To set the parameters before a command is executed, you should set up the parameters and the command using a single Multiple Write register command.

Control Register Map

Register Address	Name	Read/Write	Description
0	Command Register	WO	Command register. See the Command Register Values table below for more information.
1 – 21	Job Filename	WO	Null-terminated filename. Each 16-bit register holds a single character. Only used for Load Job Command. Specifies the complete filename, including the file extension ".job".

The values used for the Command Register are described below.

Command Register Values

Value	Name	Description
0	Stop running	Stop the sensor. No effect if sensor is already stopped.
1	Start Running	Start the sensor. No effect if sensor is already started.
2	Align (stationary target)	Start the alignment process. State register 301 will be set to 1 (busy)

Value	Name	Description
		until the alignment process is complete.
3	Align (moving target)	Start alignment process and also calibrate encoder resolution. State register 301 will be set to 1 (busy) until the motion calibration process is complete.
4	Clear Alignment	Clear the alignment.
5	Load Job	Activate a job file. Registers 1 - 21 specify the filename.

Output Registers

Output registers are used to output states, stamps, and measurement results. Each register address holds a 16-bit data value.

State

State registers report the current sensor state.

State Register Map

Register Address	Name	Type	Description
300	Stopped / Running		Sensor State: 0 - Stopped 1 - Running
301	Busy		Busy State: 0 - Not busy 1 - Busy Registers 302 to 363 below are only valid when the Busy State is not Busy
302	Alignment State		Current Alignment State: 0 - Not aligned 1- Aligned
303 – 306	Encoder Value	64s	Current Encoder value (ticks).
307 – 310	Time	64s	Current time (µs).
311	Job File Name Length	16u	Number of characters in the current job file name.
312 – 371	Live Job Name		Current Job Name. Name of currently loaded job file. Does not include the extension. Each 16-bit register contains a single character.

Stamp

Stamps contain trigger timing information used for synchronizing a PLC's actions. A PLC can also use this information to match up data from multiple Gocator sensors.

In Profile mode, the stamps are updated after each profile is processed. In Surface mode, the stamps are updated after each surface has been processed.

Stamp Register Map

Register Address	Name	Type	Description
976	Buffer Advance		If buffering is enabled this address must be read by the PLC Modbus client first to advance the buffer. After the buffer advance read operation, the Modbus client can read the updated Measurements & Decisions in addresses 1000-1060.
977	Buffer Counter		Number of buffered messages currently in the queue.
978	Buffer Overflow		Buffer Overflow Indicator: 0 - No overflow 1 - Overflow
979	Inputs		Digital input state.
980	zPosition High	64s	Encoder value when the index is last triggered.
981	zPosition		
982	zPosition		
983	zPosition Low		
984	Exposure High	32u	Laser exposure (µs).
985	Exposure Low		
986	Temperature High	32u	Sensor temperature in degrees Celcius * 100 (centidegrees).
987	Temperature Low		
988	Position High	64s	Encoder position
989	Position		
990	Position		
991	Position Low		
992	Time Low	64u	Timestamp (µs).
993	Time		
994	Time		
995	Time Low		
996	Frame Index High	64u	Frame counter. Each new sample is assigned a frame number.
997	Frame Index		
998	Frame Index		
999	Fame Index Low		

Measurement Registers

Measurement results are reported in pairs of values and decisions. Measurement values are 32 bits wide and decisions are 8 bits wide.

The measurement ID defines the register address of each pair. The register address of the first word can be calculated as (1000 + 3 * ID). For example, a measurement with ID set to 4 can be read from registers 1012 (high word) and, 1013 (low word), and the decision at 1015.

In Profile mode, the measurement results are updated after each profile is processed. In Surface mode, the measurement results are updated after each discrete part has been processed.

Measurement Register Map

Register Address	Name	Type	Description
1000	Measurement 0 High	32s	Measurement value in µm (0x80000000 if invalid)
1001	Measurement 0 Low		
1002	Decision 0	16u	Measurement decision. A bit mask, where: Bit 0: 1 - Pass 0 - Fail Bits 1-7: 0 - Measurement value OK 1 - Invalid value 2 - Invalid anchor
1003	Measurement 1 High		
1004	Measurement 1 Low		
1005	Decision 1		
1006	Measurement 2 High		
1007	Measurement 2 Low		
1008	Decision 2		
...	...	...	...
1057	Measurement 19 High		
1058	Measurement 19 Low		
1059	Decision 19		

EtherNet/IP Protocol

EtherNet/IP is an industrial protocol that allows bidirectional data transfer with PLCs. It encapsulates the object-oriented Common Industrial Protocol (CIP).

This section describes the EtherNet/IP messages and data formats. EtherNet/IP communication enables the client to:

- Switch jobs.
- Align and run sensors.
- Receive sensor states, stamps, and measurement results.

To use the EtherNet/IP protocol, it must be enabled and configured in the active job.

> The Gocator 4.x firmware uses mm, mm^2, mm^3, and degrees as standard units. In all protocols, values are scaled by 1000, as values in the protocols are represented as integers. This results in effective units of mm/1000, mm^2/1000, mm^3/1000, and deg/1000 in the protocols.

For information on configuring the protocol using the Web interface, see *Ethernet Output* on page 230.

Concepts

To EtherNet/IP-enabled devices on the network, the sensor information is seen as a collection of objects, which have attributes that can be queried.

Gocator supports all required objects, such as the Identity object, TCP/IP object, and Ethernet Link object. In addition, assembly objects are used for sending sensor and sample data and receiving commands. There are three assembly objects: the command assembly (32 bytes), the sensor state assembly (100 bytes), and the sample state assembly object (380 bytes). The data attribute (0x03) of the assembly objects is a byte array containing information about the sensor. The data attribute can be accessed with the GetAttribute and SetAttribute commands.

The PLC sends a command to start a Gocator. The PLC then periodically queries the attributes of the assembly objects for its latest measurement results. In EtherNet/IP terminology, the PLC is a scanner and the Gocator is an adapter.

The Gocator supports unconnected or connected explicit messaging (with TCP). Implicit I/O messaging is supported as an advanced setting. For more information, see http://lmi3d.com/sites/default/files/APPNOTE_Implicit_Messaging_with_Allen-Bradley_PLCs.pdf.

The default EtherNet/IP ports are used. Port 44818 is used for TCP connections and UDP queries (e.g., list Identity requests). Port 2222 for UDP I/O Messaging is not supported.

Basic Object

Identity Object (Class 0x01)

Attribute	Name	Type	Value	Description	Access
1	Vendor ID	UINT	1256	ODVA-provided vendor ID	Get
2	Device Type	UINT	43	Device type	Get
3	Product Code	UINT	2000	Product code	Get
4	Revision	USINT USINT	x.x	Byte 0 - Major revision Byte 1 - Minor revision	Get
6	Serial number	UDINT	32-bit value	Sensor serial number	Get
7	Product Name	SHORT STRING 32	"Gocator"	Gocator product name	Get

TCP/IP Object (Class 0xF5)

The TCP/IP Object contains read-only network configuration attributes such as IP Address. TCP/IP configuration via Ethernet/IP is not supported. See Volume 2, Chapter 5-3 of the CIP Specification for a complete listing of TCP/IP object attributes.

Attribute	Name	Type	Value	Description	Access
1	Status	UDINT	0	TCP interface status	Get
2	Configuration Capability	UINT	0		Get
3	Configuration Control	UINT	0	Product code	Get
4	Physical Link Object	Structure (See description)		See 5.3.3.2.4 of CIP Specification Volume 2: Path size (UINT) Path (Padded EPATH)	Get
5	Interface Configuration	Structure (See description)		See 5.3.3.2.5 of CIP Specification Volume 2: IP address (UDINT) Network mask (UDINT) Gateway address (UDINT) Name server (UDINT) Secondary name (UDINT) Domain name (UDINT)	Get

Ethernet Link Object (Class 0xF6)

The Ethernet Link Object contains read-only attributes such as MAC Address (Attribute 3). See Volume 2, Chapter 5-4 of the CIP Specification for a complete listing of Ethernet Link object attributes.

Attribute	Name	Type	Value	Description	Access
1	Interface Speed	UDINT	1000	Ethernet interface data rate (mbps)	Get
2	Interface Flags	UDINT		See 5.4.3.2.1 of CIP Specification Volume 2: Bit 0: Link Status 0 – Inactive 1 - Active Bit 1: Duplex 0 – Half Duplex 1 – Full Duplex	Get
3	Physical Address	Array of 6 USINTs		MAC address (for example: 00 16 20 00 2E 42)	Get

Assembly Object (Class 0x04)

The Gocator Ethernet/IP object model includes the following assembly objects: Command, Sensor State, and Sample State.

All assembly object instances are static. Data in a data byte array in an assembly object are stored in the big endian format.

Command Assembly

The command assembly object is used to start, stop, and align the sensor, and also to switch jobs on the sensor.

Command Assembly

Information	Value
Class	0x4
Instance	0x310
Attribute Number	3
Length	32 bytes
Supported Service	0x10 (SetAttributeSingle)

Attributes 1 and 2 are not implemented, as they are not required for the static assembly object.

Attribute 3

Attribute	Name	Type	Value	Description	Access
3	Command	Byte Array	See Below	Command parameters Byte 0 - Command. See table below for specification of the values.	Get, Set

Command Definitions

Value	Name	Description
0	Stop running	Stop the sensor. No action if the sensor is already stopped

Value	Name	Description
1	Start Running	Start the sensor. No action if the sensor is already started.
2	Stationary Alignment	Start the stationary alignment process. Byte 1 of the sensor state assembly will be set to 1 (busy) until the alignment process is complete, then back to zero.
3	Moving Alignment	Start the moving alignment process. Byte 1 of the sensor state assembly will be set to 1 (busy) until the alignment process is complete, then back to zero.
4	Clear Alignment	Clear the alignment.
5	Load Job	Load the job. Set bytes 1-31 to the file name (one character per byte, including the extension).

Sensor State Assembly

The sensor state assembly object contains the sensor's states, such as the current sensor temperature, frame count, and encoder values.

Sensor State Assembly

Information	Value
Class	0x4
Instance	0x320
Attribute Number	3
Length	100 bytes
Supported Service	0x0E (GetAttributeSingle)

Attributes 1 and 2 are not implemented, as they are not required for the static assembly object.

Attribute 3

Attribute	Name	Type	Value	Description	Access
3	Command	Byte Array	See below	Sensor state information. See below for more details.	Get

Sensor State Information

Byte	Name	Type	Description
0	Sensor's state		Sensor state: 0 - Ready 1 - Running
1	Command in progress		Command busy status: 0 - Not busy 1 - Busy performing the last command Bytes 2 to 43 below are only valid when there is no command in progress.
2	Alignment state		Alignment status:

Byte	Name	Type	Description
			0 - Not aligned 1 - Aligned The value is only valid when byte1 is set to 0.
3-10	Encoder	64s	Current encoder position
11-18	Time	64s	Current timestamp
19	Current Job Filename Length	16u	Number of characters in the current job filename. (e.g., 11 for "current.job"). The length includes the .job extension. Valid when byte 1 = 0.
20-43	Current Job Filename		Name of currently loaded job file, including the ".job" extension. Each byte contains a single character. Valid when byte 1 = 0.
44 - 99	Reserved		Reserved bytes

Sample State Assembly

The sample state object contains measurements and their associated stamp information.

Sample State Assembly

Information	Value
Class	0x04
Instance	0x321
Attribute Number	3
Length	380 bytes
Supported Service	0x0E (GetAttributeSingle)

Attribute 3

Attribute	Name	Type	Value	Description	Access
3	Command	Byte Array		Sample state information. See below for more details	Get

Sample State Information

Byte	Name	Type	Description
0-1	Inputs		Digital input state.
2-9	Z Index Position	64s	Encoder position at time of last index pulse.
10-13	Exposure	32u	Laser exposure in µs.
14-17	Temperature	32u	Sensor temperature in degrees Celsius * 100 (centidegrees).
18-25	Position	64s	Encoder position.
26-33	Time	64u	Time.
34-41	Frame Counter	64u	Frame counter.

Byte	Name	Type	Description
42	Buffer Counter	8u	Number of buffered messages currently in the queue.
43	Buffer Overflow		Buffer Overflow Indicator: 0 - No overflow 1 - Overflow
44 - 79	Reserved		Reserved bytes.
80-83	Measurement 0	32s	Measurement value in µm (0x80000000 if invalid).
84	Decision 0	8u	Measurement decision. A bit mask, where: Bit 0: 1 - Pass 0 - Fail Bits 1-7: 0 - Measurement value OK 1 - Invalid value 2 - Invalid anchor
...	...		
375-378	Measurement 59	32s	Measurement value in µm (0x80000000 if invalid).
379	Decision 59	8u	Measurement decision. A bit mask, where: Bit 0: 1 - Pass 0 - Fail Bits 1-7: 0 - Measurement value OK 1 = Invalid value 2 = Invalid anchor

Measurement results are reported in pairs of values and decisions. Measurement values are 32 bits wide and decisions are 8 bits wide.

The measurement ID defines the byte position of each pair within the state information. The position of the first word can be calculated as (80 + 5 * ID). For example, a measurement with ID set to 4 can be read from byte 100 (high word) to 103 (low word) and the decision at 104.

In Profile mode, the measurement results are updated after each profile is processed. In Surface mode, the measurement results are updated after each discrete part has been processed. If buffering is enabled in the Ethernet Output panel, reading the Extended Sample State Assembly Object automatically advances the buffer. See See *Ethernet Output* on page 230 for information on the **Output** panel.

ASCII Protocol

This section describes the ASCII protocol. The ASCII protocol is available over either serial output or Ethernet output. Over serial output, communication is asynchronous (measurement results are automatically sent on the Data channel when the sensor is in the running state and results become available). Over Ethernet, communication can be asynchronous or use polling. For more information on polling commands, see

The protocol communicates using ASCII strings. The output result format from the sensor is user-configurable.

To use the ASCII protocol, it must be enabled and configured in the active job.

> The Gocator 4.x firmware uses mm, mm^2, mm^3, and degrees as standard units. In all protocols, values are scaled by 1000, as values in the protocols are represented as integers. This results in effective units of mm/1000, mm^2/1000, mm^3/1000, and deg/1000 in the protocols.

For information on configuring the protocol with the Web interface (when using the protocol over Ethernet), see *Ethernet Output* on page 230.

For information on configuring the protocol with the Web interface (when using the protocol over Serial), see *Serial Output* on page 238.

Connection Settings

Ethernet Communication

With Ethernet ASCII output, you can set the connection port numbers of the three channels used for communication (Control, Data, and Health):

Ethernet Ports for ASCII

Name	Description	Default Port
Control	To send commands to control the sensor.	8190
Data	To retrieve measurement output.	8190
Health	To retrieve specific health indicator values.	8190

Channels can share the same port or operate on individual ports. The following port numbers are reserved for Gocator internal use: 2016, 2017, 2018, and 2019. Each port can accept multiple connections, up to a total of 16 connections for all ports.

Serial Communication

Over serial, Gocator ASCII communication uses the following connection settings:

Serial Connection Settings for ASCII

Parameter	Value
Start Bits	1
Stop Bits	1
Parity	None
Data Bits	8
Baud Rate (b/s)	115200
Format	ASCII
Delimiter	CR

Up to 16 users can connect to the sensor for ASCII interfacing at a time. Any additional connections will remove the oldest connected user.

Polling Operation Commands (Ethernet Only)

On the Ethernet output, the Data channel can operate asynchronously or by polling.

Under asynchronous operation, measurement results are automatically sent on the Data channel when the sensor is in the running state and results become available. The result is sent on all connected data channels.

Under polling operation, a client can:

- Switch to a different job.
- Align, run, and trigger sensors.
- Receive sensor states, health indicators, stamps, and measurement results

Gocator sends Control, Data, and Health messages over separate channels. The Control channel is used for commands such as starting and stopping the sensor, loading jobs, and performing alignment (see *Control Commands* on the next page).

The Data channel is used to receive and poll for measurement results. When the sensor receives a Result command, it will send the latest measurement results on the same data channel that the request is received on. See *Data Commands* on page 393 for more information.

The Health channel is used to receive health indicators (see *Health Commands* on page 396).

Command and Reply Format

Commands are sent from the client to the Gocator. Command strings are not case sensitive. The command format is:

<COMMAND><DELIMITER><PARAMETER><TERMINATION>

If a command has more than one parameter, each parameter is separated by the delimiter. Similarly, the reply has the following format:

<STATUS><DELIMITER><OPTIONAL RESULTS><DELIMITER>

The status can either be "OK" or "ERROR". The optional results can be relevant data for the command if successful, or a text based error message if the operation failed. If there is more than one data item, each item is separated by the delimiter.

The delimiter and termination characters are configured in the Special Character settings.

Special Characters

The ASCII Protocol has three special characters.

Special Characters

Special Character	Explanation
Delimiter	Separates input arguments in commands and replies, or data items in results. Default value is ",".
Terminator	Terminates both commands and result output. Default value is "%r%n".
Invalid	Represents invalid measurement results. Default value is "INVALID"

The values of the special characters are defined in the Special Character settings. In addition to normal ASCII characters, the special characters can also contain the following format values.

Format values for Special Characters

Format Value	Explanation
%t	Tab
%n	New line
%r	Carriage return
%%	Percentage (%) symbol

Control Commands

Optional parameters are shown in italic. The placeholder for data is surrounded by brackets (<>). In the examples, the delimiter is set to ','.

Start

The Start command starts the sensor system (causes it to enter the Running state). This command is only valid when the system is in the Ready state. If a start target is specified, the sensor starts at the target time or encoder (depending on the trigger mode).

Formats

Message	Format
Command	Start,start target The start target (optional) is the time or encoder position at which the sensor will be started. The time and encoder target value should be set by adding a delay to the time or encoder position returned by the Stamp command. The delay should be set such that it covers the command response time of the Start command.
Reply	OK or ERROR, <Error Message>

Examples:

```
Command: Start
Reply: OK
Command: Start,1000000
Reply: OK
Command: Start
Reply: ERROR, Could not start the sensor
```

Stop

The stop command stops the sensor system (causes it to enter the Ready state). This command is valid when the system is in the Ready or Running state.

Formats

Message	Format
Command	Stop
Reply	OK or ERROR, <Error Message>

Examples:

```
Command: Stop
Reply: OK
```

Trigger

The Trigger command triggers a single frame capture. This command is only valid if the sensor is configured in the Software trigger mode and the sensor is in the Running state. If a start target is specified, the sensor starts at the target time or encoder (depending on the unit setting in the Trigger panel; see on page 83).

Formats

Message	Format
Command	Trigger,start target The start target (optional) is the time or encoder position at which the sensor will be started. The time and encoder target value should be set by adding a delay to the time or encoder position returned by the Stamp command. The delay should be set such that it covers the command response time of the Start command.
Reply	OK or ERROR, <Error Message>

Examples:

```
Command: Trigger
Reply: OK
Command: Trigger,1000000
Reply: OK
```

LoadJob

The Load Job command switches the active sensor configuration.

Formats

Message	Format
Command	LoadJob,job file name If the job file name is not specified, the command returns the current job name. An error message is generated if no job is loaded. ".job" is appended if the filename does not have an extension.
Reply	OK or ERROR, <Error Message>

Examples:

```
Command: LoadJob,test.job
Reply: OK,test.job loaded successfully
Command: LoadJob
Reply: OK,test.job
Command: LoadJob,wrongname.job
Reply: ERROR, failed to load wrongname.job
```

Stamp

The Stamp command retrieves the current time, encoder, and/or the last frame count.

Formats

Message	Format
Command	Stamp,time,encoder,frame If no parameters are given, time, encoder, and frame will be returned. There could be more than one selection.
Reply	If no arguments are specified: OK, time, <time value>, encoder, <encoder position>, frame, <frame count> ERROR, <Error Message> If arguments are specified, only the selected stamps will be returned.

Examples:

```
Command: Stamp
Reply: OK,Time,9226989840,Encoder,0,Frame,6
Command: Stamp,frame
Reply: OK,6
```

Stationary Alignment

The Stationary Alignment command performs an alignment based on the settings in the sensor's live job file. A reply to the command is sent when the alignment has completed or failed. The command is timed out if there has been no progress after one minute.

Formats

Message	Format
Command	StationaryAlignment

Message	Format
Reply	If no arguments are specified
	OK or ERROR, <Error Message>

Examples:

```
Command: StationaryAlignment
Reply: OK
Command: StationaryAlignment
Reply: ERROR,ALIGNMENT FAILED
```

Moving Alignment

The Moving Alignment command performs an alignment based on the settings in the sensor's live job file. A reply to the command is sent when the alignment has completed or failed. The command is timed out if there has been no progress after one minute.

Formats

Message	Format
Command	MovingAlignment
Reply	If no arguments are specified
	OK or ERROR, <Error Message>

Examples:

```
Command: MovingAlignment
Reply: OK
Command: MovingAlignment
Reply: ERROR, ALIGNMENT FAILED
```

Clear Alignment

The Clear Alignment command clears the alignment record generated by the alignment process.

Formats

Message	Format
Command	ClearAlignment
Reply	OK or ERROR, <Error Message>

Examples:

```
Command: ClearAlignment
Reply: OK
```

Data Commands

Optional parameters are shown in italic. The placeholder for data is surrounded by brackets (<>). In the examples, the delimiter is set to ','.

Result

The Result command retrieves measurement values and decisions.

Formats

Message	Format
Command	Result,measurement ID,measurement ID...
Reply	If no arguments are specified, the custom format data string is used. OK, <custom data string> ERROR, <Error Message> If arguments are specified, OK, <data string in standard format> ERROR, <Error Message>

Examples:

Standard data string for measurements ID 0 and 1:

```
Result,0,1
```

```
OK,M00,00,V151290,D0,M01,01,V18520,D0
```

Standard formatted measurement data with a non-existent measurement of ID 2:

```
Result,2
```

```
ERROR,Specified measurement ID not found. Please verify your input
```

Custom formatted data string (%time, %value[0], %decision[0]):

```
Result
```

```
OK,1420266101,151290,0
```

Value

The Value command retrieves measurement values.

Formats

Message	Format
Command	Value,measurement ID,measurement ID...
Reply	If no arguments are specified, the custom format data string is used. OK, <custom data string> ERROR, <Error Message> If arguments are specified, OK, <data string in standard format, except that the decisions are not sent> ERROR, <Error Message>

Examples:

Standard data string for measurements ID 0 and 1:

```
Value,0,1
```

```
OK,M00,00,V151290,M01,01,V18520
```

Standard formatted measurement data with a non-existent measurement of ID 2:

```
Value,2
```

```
ERROR,Specified measurement ID not found. Please verify your input
```

Custom formatted data string (%time, %value[0]):

```
Value
```

```
OK, 1420266101, 151290
```

Decision

The Decision command retrieves measurement decisions.

Formats

Message	Format
Command	Decision,measurement ID,measurement ID...
Reply	If no arguments are specified, the custom format data string is used. OK, <custom data string> ERROR, <Error Message> If arguments are specified, OK, <data string in standard format, except that the values are not sent> ERROR, <Error Message>

Examples:

Standard data string for measurements ID 0 and 1:

```
Decision,0,1
```

```
OK,M00,00,D0,M01,01,D0
```

Standard formatted measurement data with a non-existent measurement of ID 2:

```
Decision,2
```

```
ERROR,Specified measurement ID not found. Please verify your input
```

Custom formatted data string (%time, %decision[0]):

```
Decision
```

```
OK,1420266101, 0
```

Health Commands

Optional parameters are shown in italic. The placeholder for data is surrounded by brackets (<>). In the examples, the delimiter is set to ','.

Health

The Health command retrieves health indicators. See *Health Results* on page 371 for details on health indicators.

Formats

Message	Format
Command	Health,health indicator ID.Optional health indicator instance ... More than one health indicator can be specified. Note that the health indicator instance is optionally attached to the indicator ID with a '.'. If the health indicator instance field is used the delimiter cannot be set to '.'.
Reply	OK, <health indicator of first ID>, <health indicator of second ID> ERROR, <Error Message>

Examples:

```
health,2002,2017

OK,46,1674

Health

ERROR,Insufficient parameters.
```

Standard Result Format

Gocator can send measurement results either in the standard format or in a custom format. In the standard format, you select in the web interface which measurement values and decisions to send. For each measurement the following message is transmitted:

M	t_n	,	i_n	,	V	v_n	,	D	d_1	CR

Field	Shorthand	Length	Description
MeasurementStart	M	1	Start of measurement frame.
Type	t_n	n	Hexadecimal value that identifies the type of measurement. The measurement type is the same as defined elsewhere (see on page 362).
Id	i_n	n	Decimal value that represents the unique identifier of the measurement.
ValueStart	V	1	Start of measurement value.
Value	v_n	n	Measurement value, in decimal. The unit of the value is measurement-specific.

Field	Shorthand	Length	Description
DecisionStart	D	1	Start of measurement decision.
Decision	d_1	1	Measurement decision, a bit mask where: Bit 0: 1 – Pass 0 – Fail Bits 1-7: 0 – Measurement value OK 1 – Invalid value 2 - Invalid anchor

Custom Result Format

In the custom format, you enter a format string with place holders to create a custom message. The default format string is "%time, %value[0], %decision[0]".

Result Placeholders

Format Value	Explanation
%time	Timestamp
%encoder	Encoder position
%frame	Frame number
%value[Measurement ID]	Measurement value of the specified measurement ID. The ID must correspond to an existing measurement. The value output will be displayed as an integer in micrometers.
%decision[Measurement ID]	Measurement decision, where the selected measurement ID must correspond to an existing measurement. Measurement decision is a bit mask where: Bit 0: 1 – Pass 0 – Fail Bits 1-7: 0 – Measurement value OK 1 – Invalid value 2 - Invalid anchor

Selcom Protocol

This section describes the Selcom serial protocol settings and message formats supported by Gocator sensors.

To use the Selcom protocol, it must be enabled and configured in the active job.

For information on configuring the protocol using the Web interface, see *Serial Output* on page 238.

Units for data scales use the standard units (mm, mm^2, mm^3, and degrees).

Serial Communication

Data communication is synchronous using two unidirectional (output only) RS-485 serial channels: data (Serial_Out0) and clock (Serial_Out1). See *Serial Output* on page 468 for cable pinout information.

Measurement results are sent on the serial output (data) in asynchronous mode. Measurement values and decisions can be transmitted to an RS-485 receiver, but job handling and control operations must be performed through the Gocator's web interface or through communications on the Ethernet output.

Connection Settings

The Selcom protocol uses the following connection settings:

Serial Connection Settings


Parameter	Value
Data Bits	16
Baud Rate (b/s)	96000, 512000, 1024000
Format	Binary

Message Format


The data channel is valid on the rising edge of the clock and data is output with the most significant bit first, followed by control bits for a total of 16 bits of information per frame. The time between the start of the camera exposure and the delivery of the corresponding range data is fixed to a deterministic value.

The sensor can output data using one of four formats, illustrated below, where:


- MSB = most significant bit
- LSB = least significant bit
- C = data valid bit (high = invalid)
- S = whether data is acquired in search mode or track mode (high = search mode)

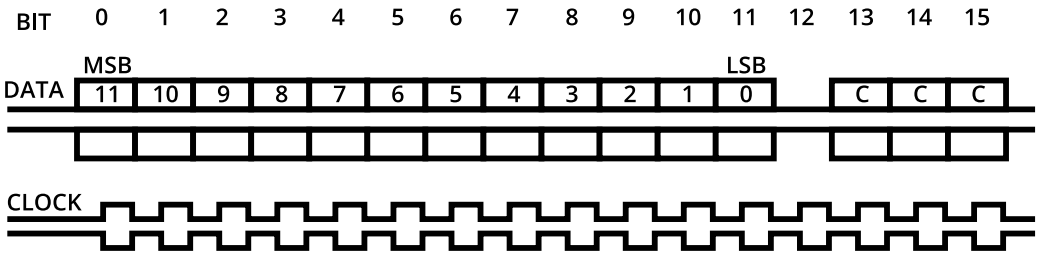


12-bit data format (SLS mode; "SLS" in Gocator web interface)

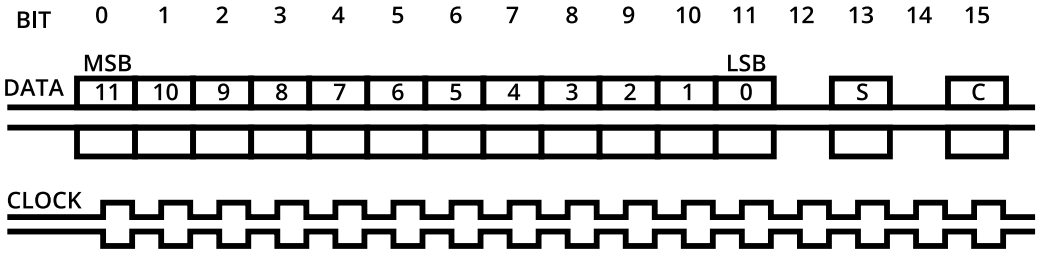

12-bit data format with Search/Track bit

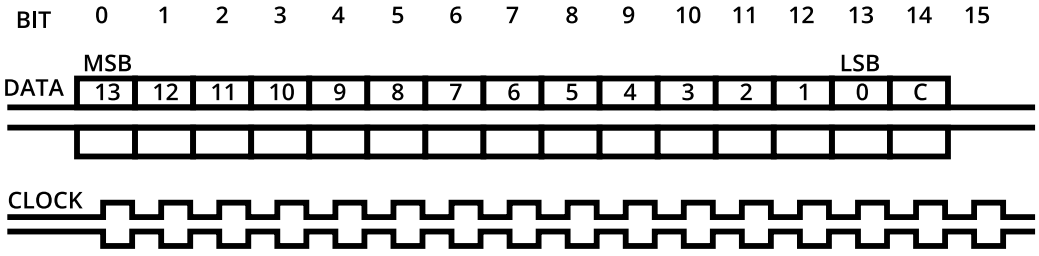

14-bit data format

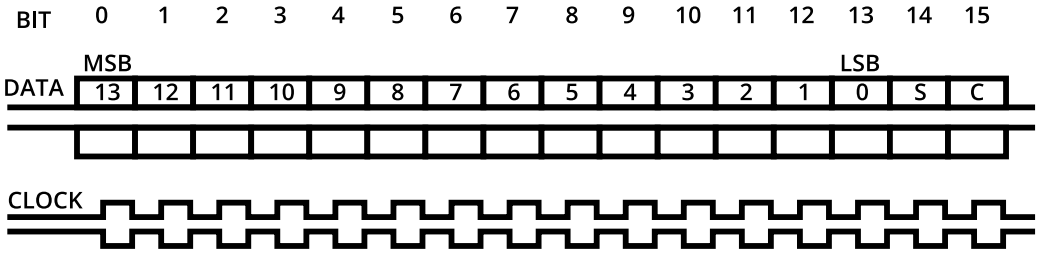

14-bit data format with Search/Track bit

Software Development Kit

The Gocator Software Development Kit (SDK) includes open-source software libraries and documentation that can be used to programmatically access and control Gocator sensors. The latest version of the SDK can be downloaded by going to http://lmi3d.com/support/downloads/, selecting a Gocator series, and clicking on the *Product User Area* link.

You can download the Gocator SDK from within the Web interface.



To download the SDK:

1. Go to the **Manage** page and click on the **Support** category
2. Next to **Software Development Kit (SDK)**, click **Download**
3. Choose the location for the SDK on the client computer.

Applications compiled with previous versions of the SDK are compatible with Gocator firmware if the major version numbers of the protocols match. For example, an application compiled with version 4.0 of the SDK (which uses protocol version 4.0) will be compatible with a Gocator running firmware version 4.1 (which uses protocol version 4.1). However, any new features in firmware version 4.1 would not be available.

If the major version number of the protocol is different, for example, an application compiled using SDK version 3.x being used with a Gocator running firmware 4.x, you must rewrite the application with the SDK version corresponding to the sensor firmware in use.

The Gocator API, included in the SDK, is a C language library that provides support for the commands and data formats used with Gocator sensors. The API is written in standard C to allow the code to be compiled for any operating system. A pre-built DLL is provided to support 32-bit and 64-bit Windows operating systems. Projects and makefiles are included to support other editions of Windows and Linux.

For Windows users, code examples explaining how to wrap the calls in C# and VB.NET are provided in the tools package, which can be downloaded at http://lmi3d.com/support/downloads/.

For more information about programming with the Gocator SDK, refer to the class reference and sample programs included in the Gocator SDK.

Setup and Locations

Class Reference

The full SDK class reference is found by accessing 14400-4.x.x.xx_SOFTWARE_GO_SDK\GO_SDK\doc\GoSdk\Gocator_2x00\GoSdk.html.

Examples

Examples showing how to perform various operations are provided, each one targeting a specific area. All of the examples can be found in *GoSdkSamples.sln*.

To run the SDK samples, make sure *GoSdk.dll* and *kApi.dll* (or *GoSdkd.dll* and *kApid.dll* in debug configuration) are copied to the executable directory. All sample code, including C examples, is now located in the *Tools* package, which can be downloaded by going to http://lmi3d.com/support/downloads/.

Sample Project Environment Variable


All sample projects use the environment variable *GO_SDK_4*. The environment variable should point to the *GO_SDK* directory, for example, *C:\14400-4.0.9.156_SOFTWARE_GO_SDK\GO_SDK*.

Header Files

Header files are referenced with GoSdk as the source directory, for example: #include <GoSdk/GoSdk.h>. The SDK header files also reference files from the *kApi* directory. The include path must be set up for both the GoSdk and the kApi directories. For example, the sample projects set the include path to $(GO_SDK_4)\Gocator\GoSdk and $(GO_SDK_4)\Platform\kApi.

Class Hierarchy

This section describes the class hierarchy of the Gocator 4.x SDK.

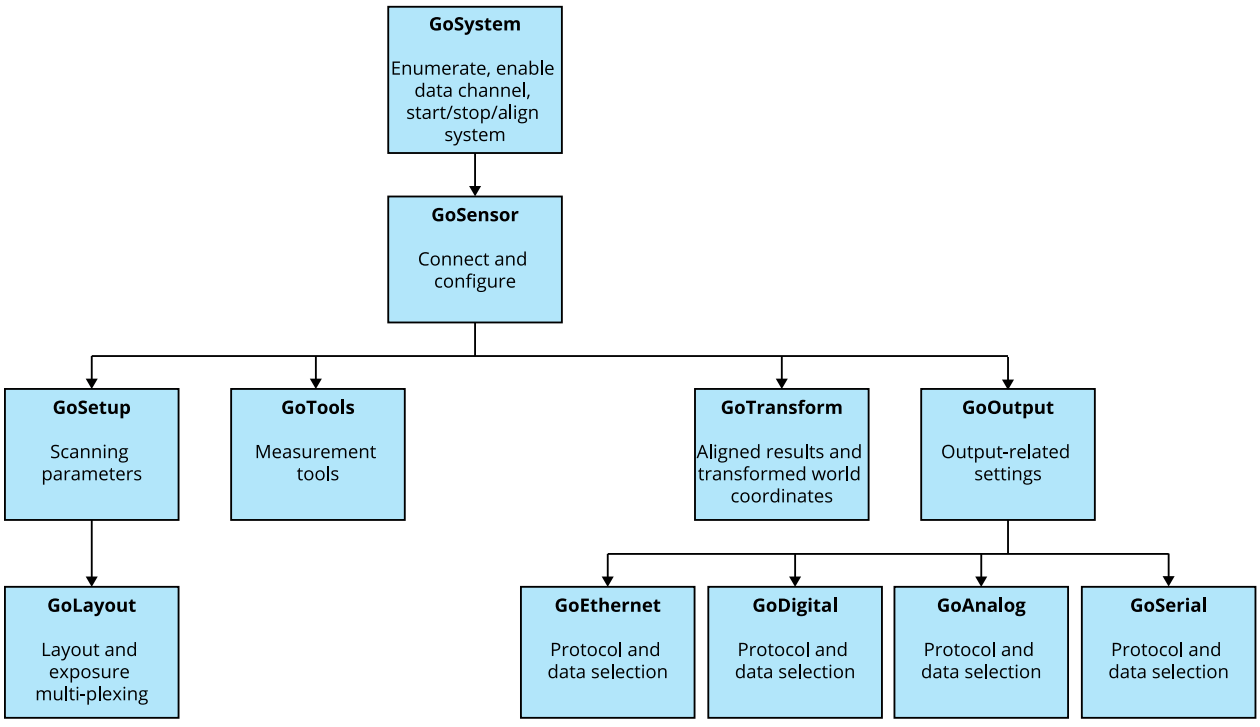

GoSystem

The *GoSystem* class is the top-level class in Gocator 4.x. Multiple sensors can be enabled and connected in one *GoSystem*. Only one *GoSystem* object is required for multi-sensor control.

Refer to the *How To Use The Open Source SDK To Fully Control A Gocator Multi-sensor System* how-to guide in http://lmi3d.com/sites/default/files/APPNOTE_Gocator_4.x_Multi_Sensor_Guide.zip for details on how to control and operate a multi-sensor system using the SDK.

> All objects that are explicitly created by the user or passed via callbacks should be destroyed by using the *GoDestroy* function.

GoSensor

GoSensor represents a physical sensor. If the physical sensor is the Main sensor in a dual-sensor setup, it can be used to configure settings that are common to both sensors.

GoSetup

The *GoSetup* class represents a device's configuration. The class provides functions to get or set all of the settings available in the Gocator web interface.

GoSetup is included inside *GoSensor*. It encapsulates scanning parameters, such as exposure, resolution, spacing interval, etc. For parameters that are independently controlled for Main and Buddy sensors, functions accept a role parameter.

GoLayout

The *GoLayout* class represents layout-related sensor configuration.

GoTools

The *GoTools* class is the base class of the measurement tools. The class provides functions for getting and setting names, retrieving measurement counts, etc.

GoTransform

The *GoTransform* class represents a sensor transformation and provides functions to get and set transformation information, as well as encoder-related information.

GoOutput

The *GoOutput* class represents output configuration and provides functions to get the specific types of output (Analog, Digital, Ethernet, and Serial). Classes corresponding to the specific types of output (*GoAnalog*, *GoDigital*, *GoEthernet*, and *GoSerial*) are available to configure these outputs.

Data Types

The following sections describe the types used by the SDK and the kApi library.

Value Types

GoSDK is built on a set of basic data structures, utilities, and functions, which are contained in the *kApi* library.

The following basic value types are used by the *kApi* library.

Value Data Types

Type	Description
k8u	8-bit unsigned integer
k16u	16-bit unsigned integer
k16s	16-bit signed integer
k32u	32-bit unsigned integer
k32s	32-bit signed integer
k64s	64-bit signed integer
k64u	64-bit unsigned integer
k64f	64-bit floating number
kBool	Boolean, value can be kTRUE or kFALSE
kStatus	Status, value can be kOK or kERROR
kIpAddress	IP address

Output Types

The following output types are available in the SDK.

Output Data Types

Data Type	Description
GoAlignMsg	Represents a message containing an alignment result.
GoBoundingBoxMatchMsg	Represents a message containing bounding box based part matching results.
GoDataMsg	Represents a base message sourced from the data channel. See *GoDataSet Type* on the next page for more information.
GoEdgeMatchMsg	Represents a message containing edge based part matching results.
GoEllipseMatchMsg	Represents a message containing ellipse based part matching results.
GoExposureCalMsg	Represents a message containing exposure calibration results.
GoMeasurementMsg	Represents a message containing a set of GoMeasurementData objects.
GoProfileIntensityMsg	Represents a data message containing a set of profile intensity arrays.
GoProfileMsg	Represents a data message containing a set of profile arrays.
GoRangeIntensityMsg	Represents a data message containing a set of range intensity data.
GoRangeMsg	Represents a data message containing a set of range data.
GoResampledProfileMsg	Represents a data message containing a set of resampled profile arrays.
GoSectionMsg	Represents a data message containing a set of section arrays.

Data Type	Description
GoSectionIntensityMsg	Represents a data message containing a set of profile intensity arrays.
GoStampMsg	Represents a message containing a set of acquisition stamps.
GoSurfaceIntensityMsg	Represents a data message containing a surface intensity array.
GoSurfaceMsg	Represents a data message containing a surface array.
GoVideoMsg	Represents a data message containing a video image.


Refer to the *GoSdkSamples* sample code for examples of acquiring data using these data types.

See *Setup and Locations* on page 400 for more information on the code samples.

GoDataSet Type

Data are passed to the data handler in a *GoDataSet* object. The *GoDataSet* object is a container that can contain any type of data, including scan data (profiles, sections, or surfaces), measurements, and results from various operations. Data inside the *GoDataSet* object are represented as messages.

The following illustrates the content of a *GoDataSet* object of a profile mode setup with two measurements. The content when using a surface mode setup is identical, except that a *GoSurfaceMsg* is sent instead of a *GoProfileMsg*.

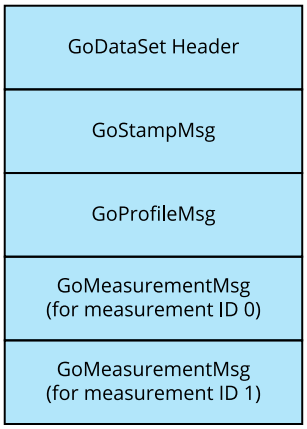

After receiving the *GoDataSet* object, you should call *GoDestroy* to dispose the *GoDataSet* object. You do not need to dispose objects within the *GoDataSet* object individually.

All objects that are explicitly created by the user or passed via callbacks should be destroyed by using the *GoDestroy* function.

Measurement Values and Decisions

Measurement values and decisions are 32-bit signed values (k32s). See *Value Types* on the previous page for more information on value types.

The following table lists the decisions that can be returned.

Measurement Decisions


Decision	Description
1	The measurement value is between the maximum and minimum decision values. This is a pass decision.
0	The measurement value is outside the maximum and minimum. This is a fail decision.
-1	The measurement is invalid (for example, the target is not within range). Provides the reason for the failure.
-2	The tool containing the measurement is anchored and has received invalid measurement data from one of its anchors. Provides the reason for the failure.

Refer to the *SetupMeasurement* example for details on how to add and configure tools and measurements. Refer to the *ReceiveMeasurement* example for details on how to receive measurement decisions and values.

> You should check a decision against <=0 for failure or invalid measurement.

Operation Workflow

Applications created using the SDK typically use the following programming sequence:

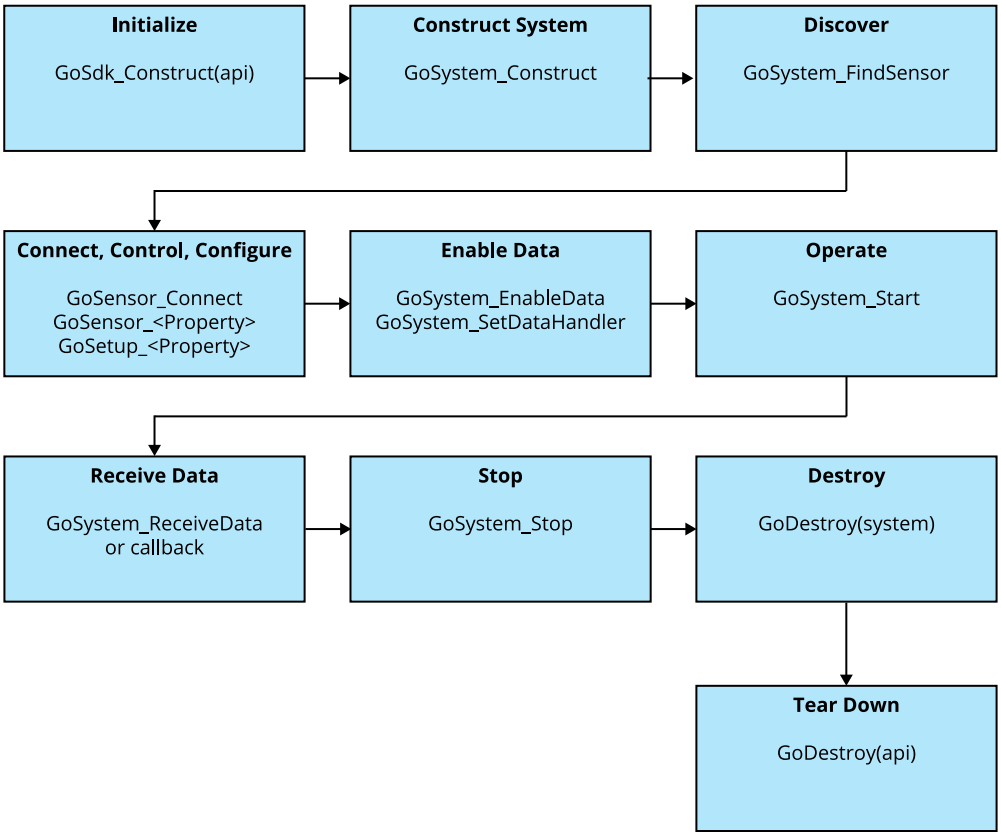

> See *Setup and Locations* on page 400 for more information on the code samples referenced below.

> Sensors must be connected before the system can enable the data channel.

All data functions are named *Go<Object>_<Function>*, for example, *GoSensor_Connect*. For property access functions, the convention is *Go<Object>_<Property Name>* for reading the property and *Go<Object>_Set<Property Name>* for writing it, for example, *GoMeasurement_DecisionMax* and *GoMeasurement_SetDecisionMax*, respectively.

Initialize GoSdk API Object

Before the SDK can be used, the *GoSdk* API object must be initialized by calling *GoSdk_Construct(api)*:

```
kAssembly api = kNULL;
if ((status = GoSdk_Construct(&api)) != kOK)
{
    printf("Error: GoSdk_Construct:%d\n", status);
    return;
}
```

When the program finishes, call *GoDestroy(api)* to destroy the API object.

Discover Sensors

Sensors are discovered when *GoSystem* is created, using *GoSystem_Construct*. You can use *GoSystem_SensorCount* and *GoSystem_SensorAt* to iterate all the sensors that are on the network.

GoSystem_SensorCount returns the number of sensors physically in the network.

Alternatively, use *GoSystem_FindSensorById* or *GoSystem_FindSensorByIpAddress* to get the sensor by ID or by IP address.

Refer to the *Discover* example for details on iterating through all sensors. Refer to other examples for details on how to get a sensor handle directly from IP address.

Connect Sensors

Sensors are connected by calling *GoSensor_Connect*. You must first get the sensor object by using *GoSystem_SensorAt*, *GoSystem_FindSensorById*, or *GoSystem_FindSensorByIpAddress*.

Configure Sensors

Some configuration is performed using the *GoSensor* object, such as managing jobs, uploading and downloading files, scheduling outputs, setting alignment reference, etc. Most configuration is however performed through the *GoSetup* object, for example, setting scan mode, exposure, exposure mode, active area, speed, alignment, filtering, subsampling, etc. Surface generation is configured through the *GoSurfaceGeneration* object and part detection settings are configured through the *GoPartDetection* object.

See *Class Hierarchy* on page 401 for information on the different objects used for configuring a sensor. Sensors must be connected before they can be configured.

Refer to the *Configure* example for details on how to change settings and to switch, save, or load jobs. Refer to the *BackupRestore* example for details on how to back up and restore settings.

Enable Data Channels

Use *GoSystem_EnableData* to enable the data channels of all connected sensors. Similarly, use *GoSystem_EnableHealth* to enable the health channels of all connected sensors.

Perform Operations

Operations are started by calling *GoSystem_Start*, *GoSystem_StartAlignment*, and *GoSystem_StartExposureAutoSet*.

Refer to the *StationaryAlignment* and *MovingAlignment* examples for details on how to perform alignment operations. Refer to the *ReceiveRange*, *ReceiveProfile*, and *ReceiveWholePart* examples for details on how to acquire data.

Example: Configuring and starting a sensor with the Gocator API

```
#include <GoSdk/GoSdk.h>

void main()
{
    kIpAddress ipAddress;
    GoSystem system = kNULL;
    GoSensor sensor = kNULL;
    GoSetup setup = kNULL;

    //Construct the GoSdk library.
    GoSdk_Construct(&api);
    //Construct a Gocator system object.
    GoSystem_Construct(&system, kNULL);
    //Parse IP address into address data structure
    kIpAddress_Parse(&ipAddress, SENSOR_IP);
    //Obtain GoSensor object by sensor IP address
    GoSystem_FindSensorByIpAddress(system, &ipAddress, &sensor)
    //Connect sensor object and enable control channel
    GoSensor_Connect(sensor);
    //Enable data channel
    GoSensor_EnableData(system, kTRUE)
    //[Optional] Setup callback function to receive data asynchronously
    //GoSystem_SetDataHandler(system, onData, &contextPointer)
    //Retrieve setup handle
    setup = GoSensor_Setup(sensor);
    //Reconfigure system to use time-based triggering.
    GoSetup_SetTriggerSource(setup, GO_TRIGGER_TIME);
    //Send the system a "Start" command.
    GoSystem_Start(system);


    //Data will now be streaming into the application
```

```
    //Data can be received and processed asynchronously if a callback function has been
    //set (recommended)
    //Data can also be received and processed synchronously with the blocking call
    //GoSystem_ReceiveData(system, &dataset, RECEIVE_TIMEOUT)
    //Send the system a "Stop" command.
    GoSystem_Stop(system);


    //Free the system object.
    GoDestroy(system);

    //Free the GoSdk library
    GoDestroy(api);
}
```

Limiting Flash Memory Write Operations

Several operations and Gocator SDK functions write to the Gocator's flash memory. The lifetime of the flash memory is limited by the number of write cycles. Therefore it is important to avoid frequent write operation to the Gocator's flash memory when you design your system with the Gocator SDK.

Power loss during flash memory write operation will also cause Gocators to enter rescue mode.

This topic applies to all Gocator sensors.

Gocator SDK Write-Operation Functions

Name	Description
GoSensor_Restore	Restores a backup of sensor files.
GoSensor_RestoreDefaults	Restores factory default settings.
GoSensor_CopyFile	Copies a file within the connected sensor. The flash write operation does not occur if GoSensor_CopyFile function is used to load an existing job file. This is accomplished by specifying "_live" as the destination file name.
GoSensor_DeleteFile	Deletes a file in the connected sensor.
GoSensor_SetDefaultJob	Sets a default job file to be loaded on boot.
GoSensor_UploadFile	Uploads a file to the connected sensor.
GoSensor_Upgrade	Upgrades sensor firmware.
GoSystem_StartAlignment	When alignment is performed with alignment reference set to fixed, flash memory is written immediately after alignment. GoSensor_ SetAlignmentReference() is used to configure alignment reference.
GoSensor_SetAddress	Configures a sensor's network address settings.
GoSensor_ChangePassword	Changes the password associated with the specified user account.

System created using the SDK should be designed in a way that parameters are set up to be appropriate for various application scenarios. Parameter changes not listed above will not invoke flash memory write operations when the changes are not saved to a file using the GoSensor_CopyFile function. Fixed alignment should be used as a means to attach previously conducted alignment results to a job file, eliminating the need to perform a new alignment.


Tools and Native Drivers

The following sections describe the tools and native drivers you can use with a Gocator.

Sensor Recovery Tool

If a sensor's network address or administrator password is forgotten, the sensor can be discovered on the network and/or restored to factory defaults by using a special software tool called the Sensor Discovery tool. This software tool can be obtained from the downloads area of the LMI Technologies website: http://www.lmi3D.com.

After downloading the tool package [14405-x.x.x.x_SOFTWARE_GO_Tools.zip], unzip the file and run the Sensor Discovery Tool [bin>win32>kDiscovery.exe].

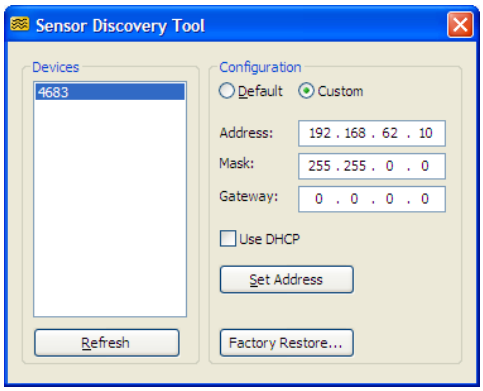

Any sensors that are discovered on the network will be displayed in the Devices list.

To change the network address of a sensor:

1. To change the network address of a sensor.
2. Select the **Custom** option.
3. Enter the new network address information.
4. Press the Set Address button.

To restore a sensor to factory defaults:

1. Select the sensor serial number in the **Devices** list.
2. Press the **Factory Restore...** button.
   Confirm when prompted.

The Sensor Discovery tool uses UDP broadcast messages to reach sensors on different subnets. This enables the Sensor Discovery tool to locate and re-configure sensors even when the sensor IP address or subnet configuration is unknown.

GenTL Driver

GenTL is an industry standard method of controlling and acquiring data from an imaging device. The GenTL driver included with Gocator allows GenTL-compliant third-party software applications such as Halcon and Common Vision Blox to acquire and process 3D point clouds and intensity generated from the Gocator's Video, Profile (with **Uniform Spacing** disabled) and Surface modes in real-time.


> To use these third-party software applications, you *must* configure a system variable so the software can access the GenTL driver. For instructions, see *To configure system variables to use the driver in Windows 7*, below.

You can download the toolset package containing the driver from the LMI Technologies website at http://lmi3d.com/support/downloads/. Click the link for your product, click the *Product User Area* link at the top of the page, and log in. The tool package is called 14405-x.x.x.x_SOFTWARE_GO_Tools.zip.


After downloading the package and unzipping the file to a location you will remember, you will find the driver in the GenTL\x86 or GenTL\x64 folder (you can move the GenTL folder to a more convenient location).

To configure system variables to use the driver in Windows 7:


1. From the Start menu, open the **Control** panel and then click **System and Security**.

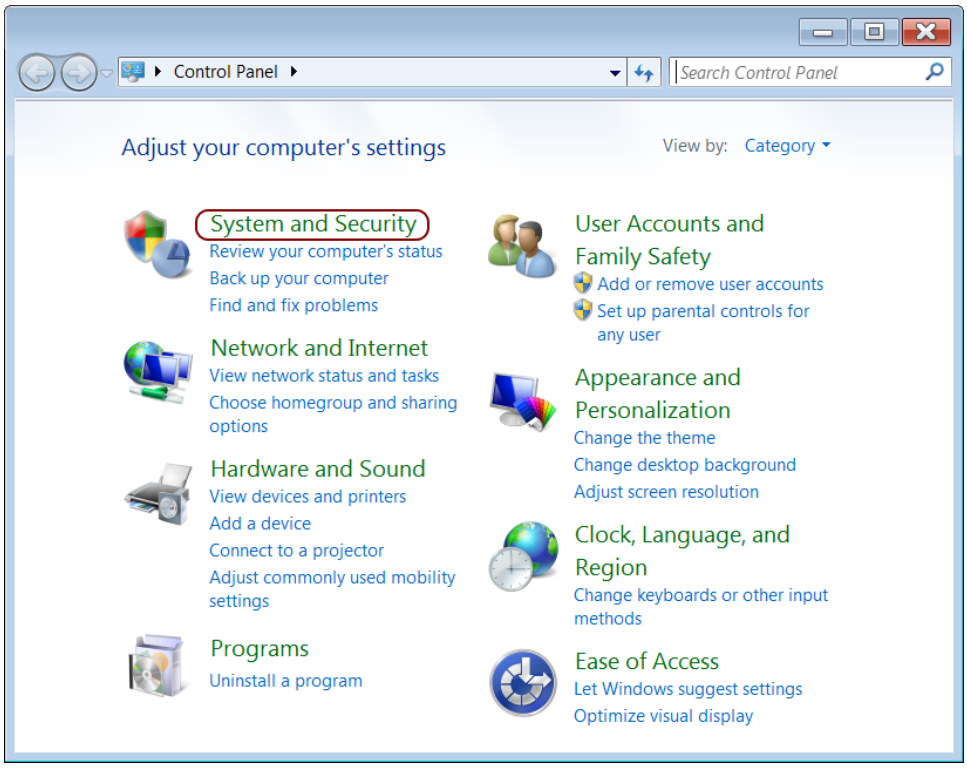


2. Click **System**.

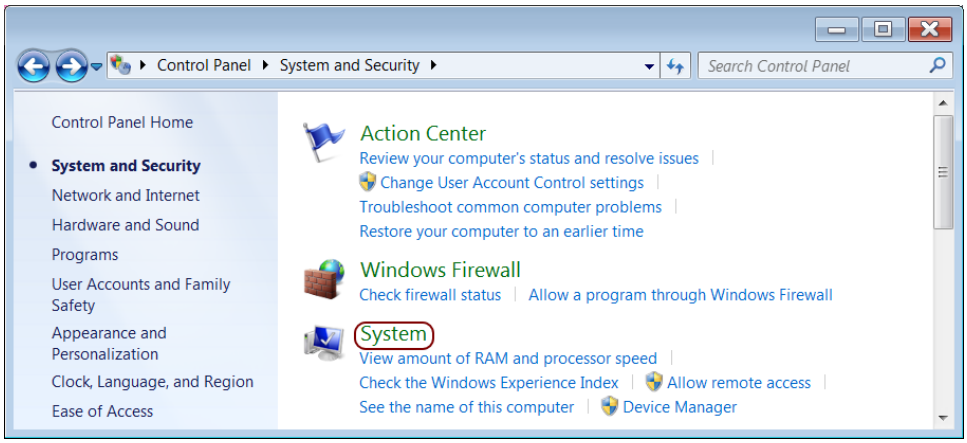


3. Click **Advanced System Settings**.

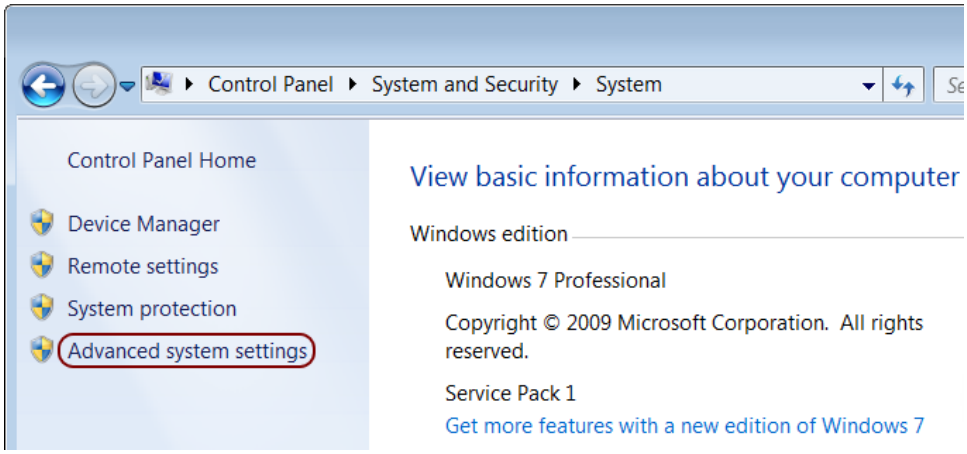

4. In the **System Properties** dialog, on the **Advanced** tab, click **Environment Variables...**

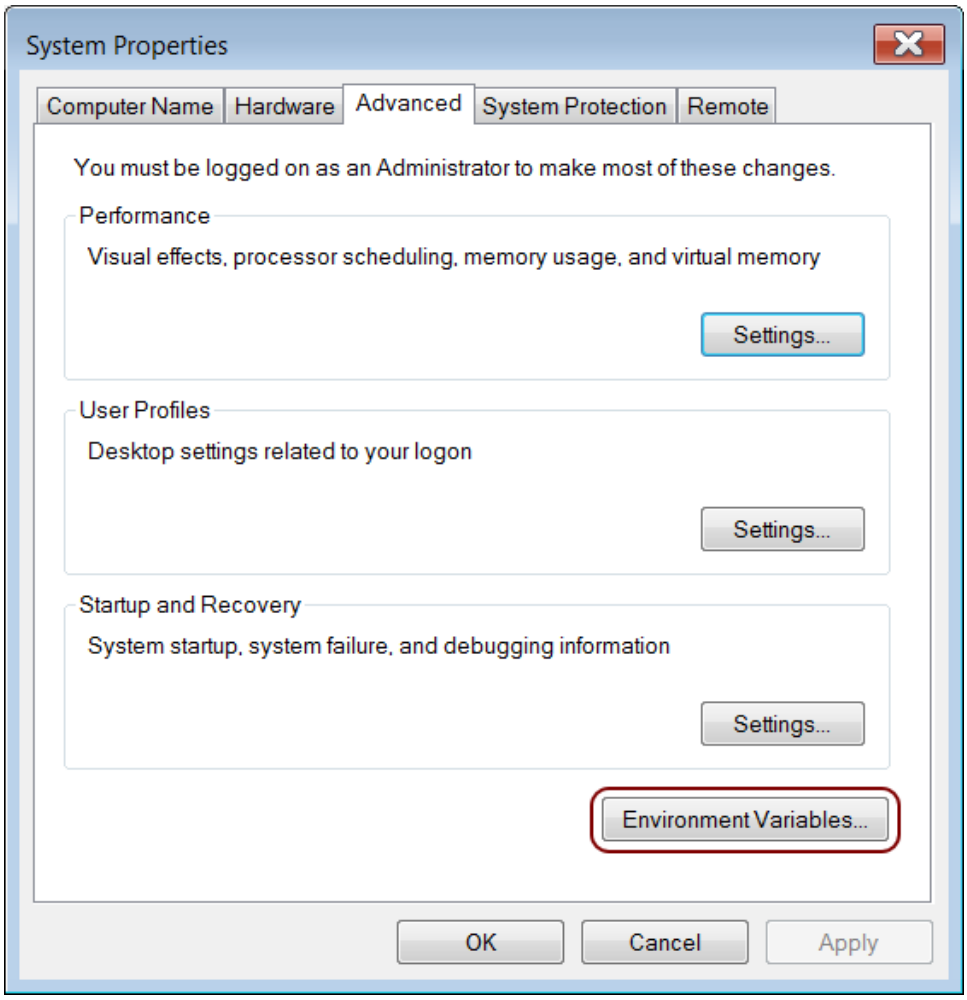


5. In the **Environment Variables** dialog, under the **System variables** list, click **New**.

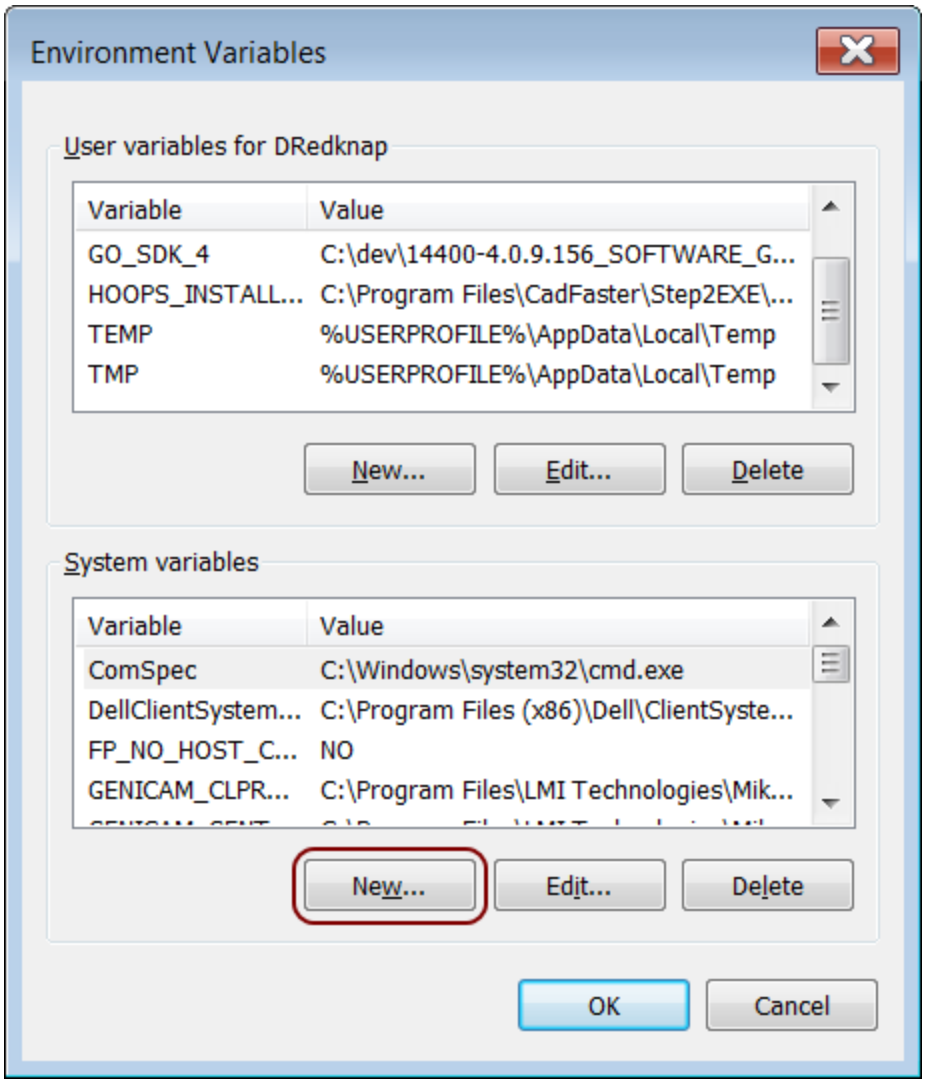

6. In the **New System Variable** dialog, enter the following information, depending on your system:

	Variable name	**Variable value**
32-bit system	GENICAM_GENTL32_PATH	The full path to the GenTL\x86 folder.
64-bit system	GENICAM_GENTL64_PATH	The full path to the GenTL\x64 folder.

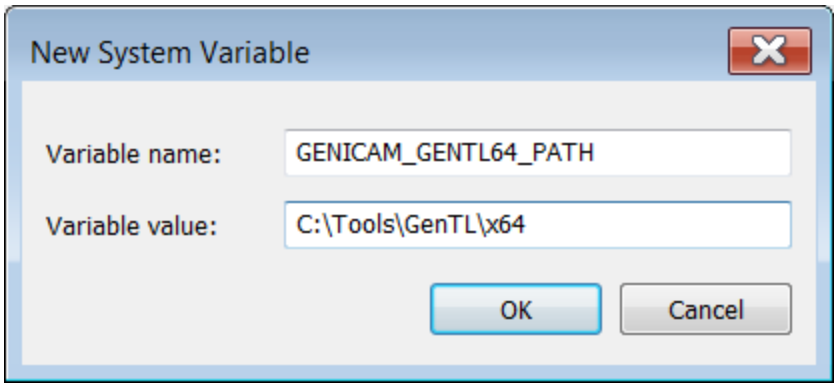

7. Click OK in the dialogs until they are all closed.

To work with the Gocator GenTL driver, the Gocator must operate in Surface or Video mode with its the appropriate output enabled in the **Ethernet** panel in the **Output** page. Check **Acquire Intensity** in the **Scan Mode** panel on the **Scan** page and enable intensity output in the **Ethernet** panel if intensity data is required.

The GenTL driver packs the part output, intensity, and stamps (e.g., time stamp, encoder index, etc.) into either a 16-bit RGB image or a 16-bit grey scale image. You can select the format in the Go2GenTL.xml setting file.

The width and height of the 16-bit RGB or grey scale image is calculated from the maximum number of columns and rows needed to accommodate the sensor's field of view and the maximum part length.

16-bit RGB Image

When the 16-bit RGB format is used, the height map, intensity, and stamps are stored in the red, green, and blue channel respectively.

Channel	Details
Red	Height map information. The width and height of the image represent the dimensions in the X and Y axis. Together with the pixel value, each red pixel presents a 3D point in the real-world coordinates. The following formula can be used to calculate the real-world coordinates (X, Y, Z) from pixel coordinates (Px, Py, Pz): X = X offset + Px * X resolution Y = Y offset + Py * Y resolution Z = Z offset + Pz * Z resolution Refer to the blue channel on how to retrieve the offset and resolution values. If Pz is 0 if the data is invalid. The Z offset is fixed to -32768 * Z resolution. Z is zero if Pz is 32768.
Green	Intensity information. Same as the red channel, the width and height of the image represent the dimension in the X and the Y axis. Together with the pixel value, each blue pixel represents an intensity value in the real-world coordinates. The following formula can be used to calculate the real-world coordinates (X, Y, Z) from pixel coordinates (Px, Py, Pz): X = X offset + Px * X resolution Y = Y offset + Py * Y resolution Z = 16-bit intensity value The intensity value is 0 if the intensity image is not available. Gocator outputs 8-bit intensity values. The values stored in the 16-bit RGB image is multiplied by 256. To obtain the original values, divide the intensity values by 256. Refer to the blue channel on how to retrieve the offset and resolution values.
Blue	Stamp information. Stamps are 64-bit auxiliary information related to the height map and intensity content. The next table explains how the stamps are packed into the blue

Channel	Details
	pixel channel See *Data Results* on page 362 for an explanation of the stamp information.

The following table shows how the stamp information is packed into the blue channel. A stamp is a 64-bit value packed into four consecutive 16-bit blue pixels, with the first byte position storing the most significant byte.

Stamp Information from GenTL driver

Stamp Index	Blue Pixel Position	Details
0	0..3	Version
1	4..7	Frame Count
2	8..11	Timestamp (µs)
3	12..15	Encoder value (ticks)
4	16..19	Encoder index (ticks) This is the encoder value when the last index is triggered
5	20..23	Digital input states
6	24..27	X offset (nm)
7	28..31	X resolution(nm)
8	32..35	Y offset (nm)
9	36..39	Y resolution (nm)
10	40..43	Z offset (nm)
11	44..47	Z resolution (nm)
12	48..51	Height map Width (in pixels)
13	52..55	Height map length (in pixels)
14	56..59	Specify if the intensity is enabled

16-bit Grey Scale Image

When the 16-bit grey scale format is used, the height map, intensity, and stamps are stored sequentially in the grey scale image.

The last row of the image contains the stamp information.

Rows	Details
0 .. (max part height - 1)	Height map information. The width and height of the image represent the dimensions in the X and Y axis. Together with the pixel value, each pixel presents a 3D point in the real-world coordinates. The following formula can be used to calculate the real-world coordinates (X, Y, Z) from pixel coordinates (Px, Py, Pz): X = X offset + Px * X resolution

Rows	Details
	Y = Y offset + Py * Y resolution Z = Z offset + Pz * Z resolution Refer to the blue channel on how to retrieve the offset and resolution values. If Pz is 0 if the data is invalid. The Z offset is fixed to -32768 * Z Resolution. Z is zero if Pz is 32768.
(max part height) .. 2* (max part height) If intensity is enabled	Intensity information. The width and height of the image represent the dimension in the X and the Y axis. Together with the pixel value, each blue pixel represents an intensity value in the real-world coordinates. The following formula can be used to calculate the real-world coordinates (X, Y, Z) from pixel coordinates (Px, Py, Pz): The following formula assumes Py is relative to the first row of the intensity information, not the first row of the whole 16-bit grey scale image. X = X offset + Px * X resolution Y = Y offset + Py * Y resolution Z = 16-bit intensity value This intensity value is 0 if the intensity image is not available. Gocator outputs 8-bit intensity values. The values stored in the 16-bit Grey scale image is multiplied by 256. To obtain the original values, divide the intensity values by 256. Refer to the stamps on how to retrieve the offset and resolution values.
The last row of the 16-bit grey scale image	Stamp information. Stamps are 64-bit auxiliary information related to the height map and intensity content. The next table explains how the stamps are packed into the blue pixel channel See *Data Results* on page 362 for an explanation of the stamp information.

The following table shows how the stamp information is packed into the last row. A stamp is a 64-bit value packed into four consecutive 16-bit pixels, with the first byte position storing the most significant byte.

Stamp Information from GenTL driver

Stamp Index	Column Position	Details
0	0..3	Version
1	4..7	Frame Count
2	8..11	Timestamp (µs)
3	12..15	Encoder value (ticks)
4	16..19	Encoder index (ticks) This is the encoder value when the last index is triggered
5	20..23	Digital input states
6	24..27	X offset (nm)
7	28..31	X resolution(nm)
8	32..35	Y offset (nm)

Stamp Index	Column Position	Details
9	36..39	Y resolution (nm)
10	40..43	Z offset (nm)
11	44..47	Z resolution (nm)
12	48..51	Height map Width (in pixels)
13	52..55	Height map length (in pixels)
14	56..59	Specify if intensity is enabled or not

Registers

GenTL registers are multiples of 32 bits. The registers are used to control the operation of the GenTL driver, send commands to the sensors, or to report the current sensor information.

Register Map Overview

Register Address	Name	Read/Write	Length (bytes)	Description
260	WidthReg	RO	4	Specify the width of the returned images. The part height map is truncated if it is wider than the specified width.
264	HeightReg	RO	4	Specify the height of the returned images (i.e., length of the part). The part height map is truncated if it is longer than the specified length.
292	ResampleMode	RO	4	Enable the resampling logic in the GenTL driver 0 – Disable resampling 1 – Enable resampling When resampling is enabled, the GenTL driver will resample the height map so that the pixel spacing is the same in the X and Y axis.
296	EncoderValue0	RO	4	Report the current encoder value (least significant 32-bit). The current encoder value is latched from the sensor when this register is read.
300	EncoderValue1	RO	4	Report the current encoder value (most significant 32-bit). The encoder value is latched when EncoderValue0 register is read. User should read EncoderValue0 before reading EncoderValue1.
304	Configuration File	RW	16	Read the name of sensor live configuration file or switch (write) the sensor configuration file. The configuration name is NULL terminated and includes the extension ".job". Writing to this register causes the sensor to switch to the specified configuration.

Register Address	Name	Read/Write	Length (bytes)	Description
320	Transformation X offset	RO	4	Return the sensor transformation X offset
324	Transformation Z offset	RO	4	Return the sensor transformation Z offset
328	Transformation Angle	RO	4	Return the sensor transformation angle
332	Transformation Orientation	RO	4	Return the sensor transformation orientation
336	Clearance distance	RO	4	Return the sensor clearance distance

XML Settings File

The settings file, Go2GenTL.xml, resides in the same directory as the Gocator GenTL driver. Users can set the resample mode and output format by changing the setting in this file.

Element	Type	Description
ResampleMode	32u	Settings to disable or enable resampling mode: 0 – Disable 1 – Enable When resampling mode is enabled, the GenTL driver will resample the height map so that the pixel spacing is the same in the X and Y axis. The default value is 1.
DataFormat	32u	Settings to choose 16-bit RGB or 16-bit grey scale image output: 0 – 16-bit RGB Image 1 – 16-bit grey scale Image The default value is 0.

Interfacing with Halcon

Halcon is a comprehensive software package for machine vision applications with an integrated development environment. Gocator can use the included GenTL driver to stream 3D point clouds and intensity data into Halcon in real-time.

> The Gocator 4.x GenTL driver does not currently support scanning in profile mode.

For information on setting up the GenTL driver, see *GenTL Driver* on page 412.

This section describes how to configure Halcon to acquire data from the Gocator 4.x firmware. You should be familiar with Gocator's Surface mode. Before continuing, make sure Halcon is installed.

Requirements

Sensor	Gocator laser profile sensor
Firmware	Firmware 4.0.9.136 or later
Halcon	Version 10.0 or later

Setting Up Halcon


Before using Halcon with Gocator, you must set up Halcon.

To set up Halcon:


1. Connect a Gocator sensor to the PC running Halcon.

   You will need a Master hub to connect the sensor to the PC. For more information, see *Installation* on page 26 and *Network Setup* on page 33.

2. Click the **Scan** page icon.



3. On the **Scan** page, click the **Surface** icon to switch to Surface mode.

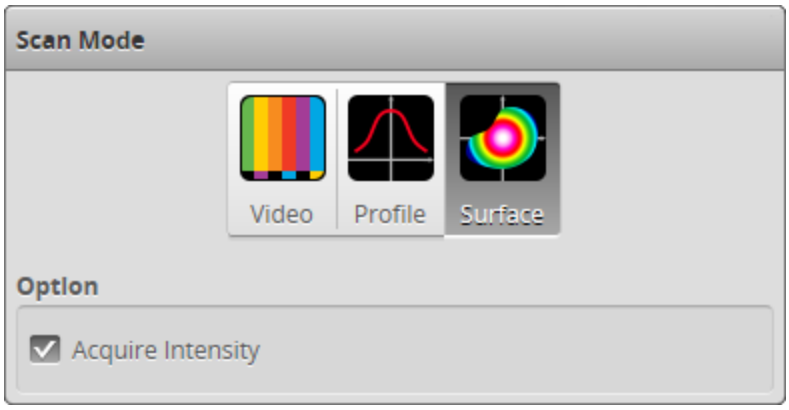


4. (Optional) If you need intensity data, check the **Acquire Intensity** option.
5. Configure the sensor to produce the desired surface data.

   For more information on configuring Gocator sensors, see *Scan Setup and Alignment* on page 81 and *Models* on page 127.

6. Click the **Output** page icon.




7. On the **Output** page, enable the required surface under **Data** and choose Gocator in **Protocol**.

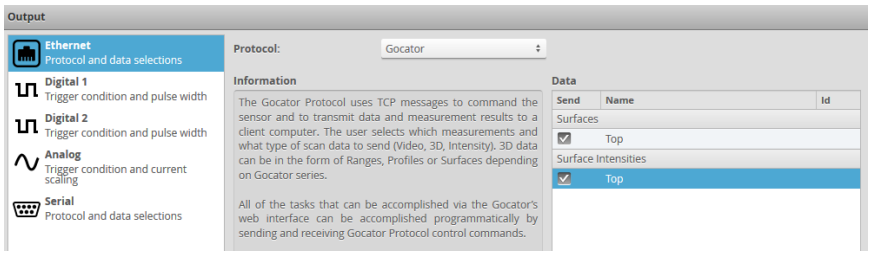

For more information on configuring Ethernet output, see *Ethernet Output* on page 230.


8. Make sure the Gocator is running.
9. On the PC, launch Halcon.
10. In Halcon, in the **Assistants** menu, click **Open New Image Acquisition**.
11. In the dialog that opens, in the **Source** tab, check the **Image Acquisition Interface** option and choose `GenICamTL` in the drop-down.

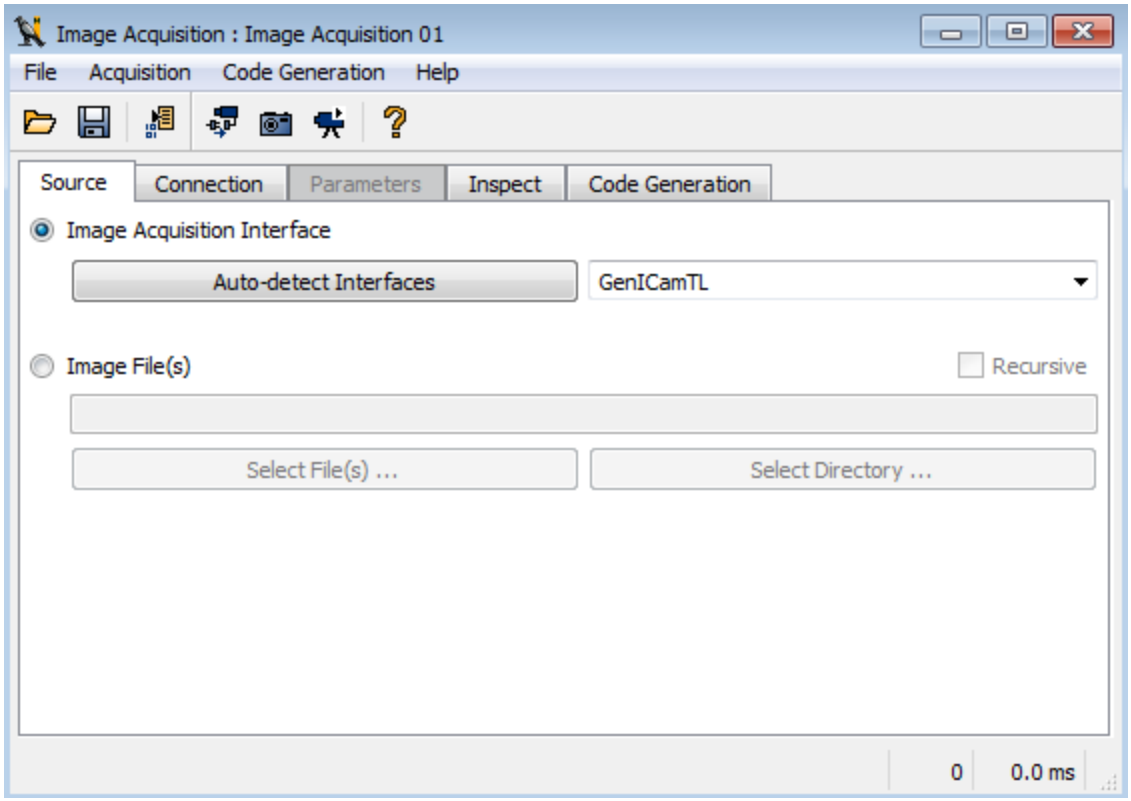

> The driver uses the Gocator protocol discovery messages to search for available Gocator sensors. Discovery messages can be blocked by a PC's firewall. You should therefore turn off the firewall and try again if the Gocator sensor can't be detected.

12. Switch to the **Connection** tab.


    If Halcon detects a Gocator sensor, the sensor's IP will be listed next to **Device**.

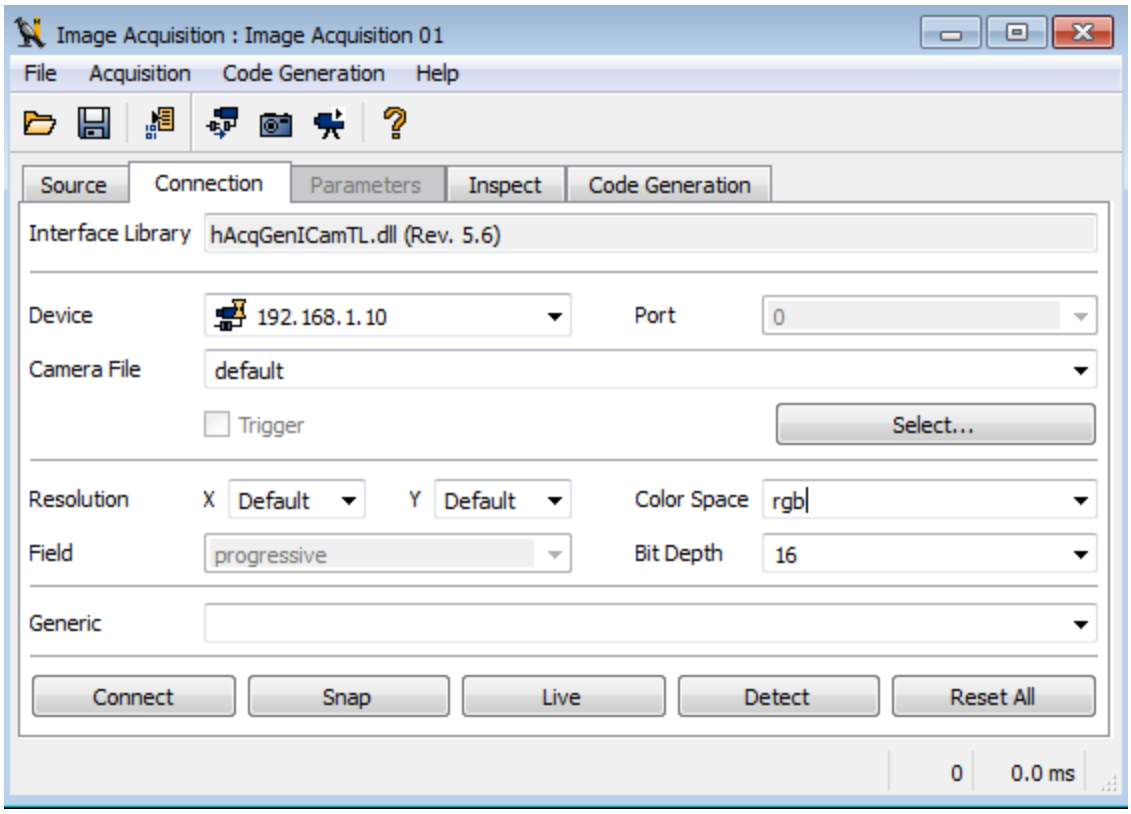

13. In the **Connection** tab, set **Color Space** to `RGB` and **Bit Depth** to `16`.
14. In the Gocator web interface, click the Snapshot button to trigger the output of a surface.



The output displays in the Halcon **Graphics Window**.

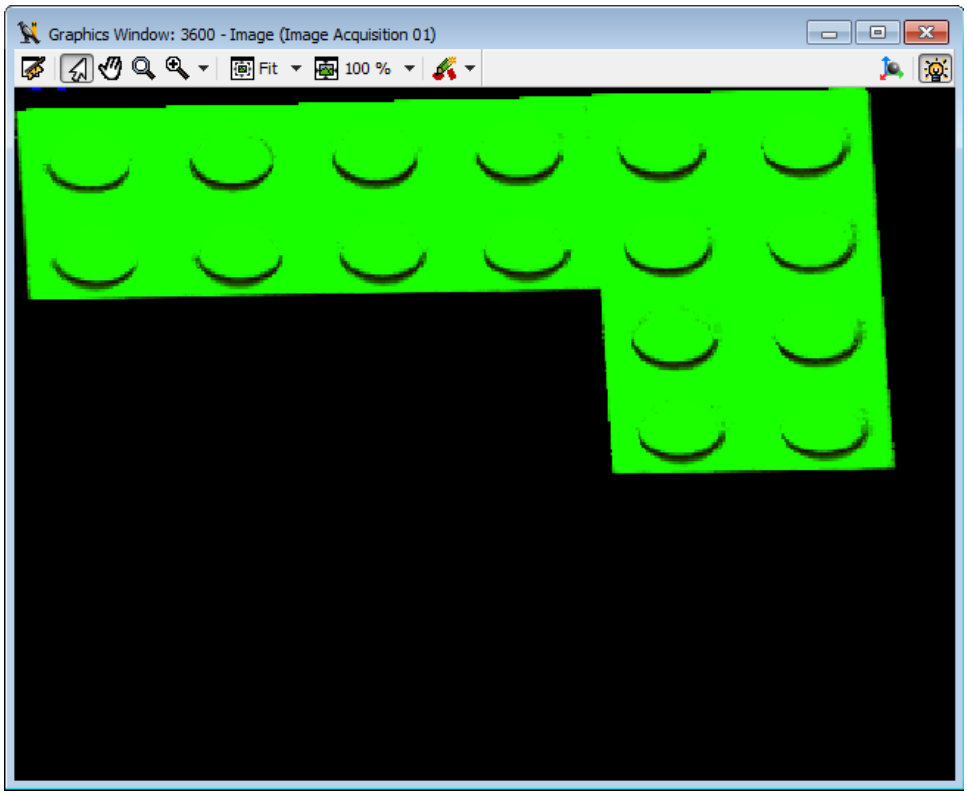

Halcon is now configured for use with Gocator.

Halcon Procedures

The Halcon example code contains internal procedures that you can use to decompose the RGB image and to control registers that the GenTL driver opens.

You can import the procedures into your own code by selecting File > Insert Program > Insert Procedures and then choosing the example code `Continuous_Acq.hdev` under the `Examples/Halcon` directory.

> The Go2GenTL.xml file for Gocator 4.x has more fields than the Gocator 3.x version. Make sure you are using the correct version.

The following section describes each of these procedures.

Halcon Procedures

Procedures	Description
Go2GenTL_ ParseData	The GenTL driver packs the height map, intensity and stamp information into a 16-bit RGB image. The function is used to extract data from the RGB image. For details on how the information is packed in the data, see the sections under *GenTL Driver* on page 412. The function accepts the image acquired from `grab_image_async`, and returns the height map, intensity and stamps. *Parameters (Input)* **Image**: RGB Image acquired by using `grab_image_async`.

Procedures	Description
	Parameters (Output) **HeightMap**: The height map image. **Intensity**: The intensity image. **FrameCount**: The number of frames. **Timestamp**: The timestamp. **Encoder**: The encoder position. **EncoderIndex**: The last index of the encoder. **Inputs**: The digital input states. **xOffset**: The X offset in millimeters. **xResolution**: The X resolution in millimeters. **yOffset**: The Y offset in millimeters. **yResolution**: The Y resolution in millimeters. **zOffset**: The Z offset in millimeters. **zResolution**: The Z resolution in millimeters. **Width**: The width (number of columns) of the image that contains the part. The part width can be less than the image width requested by the user. **Height**: The height or length (number of rows) of the image that contains the part. The part length can be less than the image height requested by the user. **HasIntensity**: Specifies if the intensity image is available. The intensity image is available if **Acquire Intensity** is enabled in the Gocator web interface. Each output is returned as decimal value. *Example* `Go2GenTL_ParseData(Image, HeightMap, Intensity, frameCount, timestamp, encoderPosition, encoderIndex, inputs, xOffset, xResolution, yOffset, yResolution, zOffset, zResolution, width, height, hasIntensity)`
Go2GenTL_ ResampleMode	Returns the resample mode. *Parameters (Input)* **AcqHandle**: Acquisition handle created by `open_framegrabber`. *Parameters (Output)* **ResampleMode**: No - Resample is disabled. Yes - Resample is enabled. When resampling is enabled, the GenTL driver resamples the height map so that the pixel spacing is the same on the X and Y axis. *Example* `Go2GenTL_ResampleMode (AcqHandle, ResampleMode)` To set the resample mode, you must directly modify Go2GenTL.xml, which is in the same directory as the Gocator GenTL driver (Go2GenTL.cti).
Go2GenTL_ ConfigFileName	Returns the current live sensor job file name. *Parameters (Input)* **AcqHandle**: Acquisition handle created by `open_framegrabber`.

Procedures	Description
	Parameters (Output) **ConfigFile**: The name of the job file. The file name includes the extension .job. *Example* `Go2GenTL_ConfigFileName (AcqHandle, ConfigFile)`
Go2GenTL_ SetConfigFileName	Sets the sensor live configuration. *Parameters (Input)* **AcqHandle**: Acquisition handle created by `open_framegrabber`. **ConfigFile**: The name of the job file. The file name should include the extension .job. *Example* `Go2GenTL_SetConfigFileName (AcqHandle, 'test2.cfg')`
Go2GenTL_ Encoder	Returns the current encoder value. When this function is called, the GenTL driver retrieves the latest encoder value from the sensor. The value is returned as a two-element tuple. The first element is the least significant 32-bit value, and the second element is the most significant 32-bit value. *Parameters (Input)* **AcqHandle**: Acquisition handle created by `open_framegrabber`. *Parameters (Output)* **EncoderValue**: The current encoder value. *Example* `Go2GenTL_Encoder(AcqHandle, EncoderValue)`
Go2GenTL_ ImageSize	Returns the size of the image returned by the GenTL driver. *Parameters (Input)* **AcqHandle**: Acquisition handle created by `open_framegrabber`. *Parameters (Output)* **Width**: The width of the image. **Height**: The height of the image. *Example* `Go2GenTL_ImageSize(AcqHandle, Width, Height)`
Go2GenTL_ CoordinateXYZ	Returns the real-world coordinates (X, Y, Z) of the part given the row and column position in the height map. The values of the offset and resolution input parameters can be retrieved using Go2GenTL_ ParseData. *Parameters (Input)* **HeightMap**: The height map image. **Row**: The row in the height map. **Column**: The column in the height map. **xOffset**: The X offset in millimeters. **xResolution**: The X resolution in millimeters. **yOffset**: The Y offset in millimeters. **yResoluion**: The Y resolution in millimeters. **zOffset**: The Z offset in millimeters.

Procedures	Description
	zResolution: The Z resolution in millimeters. *Parameters (Output)* **coordinateXYZ**: The real-world coordinates.
Go2GenTL_ Exposure	Returns the current exposure. *Parameters (Input)* **AcqHandle**: Acquisition handle created by `open_framegrabber`. *Parameters (Output)* **Exposure**: The current exposure value (in µs). The value is returned as an integer. Decimals are truncated. *Example* `Go2GenTL_Exposure(AcqHandle, exposure)`
Go2GenTL_ SetExposure	Sets the current exposure. *Parameters (Input)* **AcqHandle**: Acquisition handle created by `open_framegrabber`. **Exposure**: The current exposure value (in µs), as an integer. *Example* `Go2GenTL_SetExposure(AcqHandle, exposure)`


set_ framegrabber_ param	Generic Halcon function to set parameters on the scanner. Can be used to set scanner specific settings. See the SDK interface files for a complete list of settings that can be changed. In the generic form:
	`set_framegrabber_param( AcqHandle, 'Name', 'Value')`
	
	Parameters (Input)
	AcqHandle: Acquisition handle created by `open_framegrabber`.
	Name: The name of the parameter to set on the scanner.
	AcqHandle: The parameter value to set on the scanner.
	
	Examples
	To set the format of the image buffer to 16-bit packed:
	`set_framegrabber_param( AcqHandle, 'PixelFormat', 'RGB16Packed')`
	To set the Scan mode to HDR (1 = no HDR, 2 = HDR, 3 = Super HDR):
	`set_framegrabber_param( AcqHandle, 'Dynamic', '2')`
	To set the ebrightness to '3':
	`set_framegrabber_param( AcqHandle, 'Exposure', '3')`

Generating Halcon Acquisition Code

Halcon lets you insert acquisition code into your code in the IDE.

To generate acquisition code:

1. In Halcon, in the **Assistants** menu, click **Open New Image Acquisition**.
2. In the dialog that opens, in the **Code Generation** tab, set **Acquisition Mode** to **Asynchronous Acquisition**.

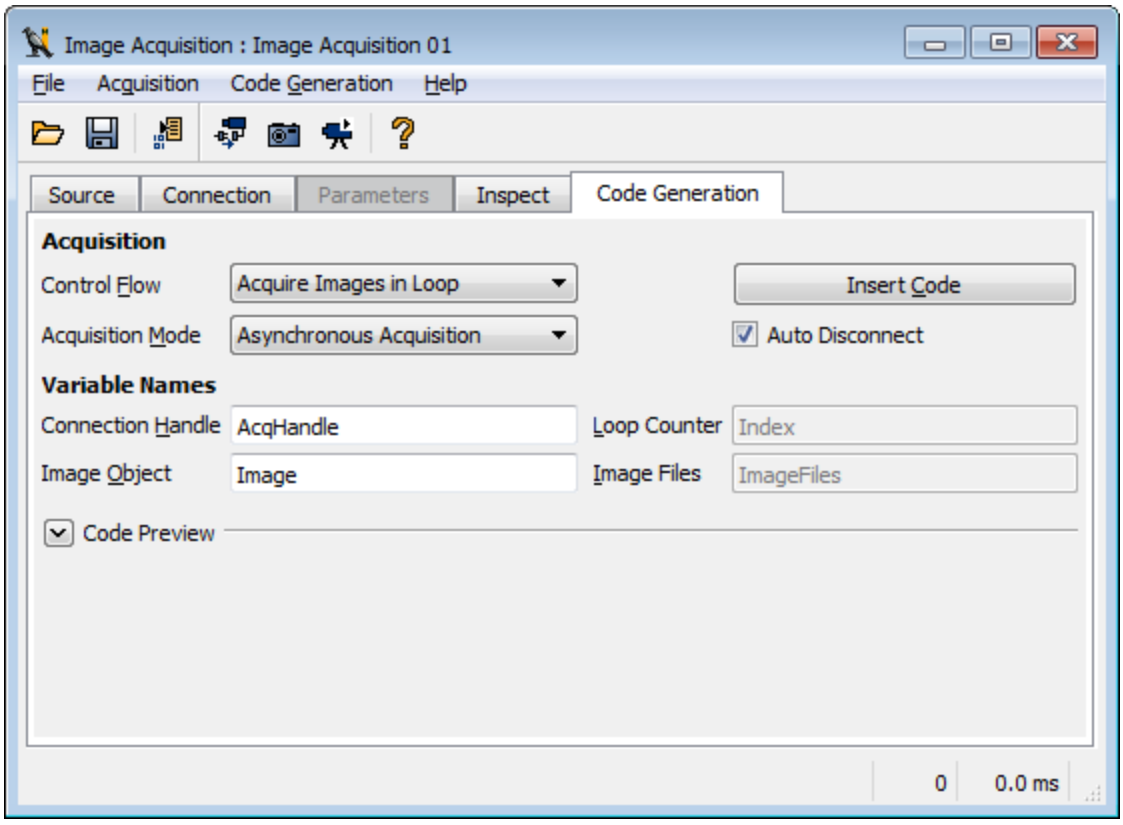

3. Under **Acquisition**, click **Insert Code** to generate the code that will open the acquisition device.

> To handle cases when the `grab_image` function times out while waiting for data, add a `try-catch` statement around the `grab_image` function code.

After the example code is generated, you should add a `catch` instruction to bypass the acquisition timeout event, and use the Go2GenTL_ParseData function to extract information from the returned image.

An example, `Continuous_Acq.hdev`, is included in the `Examples/Halcon` directory and is shown below:

```
* This example illustrates how to do the following:
* 1. Acquire data from the Gocator (16-bit RGB or gray image)
* 2. Decompose the returned image into three separate image for height map, intensity and
stamps.
* 3. Extract some stamp values from the stamp image.
* Connect to the Gocator device. This code is auto generated by the Image Acquisition
dialog box. User can manually override the directory path by editing the line below.
* Set image type to 'rgb' if the format is 16-bit RGB. 'gray' if the format is 16-bit
mono
open_framegrabber ('GenICamTL', 0, 0, 0, 0, 0, 0, 'progressive', 16, 'rgb', -1, 'false',
'default', '192.168.1.10', 0, -1, AcqHandle)
grab_image_start (AcqHandle, -1)
while (true)
 try
```

```
  grab_image_async (Image, AcqHandle, -1)
 catch(Exception)
  continue
 endtry

 Go2GenTL_ParseData (Image, HeightMap, Intensity, frameCount, timestamp, encoderPosition,
encoderIndex, inputs, xOffset, xResolution, yOffset, yResolution, zOffset, zResolution,
width, height, hasIntensity)

 * Image Processing Routines Start ****

 * Add your own routines here!

 * Image Processing Routines End ****
endwhile
close_framegrabber (AcqHandle)
```

CSV Converter Tool


After you have exported recorded data to CSV, you can use the Gocator CSV Converter Tool to convert the exported profile or part data into the following formats:

- ASCII (XYZI)
- 16-bit BMP
- 16-bit PNG
- GenTL
- OBJ
- STL
- HexSight HIG
- ODSCAD's OMC format

You can get the tool package (14405-x.x.x.x_SOFTWARE_GO_Tools.zip) from the LMI Technologies website at http://lmi3d.com/support/downloads/. Click on the link for your sensor, click on Product User Area, and log in.

For more information on exporting recorded data, see see *Downloading, Uploading, and Exporting Replay Data* on page 61.

After downloading the tool package, unzip the file and run the Gocator CSV Converter tool [bin>win32>kCsvConverter.exe].

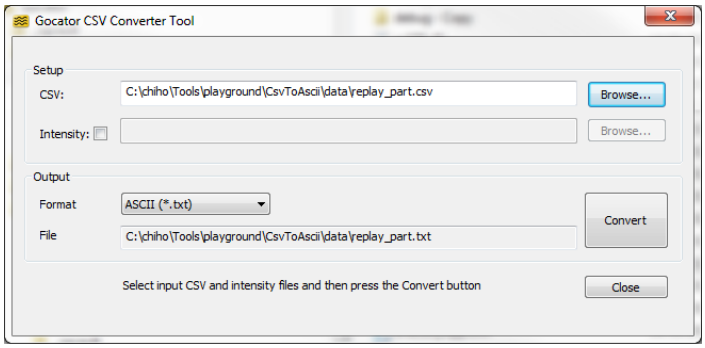

	The software tool supports data exported from Profile or Surface mode.

	The GenTL format is a 48-bit RGB or grey scale PNG. Height map, intensity and stamp information are stored as defined in the GenTL Driver section (see on page 412). You can load the exported data into image processing software to provide simulation data for developing applications using the GenTL driver.

To convert exported CSV into different formats:

1. Select the CSV file to convert.
2. If intensity information is required, check the **Intensity** box and select the intensity bitmap.
   Intensity information is only used when converting to ASCII or GenTL format. If intensity is not selected, the ASCII format will only contain the point coordinates (XYZ).
3. If a dual-sensor system was used, use the **Image** spin box to select the source sensor.
   Use **0** for the Main sensor, **1** for the Buddy sensor.
4. Select the output format.
   The converted file will reside in the same directory as the CSV file. It will also have the same name but with a different file extension. The converted file name is displayed in the **Output File** field.
5. Press the **Convert** button.

Troubleshooting

Review the guidance in this chapter if you are experiencing difficulty with a Gocator sensor system. See *Return Policy* on page 479 for further assistance if the problem that you are experiencing is not described in this section.

Mechanical/Environmental

The sensor is warm.

- It is normal for a sensor to be warm when powered on. A Gocator sensor is typically 15° C warmer than the ambient temperature.

Connection

When attempting to connect to the sensor with a web browser, the sensor is not found (page does not load).

- Verify that the sensor is powered on and connected to the client computer network. The Power Indicator LED should illuminate when the sensor is powered.
- Check that the client computer's network settings are properly configured.
- Ensure that the latest version of Flash is loaded on the client computer.
- Use the LMI Discovery tool to verify that the sensor has the correct network settings. See *Sensor Recovery Tool* on page 410 for more information.

When attempting to log in, the password is not accepted.

- See *Sensor Recovery Tool* on page 410 for steps to reset the password.

Laser Profiling

When the Start button or the Snapshot button is pressed, the sensor does not emit laser light.

- Ensure that the sticker covering the laser emitter window (normally affixed to new sensors) has been removed.
- The laser safety input signal may not be correctly applied. See *Specifications* on page 433 for more information.
- The exposure setting may be too low. See *Exposure* on page 92 for more information on configuring exposure time.
- Use the Snapshot button instead of the Start button to capture a laser profile. If the laser flashes when you use the **Snapshot** button, but not when you use the **Start** button, then the problem could be related to triggering. See *Triggers* on page 83 for information on configuring the trigger source.

The sensor emits laser light, but the Range Indicator LED does not illuminate and/or points are not displayed in the Data Viewer.

- Verify that the measurement target is within the sensor's field of view and measurement range. See *Specifications* on page 433 to review the measurement specifications for your sensor model.
- Check that the exposure time is set to a reasonable level.See *Exposure* on page 92 for more information on configuring exposure time.

Performance

The sensor CPU level is near 100%.

- Consider reducing the speed. If you are using a time or encoder trigger source, see *Triggers* on page 83 for information on reducing the speed. If you are using an external input or software trigger, consider reducing the rate at which you apply triggers.
- Consider reducing the laser profile resolution.
  See *Spacing* on page 96 for more information on configuring resolution.
- Review the measurements that you have programmed and eliminate any unnecessary measurements.

Specifications


The following sections describe the specifications of the Gocator and its associated hardware.

Gocator 2100 & 2300 Series

The Gocator 2100 and 2300 series consists of the following models:

MODEL	2320	2x30	2x40	2342	2x50	2x70	2375	2x80
Data Points / Profile	1280	640 / 1280	640 / 1280	1280	640 / 1280	640 /1280	1280	640 / 1280
Linearity Z (+/- % of MR)	0.01	0.01	0.01	0.01	0.01	0.04	0.05	0.04
Resolution Z (mm)	0.0018 - 0.0030	0.006 - 0.014	0.013 - 0.037	0.015 - 0.040	0.019 - 0.060	0.055 - 0.200	0.154 - 0.56	0.092- 0.488
Resolution X (mm) (Profile Data Interval)								
2100 series	n/a	0.088 - 0.150	0.19 - 0.34	n/a	0.3 - 0.6	0.55 - 1.10	n/a	0.75 - 2.20
2300 series	0.014 - 0.021	0.044 - 0.075	0.095 - 0.170	0.095 - 0.170	0.150 - 0.300	0.275 - 0.550	0.27 - 0.80	0.375 - 1.100
Repeatability Z (µm)	0.4	0.8	1.2	1.2	2	8	n/a	12
Clearance Distance (CD) (mm)	40	90	190	190	300	400	650	350
Measurement Range (MR) (mm)	25	80	210	210	400	500	1350	800
Field of View (FOV) (mm)	18 - 26	47 - 85	96 - 194	64 - 140	158 - 365	308 - 687	345 - 1028	390 - 1260
Recommended Laser Class	2M	2M	3R	3R	3R	3B	3B-N	3B
Other Laser Classes (2300 series only)	3R	3R, 3B	2M, 3B	3B	3B			
Input Voltage (Power)	+24 to +48 VDC (13 W); Ripple +/- 10%						+48 VDC (20 W); Ripple +/- 10%	+24 to +48 VDC (13 W); Ripple +/- 10%
Dimensions (mm)	35x120x149.5	49x75x142	49x75x197	49x75x197	49x75x272	49x75x272	49x75x272	49x75x272
Weight (kg)	0.8	0.74	0.94	0.94	1.3	1.3	1.3	1.3

The following diagram illustrates some of the terms used in the table above.

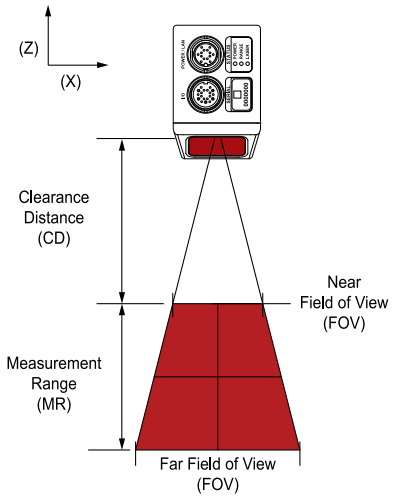

Optical models, laser classes, and packages can be customized. Contact LMI for more details.

Gocator 2300 series sensors provide 1280 data points per profile. Gocator 2100 series sensors provide 640 data points per profile.

Specifications stated are based on standard laser classes. Linearity Z, Resolution Z, and Repeatability Z may vary for other laser classes.

All specification measurements are performed on LMI's standard calibration target (a diffuse, painted white surface).

Linearity Z is the worst case difference in average height measured, compared to the actual position over the measurement range.

Resolution Z is the maximum variability of height measurements across multiple frames, with 95% confidence.

Resolution X is the distance between data points along the laser line.

Repeatability Z is measured with a flat target at the middle of the measurement range. It is the 95% confidence variation of the average height over 4096 frames. Height values are averaged over the full FOV.


See *Resolution and Accuracy* on page 43 for more information.

ALL 2x00 SERIES MODELS	
Scan Rate	Approx. 170Hz to 5000 Hz
Interface	Gigabit Ethernet
Inputs	Differential Encoder, Laser Safety Enable, Trigger
Outputs	2x Digital output, RS-485 Serial (115 kBaud), 1x Analog Output (4 - 20 mA)
Housing	Gasketed aluminum enclosure, IP67
Operating Temp.	0 to 50° C
Storage Temp.	-30 to 70° C


Mechanical dimensions, CD/FOV/MR, and the envelope for each sensor model are illustrated on the following pages.

Gocator 2320


Field of View / Measurement Range

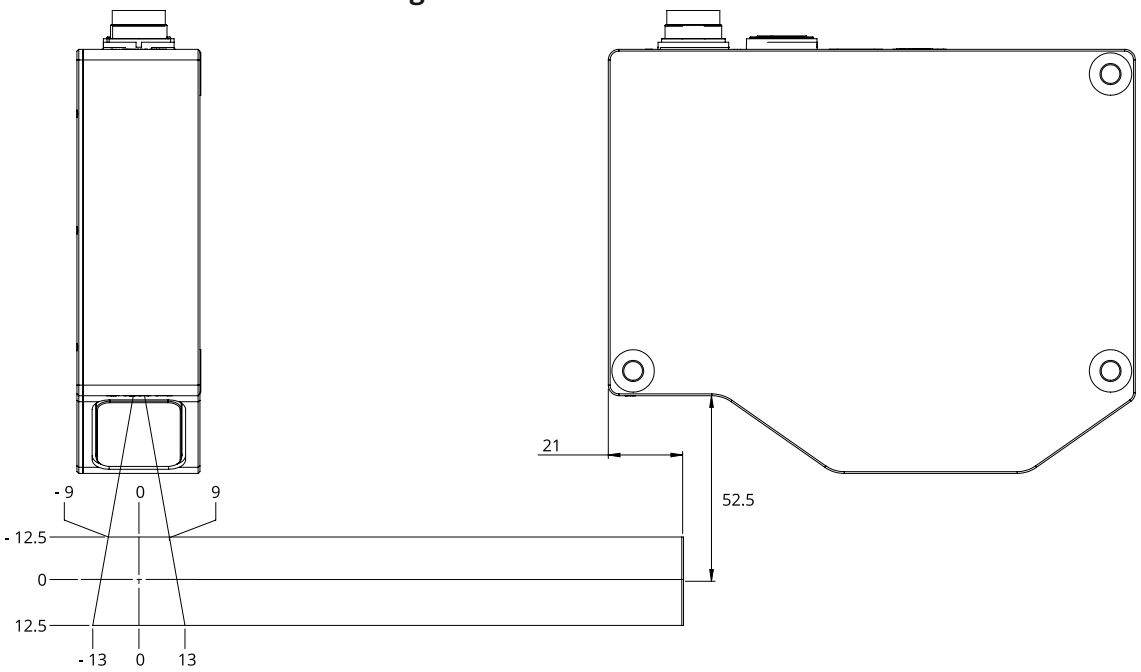

Dimensions

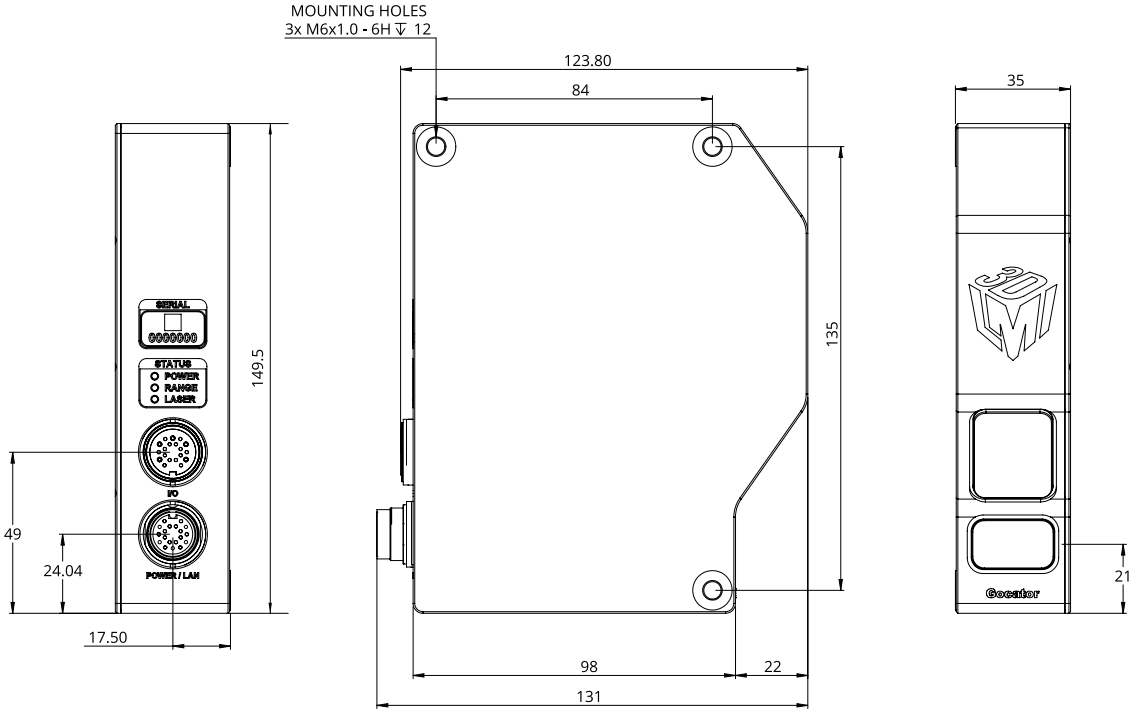


Envelope

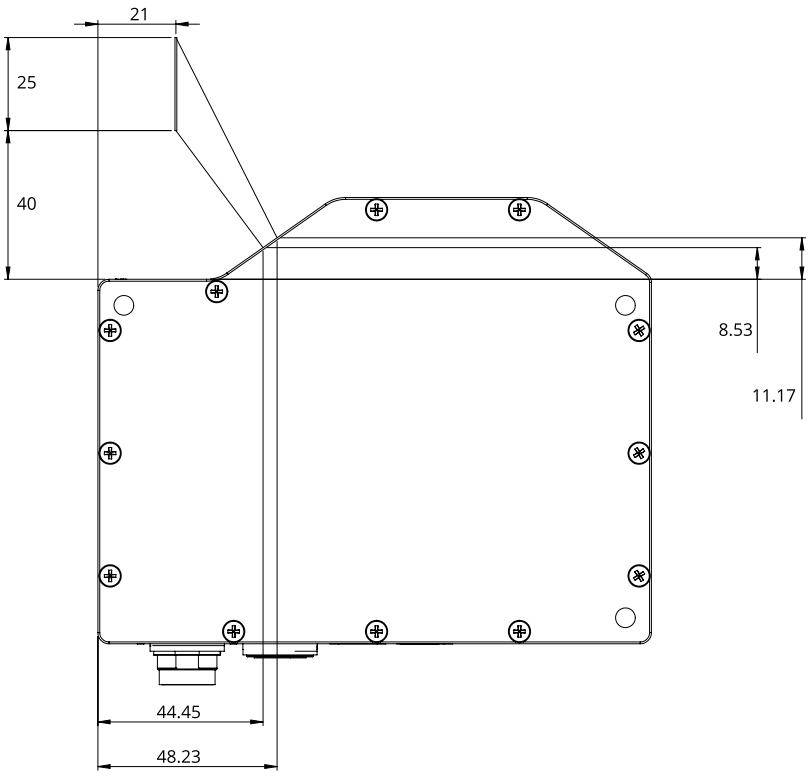


Gocator 2130 and 2330


Field of View / Measurement Range

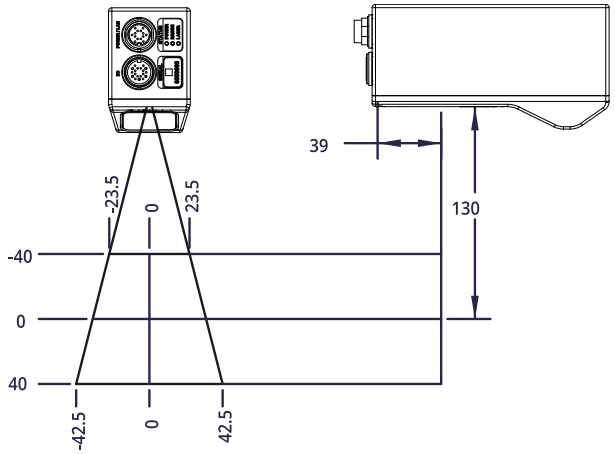

Dimensions

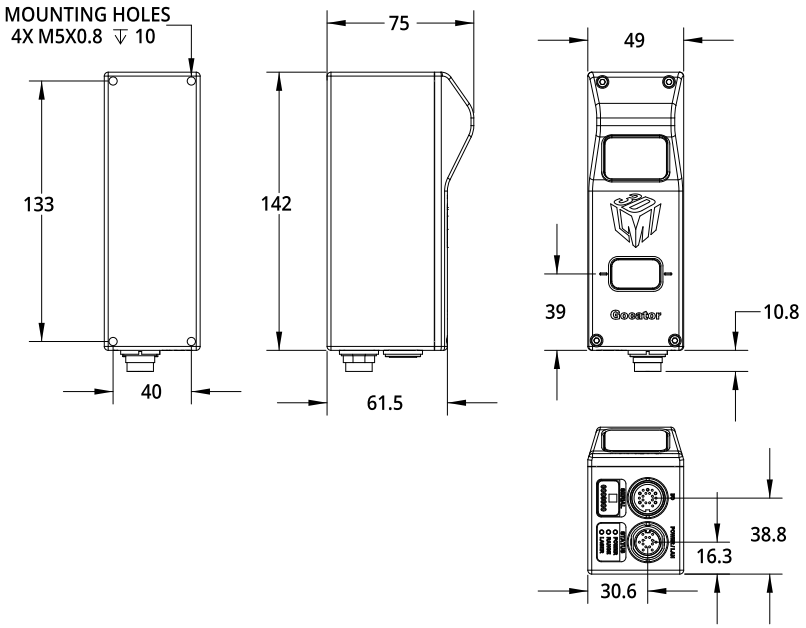


Envelope

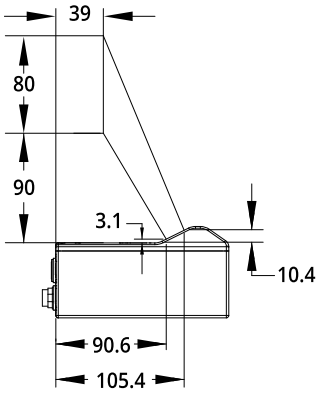


Gocator 2140 and 2340


Field of View / Measurement Range

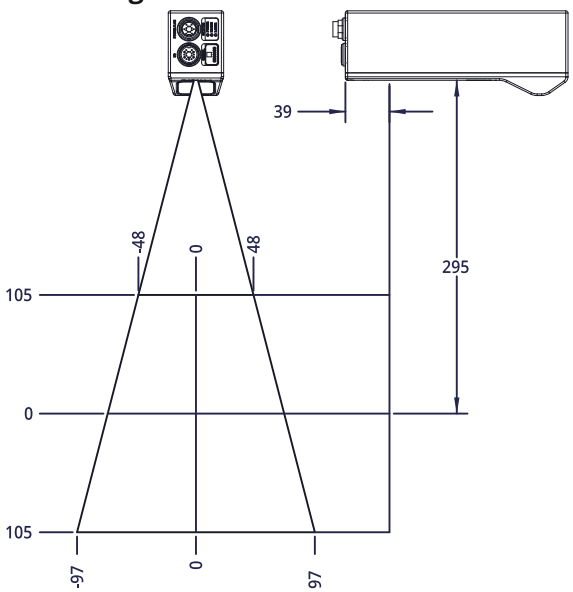

Dimensions

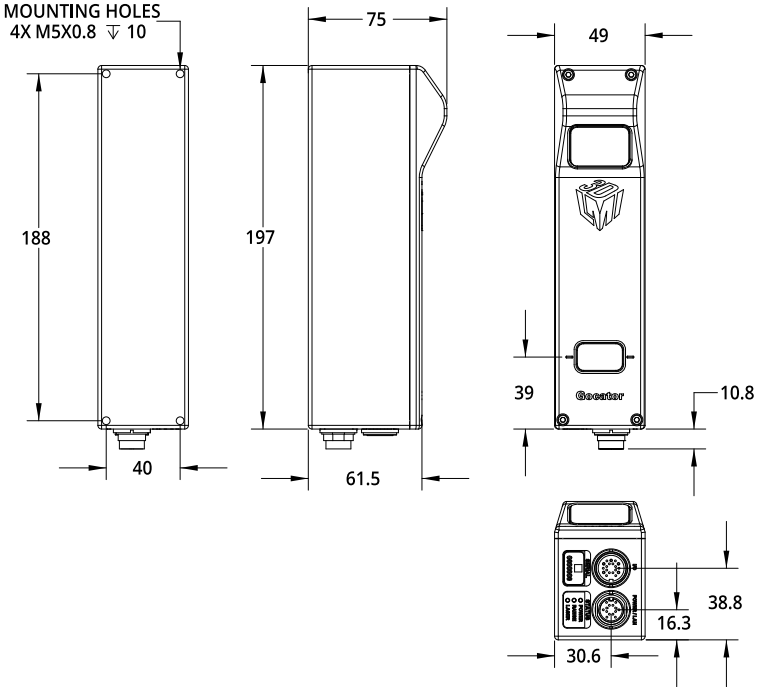


Envelope

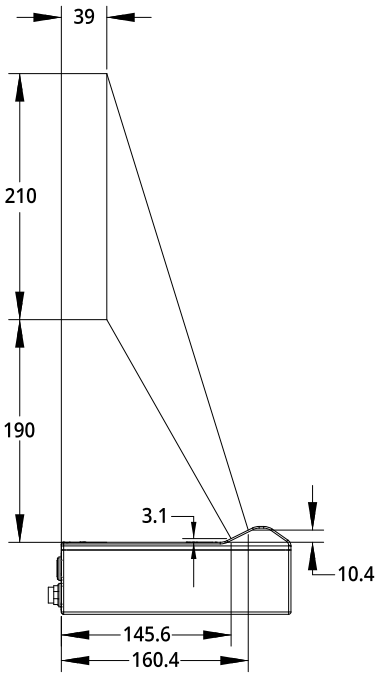


Gocator 2342


Field of View / Measurement Range

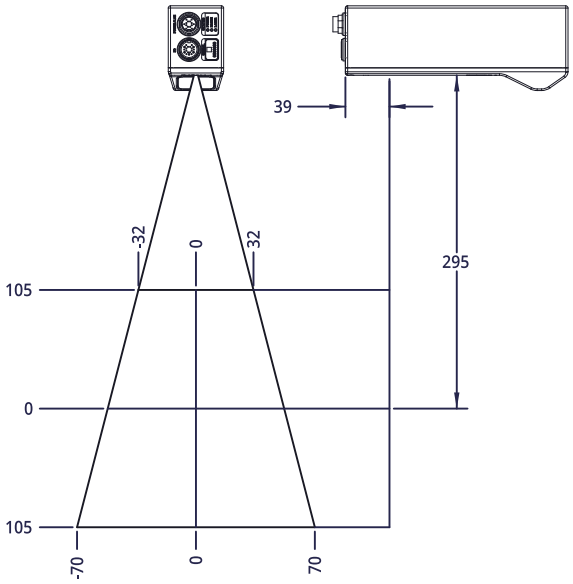

Dimensions

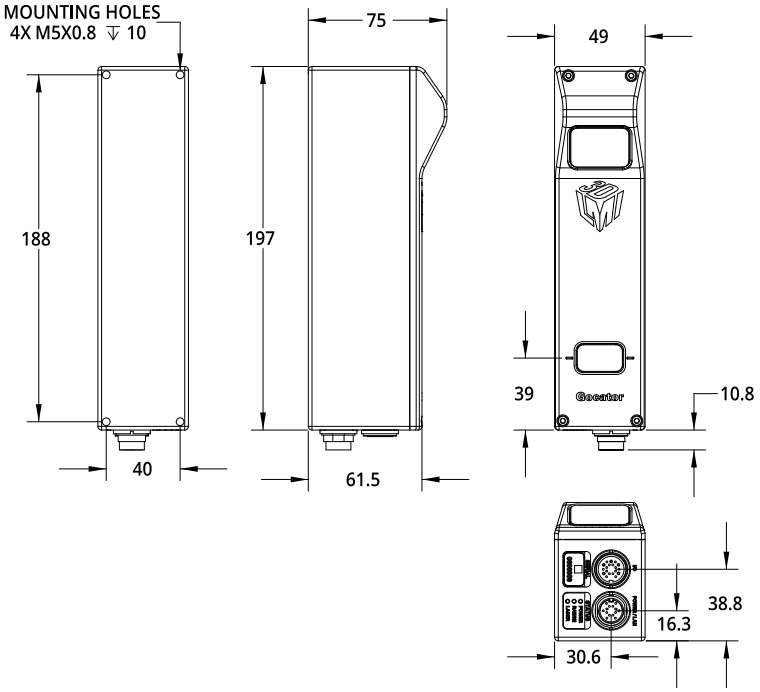


Envelope

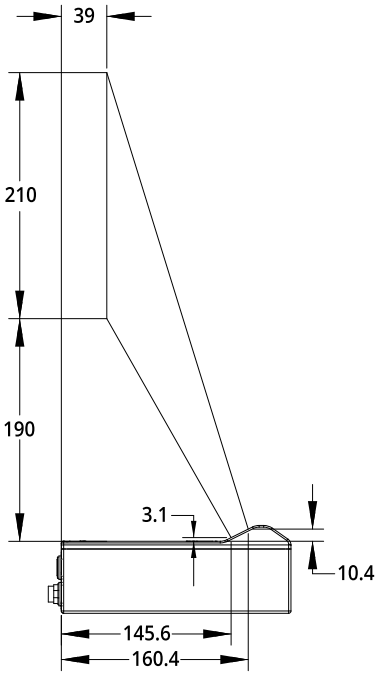


Gocator 2150 and 2350


Field of View / Measurement Range

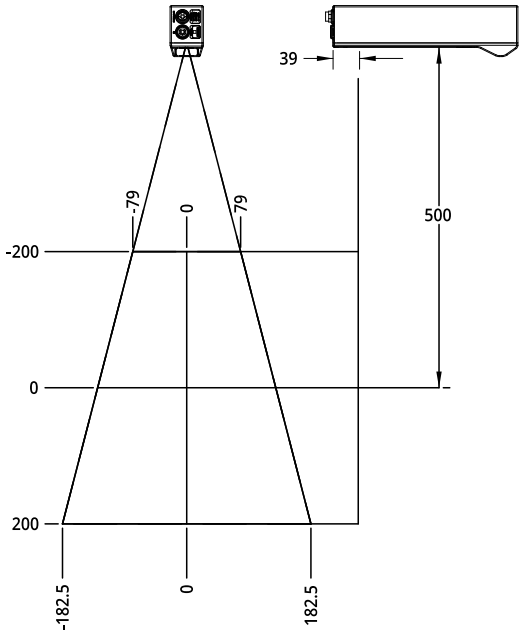

Dimensions

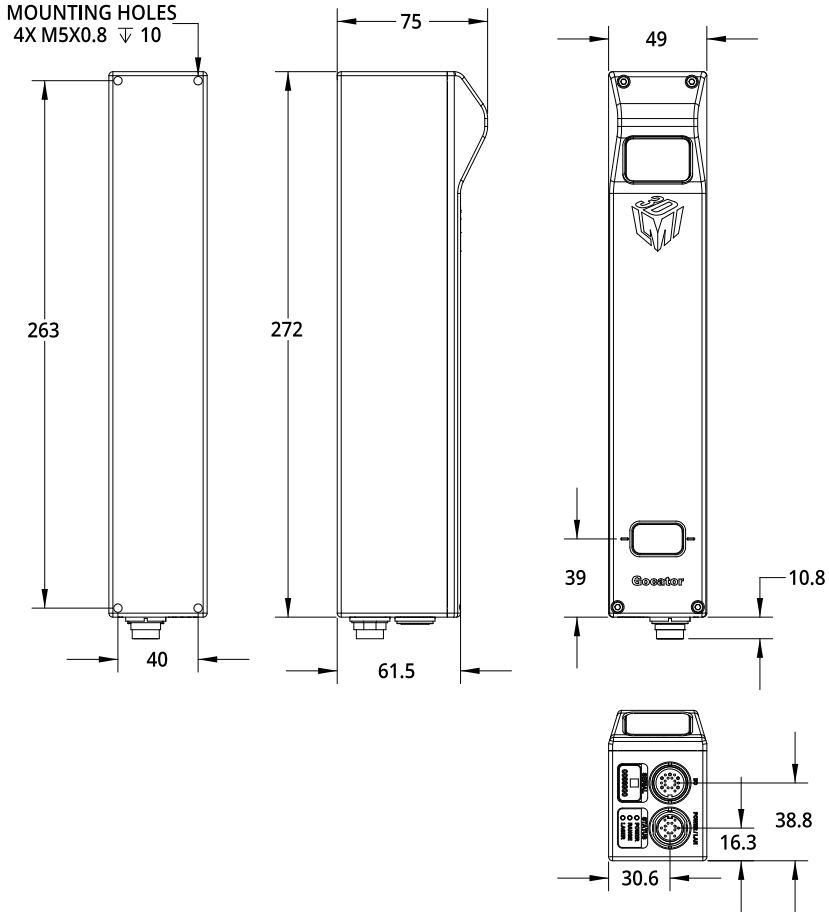


Envelope

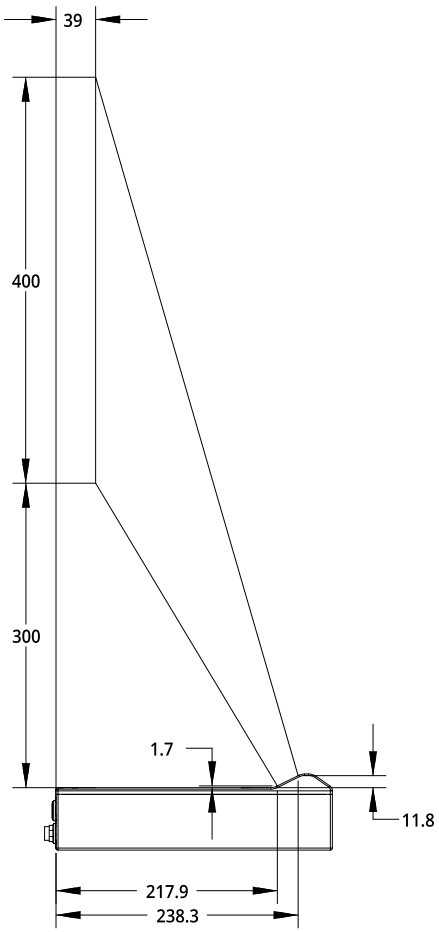


Gocator 2170 and 2370


Field of View / Measurement Range

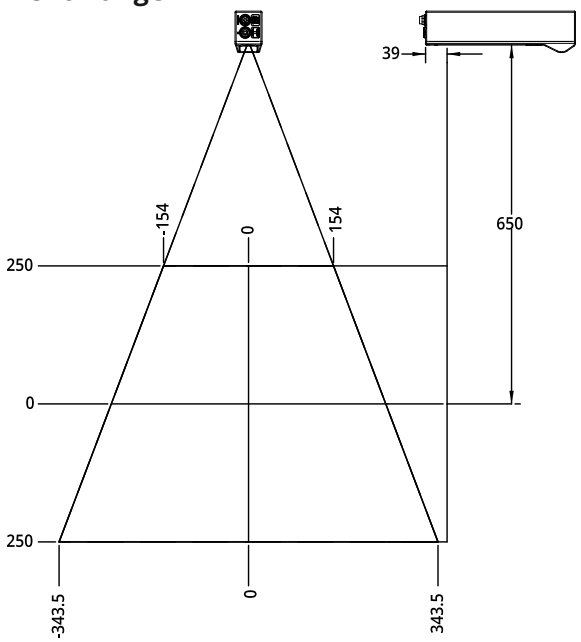

Dimensions

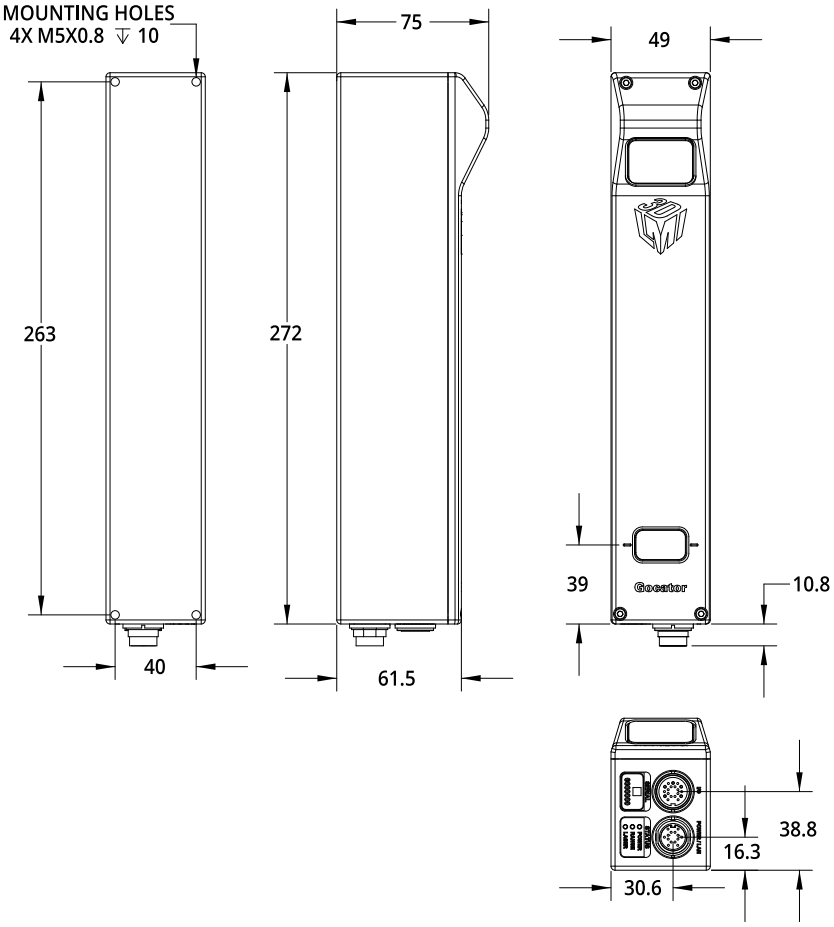

MOUNTING HOLES
4X M5X0.8 ↧ 10
75
49
263
272
39
10.8
40
61.5
38.8
16.3
30.6

Envelope

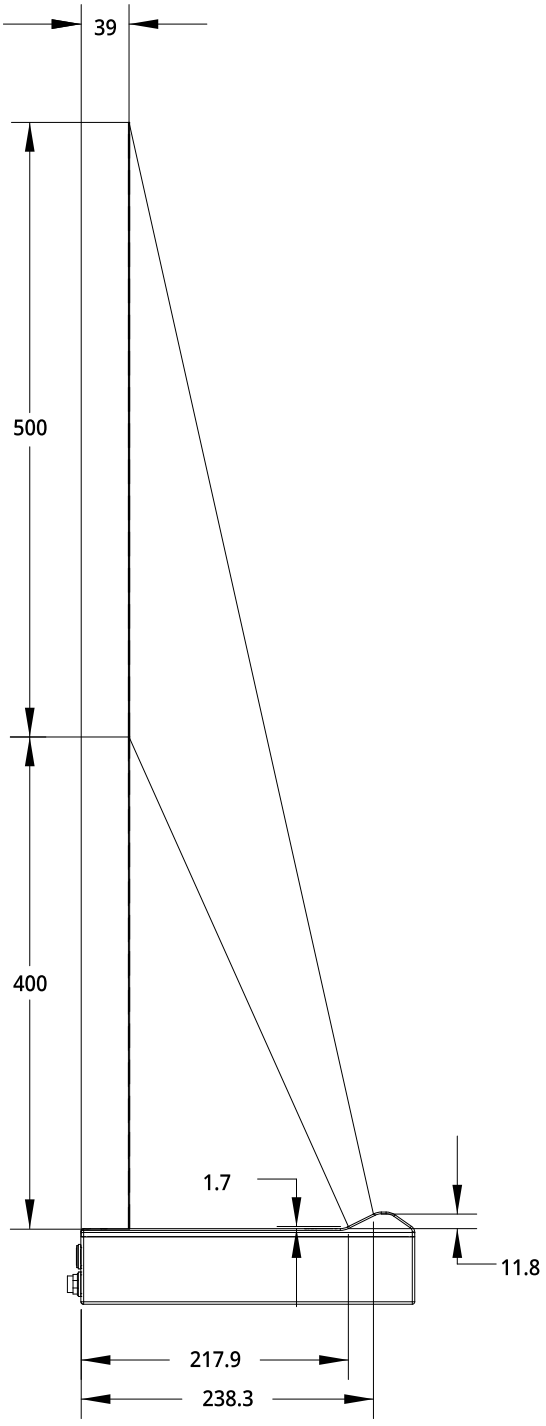


Gocator 2375


Field of View / Measurement Range

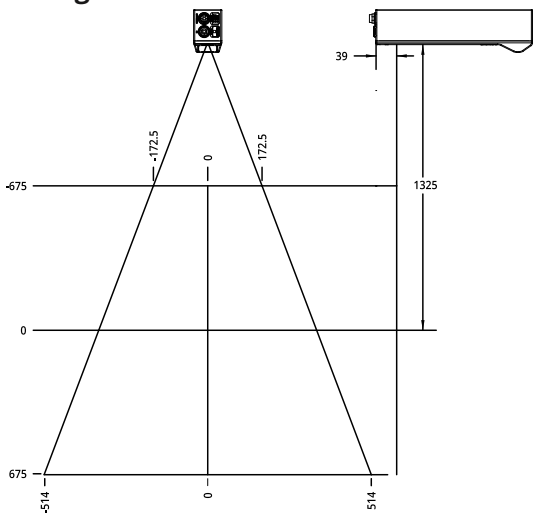

Dimensions

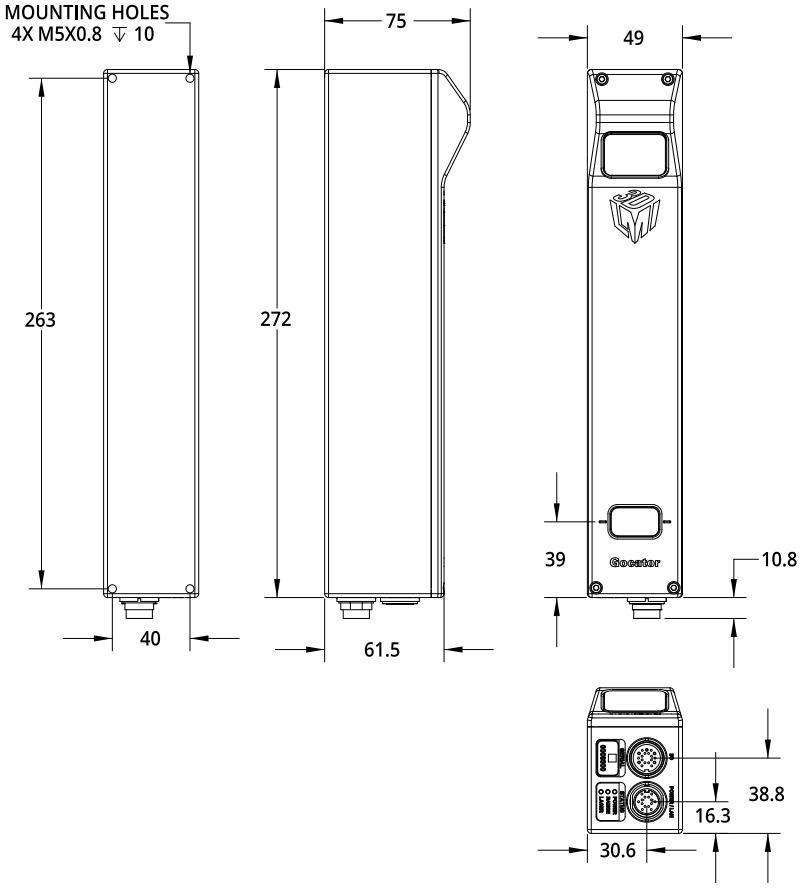


Envelope

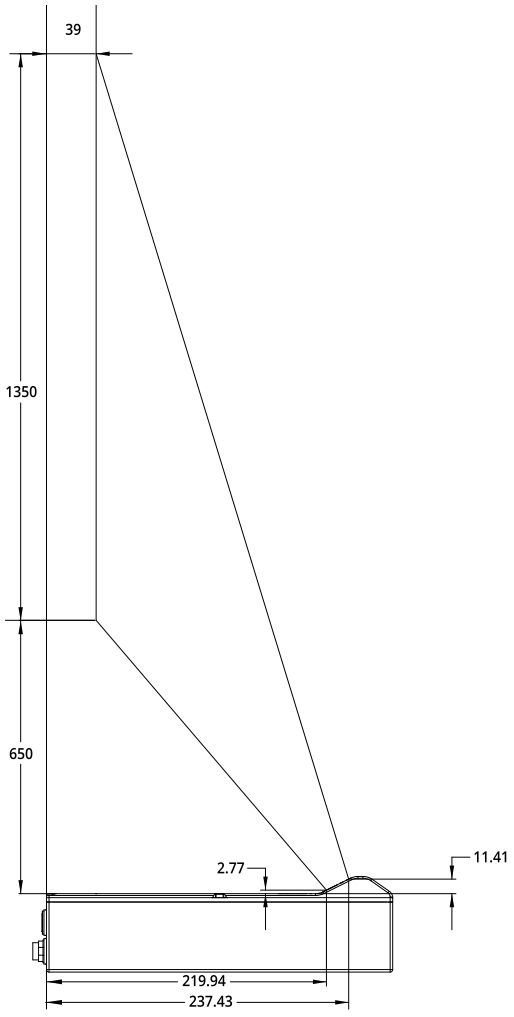


Gocator 2180 and 2380


Field of View / Measurement Range

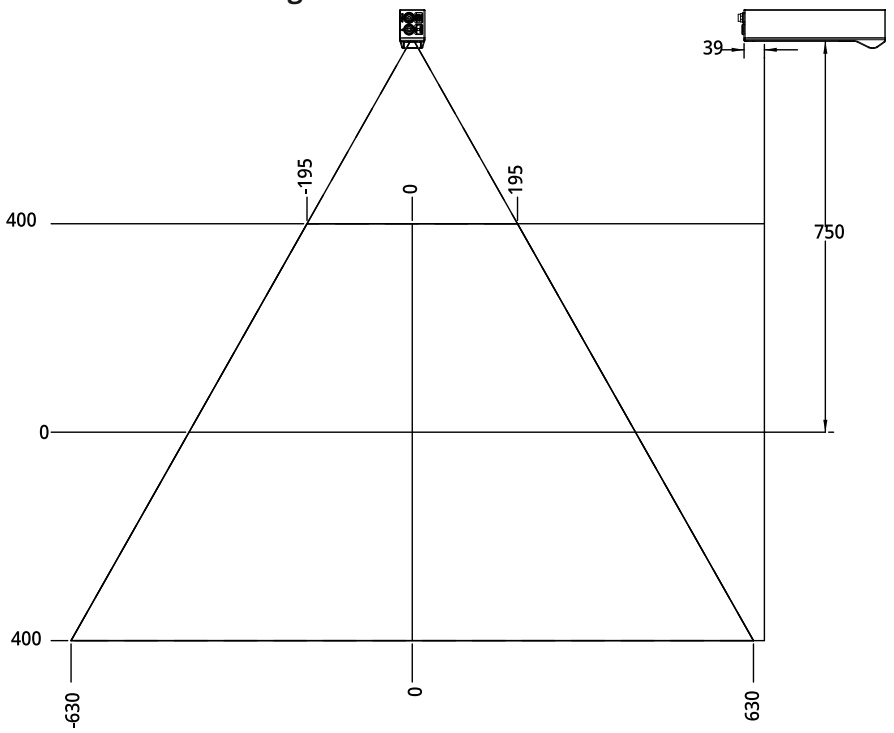

Dimensions

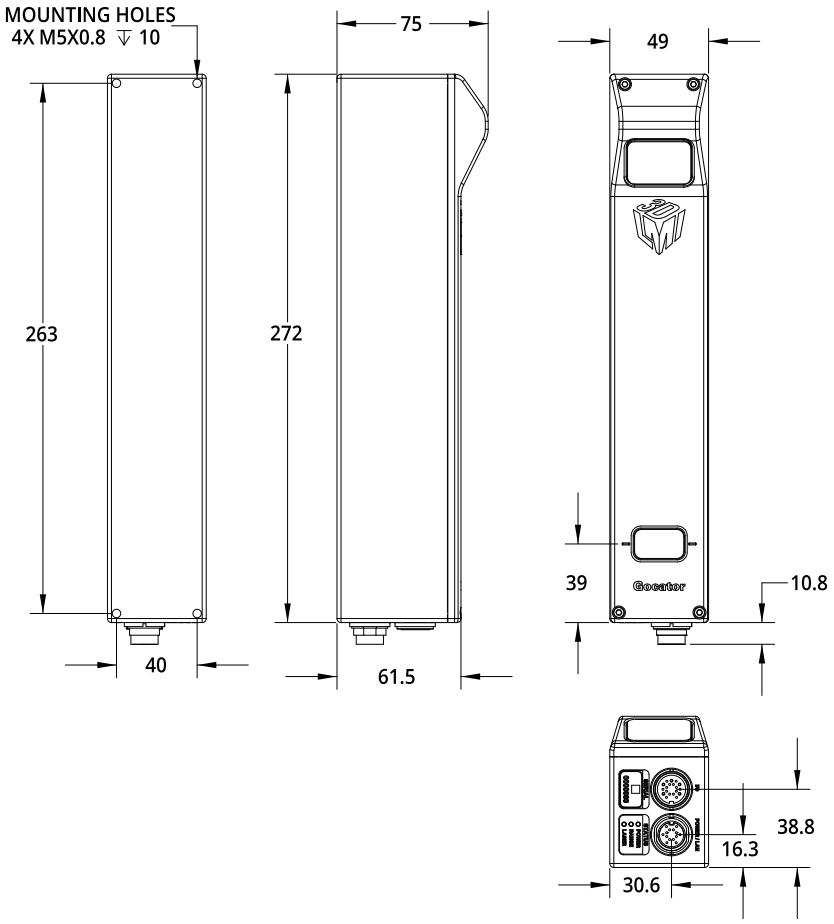
MOUNTING HOLES
4X M5X0.8 ↧ 10
75
49
263
272
39
10.8
40
61.5
38.8
16.3
30.6

Envelope

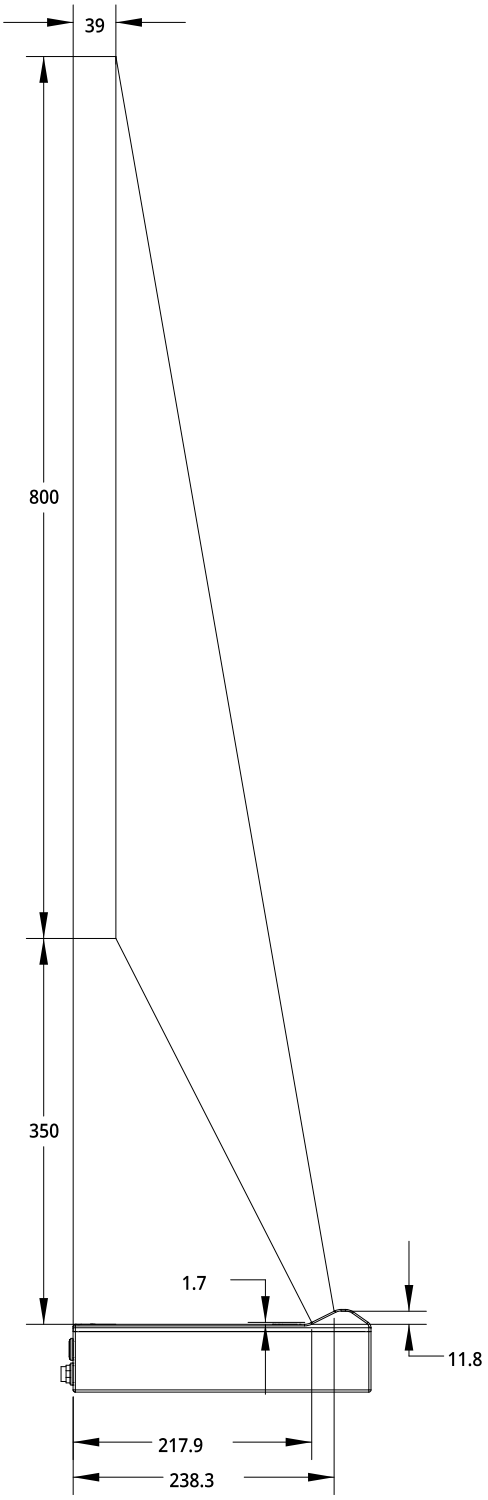


Gocator 2400 Series

The Gocator 2400 series consists of the following models:

MODEL	2410	2420
Data Points / Profile	1710	1940
Linearity Z (+/- % of MR)	0.005	0.006
Resolution Z (µm)	1.1	1.8 - 3.0
Resolution X (µm) (Profile Data Interval)	5.8 - 6.2	14.0 - 16.5
Repeatability Z (µm)	0.2	0.4
Clearance Distance (CD) (mm)	19	60
Measurement Range (MR) (mm)	6	25
Field of View (FOV) (mm)	9.6 - 10.6	27 - 32
Recommended Laser Class	3R (blue, 405 nm)	3R (blue, 405 nm)
Other Laser Classes	2M (blue, 405 nm)	2M (blue, 405 nm)
Dimensions (mm)	44x90x145	44x90x145
Weight (kg)	0.88	0.88

The following diagram illustrates some of the terms used in the table above.

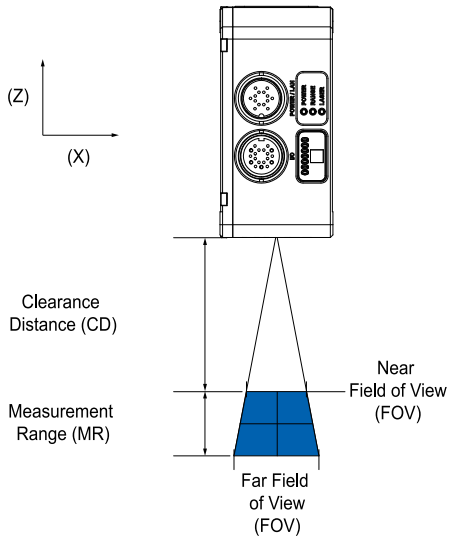

Optical models, laser classes, and packages can be customized. Contact LMI for more details.

Specifications stated are based on standard laser classes. Linearity Z, Resolution Z, and Repeatability Z may vary for other laser classes.

All specification measurements are performed on LMI's standard calibration target (a diffuse, painted white surface).

Linearity Z is the worst case difference in average height measured, compared to the actual position over the measurement range.

Resolution Z is the maximum variability of height measurements across multiple frames, with 95% confidence.

Resolution X is the distance between data points along the laser line.

Repeatability Z is measured with a flat target at the middle of the measurement range. It is the 95% confidence variation of the average height over 4096 frames. Height values are averaged over the full FOV.


See *Resolution and Accuracy* on page 43 for more information.

ALL 2400 SERIES MODELS	
Scan Rate	200 Hz (expanded full window), 400 Hz (G23xx equivalent full window), up to 5 kHz
Interface	Gigabit Ethernet
Inputs	Differential Encoder, Laser Safety Enable, Trigger
Outputs	2x Digital output, RS-485 Serial (115 kBaud), 1x Analog Output (4 - 20 mA)
Housing	Gasketed aluminum enclosure, IP67
Input Voltage (Power)	+24 to +48 VDC (9 W); Ripple +/- 10%
Operating Temp.	0 to 50° C
Storage Temp.	-30 to 70° C


Mechanical dimensions, CD/FOV/MR, and the envelope for each sensor model are illustrated on the following pages.

Gocator 2410


Field of View / Measurement Range

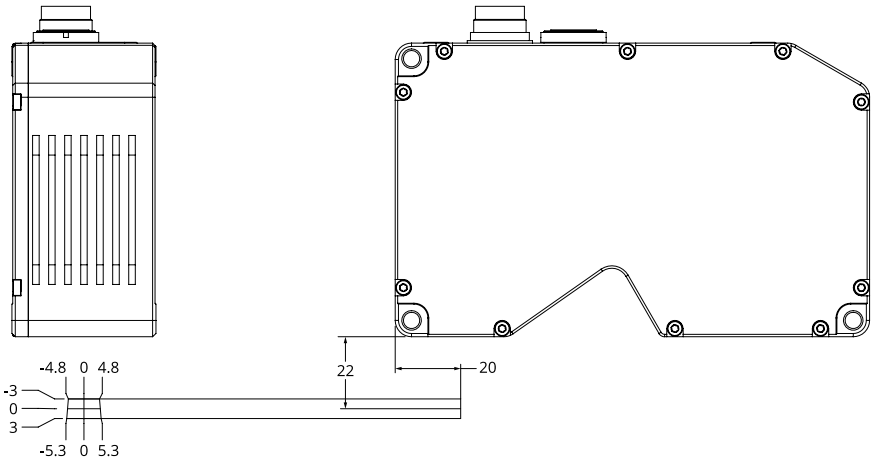

Dimensions

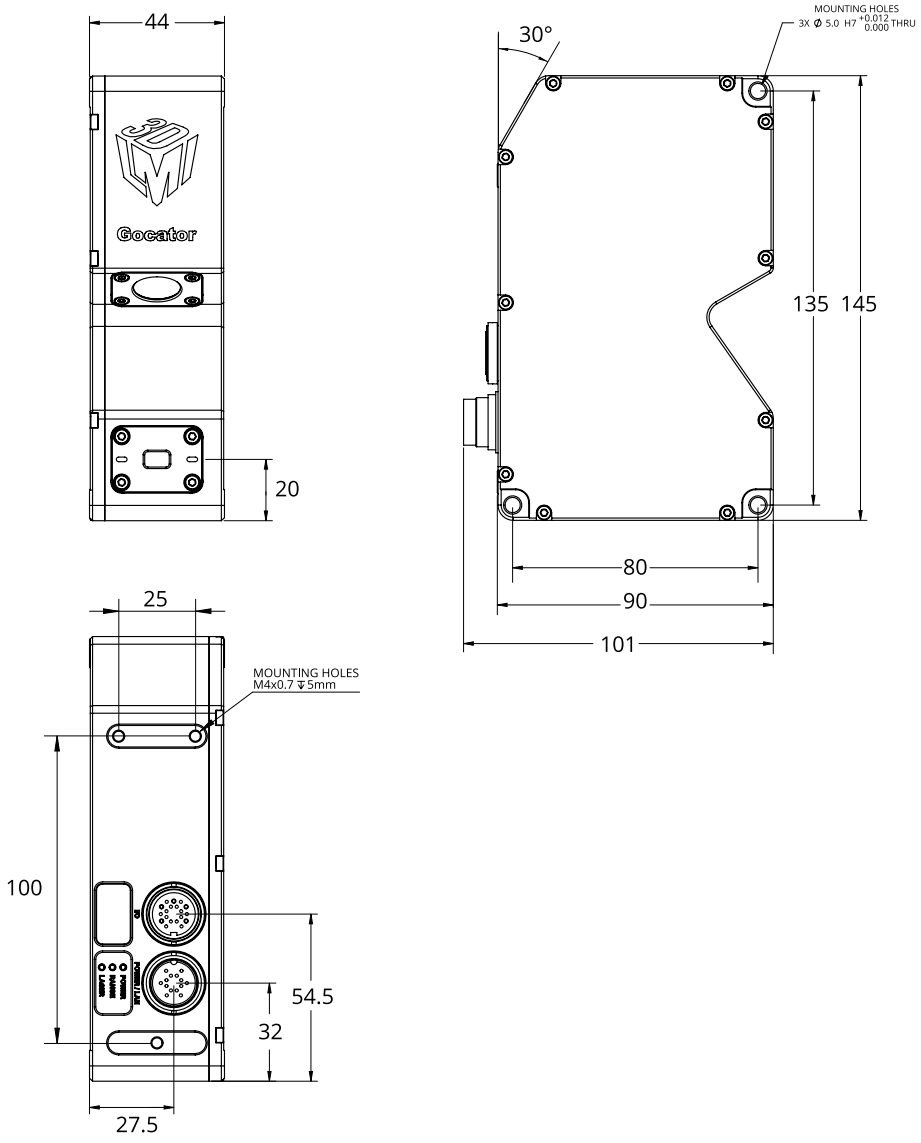

44
Gocator
20
30°
MOUNTING HOLES
3X Ø 5.0 H7 +0.012 0.000 THRU
135
145
80
90
101
25
MOUNTING HOLES
M4x0.7 ↧5mm
100
54.5
32
27.5

Envelope

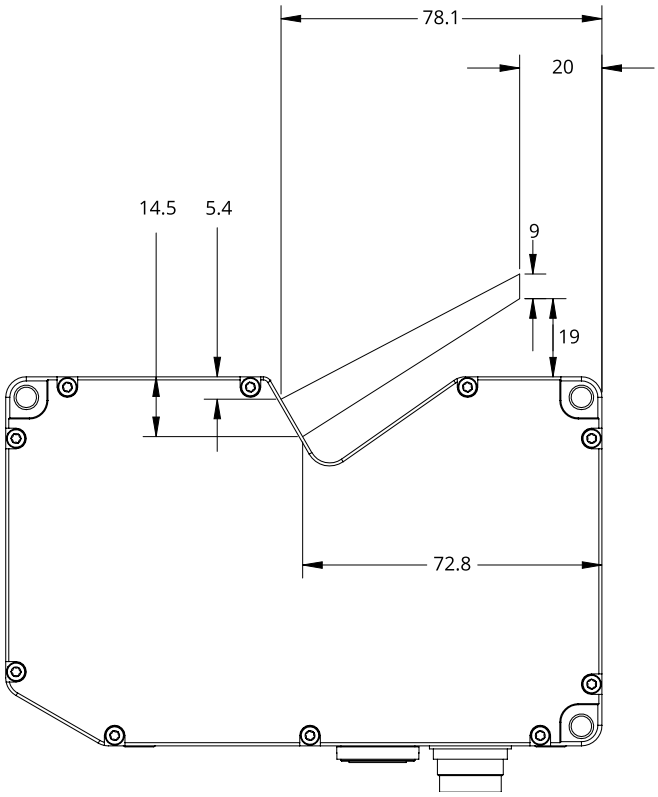


Gocator 2420


Field of View / Measurement Range

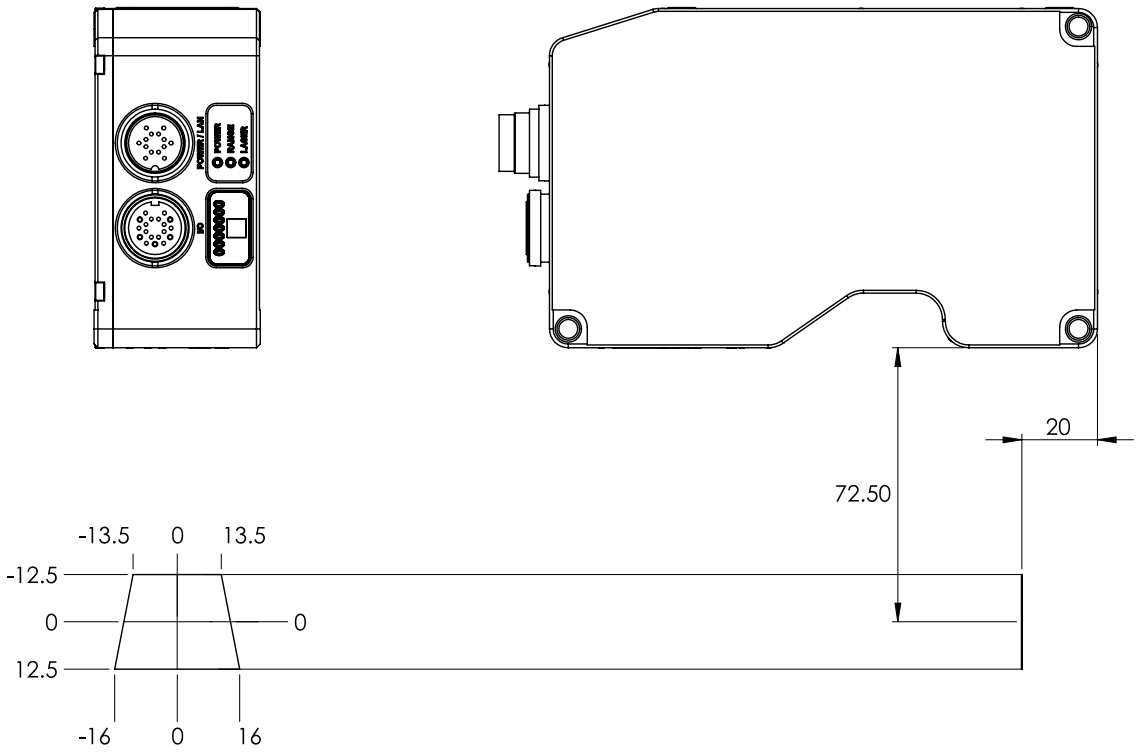

Dimensions

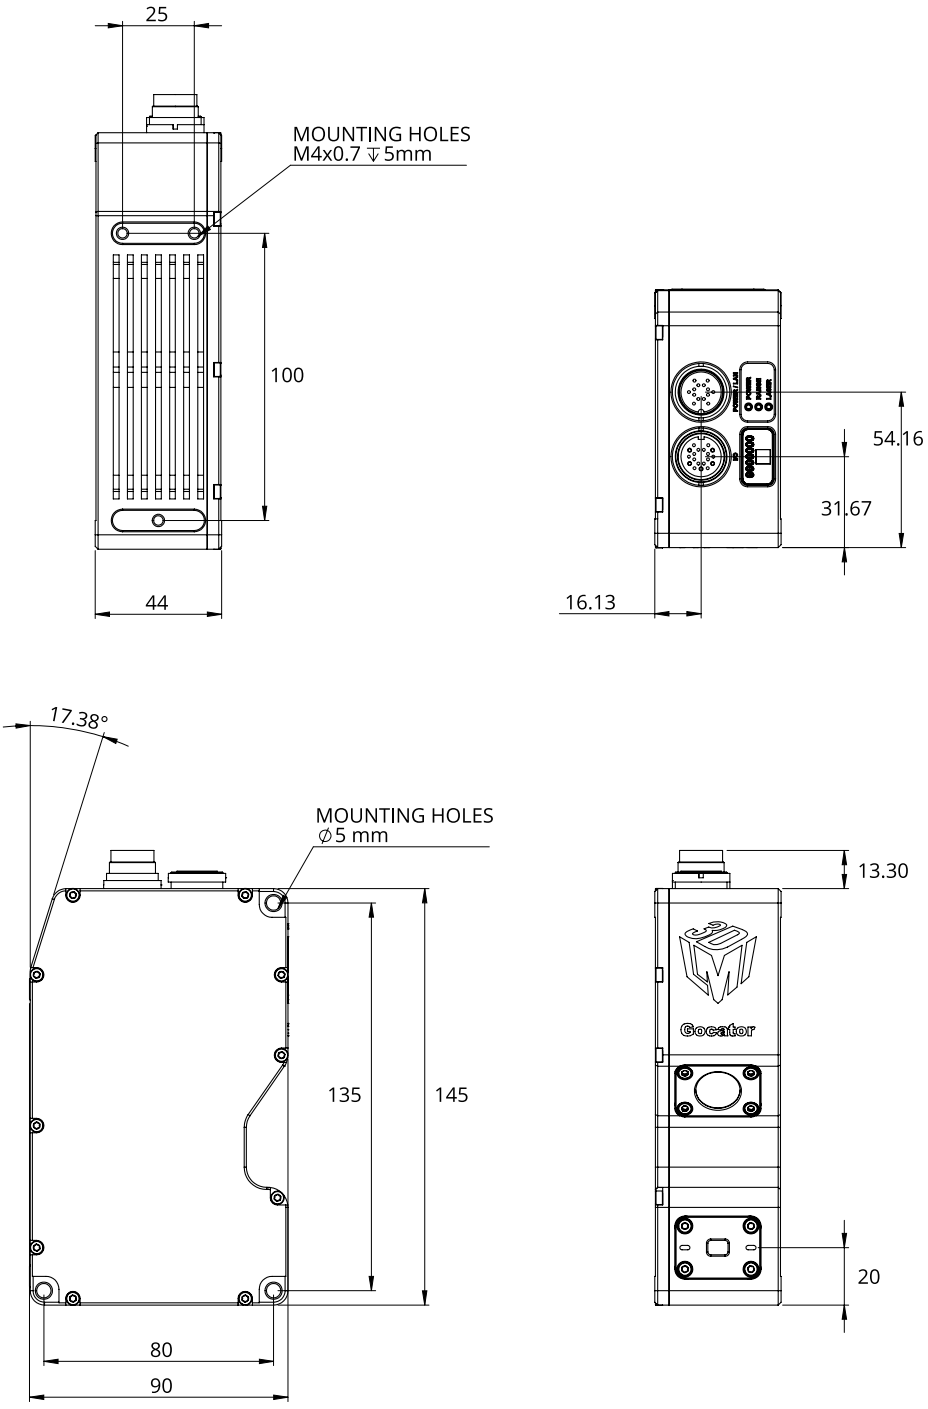
25
MOUNTING HOLES
M4x0.7 ↧5mm
100
44
54.16
31.67
16.13
17.38°
MOUNTING HOLES
⌀5 mm
135
145
80
90
13.30
Gocator
20

Envelope

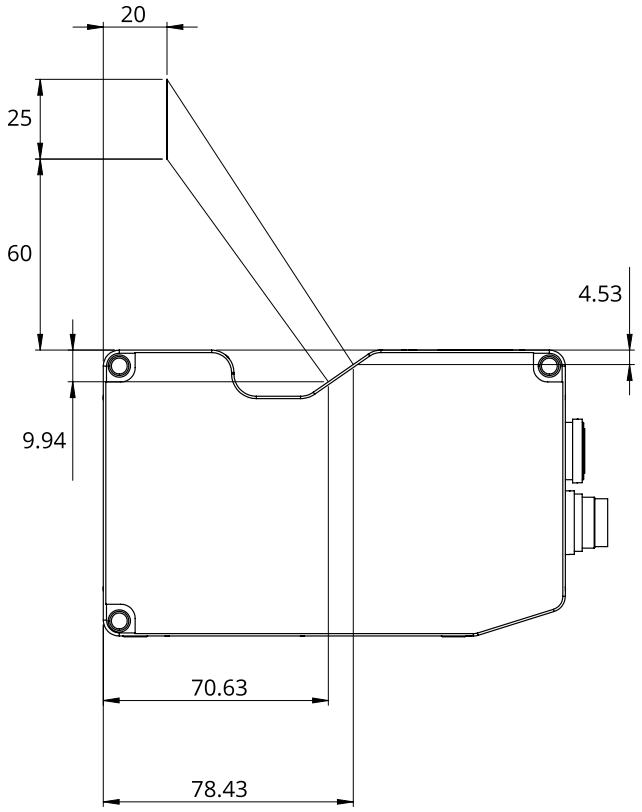

Gocator 2880 Sensor

The Gocator 2880 is defined below.

MODEL	2880
Data Points / Profile	1280
Linearity Z (+/- % of MR)	0.04
Resolution Z (mm)	0.092 - 0.488
Resolution X (mm)	0.375 - 1.1
Clearance Distance (CD) (mm)	350
Measurement Range (MR) (mm)	800
Field of View (FOV) (mm)	390 - 1260
Recommended Laser Class	3B
Dimensions (mm)	49x75x498
Weight (kg)	1.3
Scan Rate	Approx. 170Hz to 5000 Hz
Interface	Gigabit Ethernet
Inputs	Differential Encoder, Laser Safety Enable, Trigger
Outputs	2x Digital output, RS-485 Serial (115 kBaud), 1x Analog Output (4 - 20 mA)
Input Voltage (Power)	+24 to +48 VDC (13 Watts); RIPPLE +/- 10%
Housing	Gasketed aluminum enclosure, IP67
Operating Temp.	0 to 50 °C
Storage Temp.	-30 to 70 °C


Optical models, laser classes, and packages can be customized. Contact LMI for more details.

Specifications stated are based on standard laser classes. Resolution Z and Linearity Z may vary for other laser classes.


Mechanical dimensions, CD/FOV/MR, and the envelope for each sensor model are illustrated on the following pages.

Gocator 2880


Field of View / Measurement Range

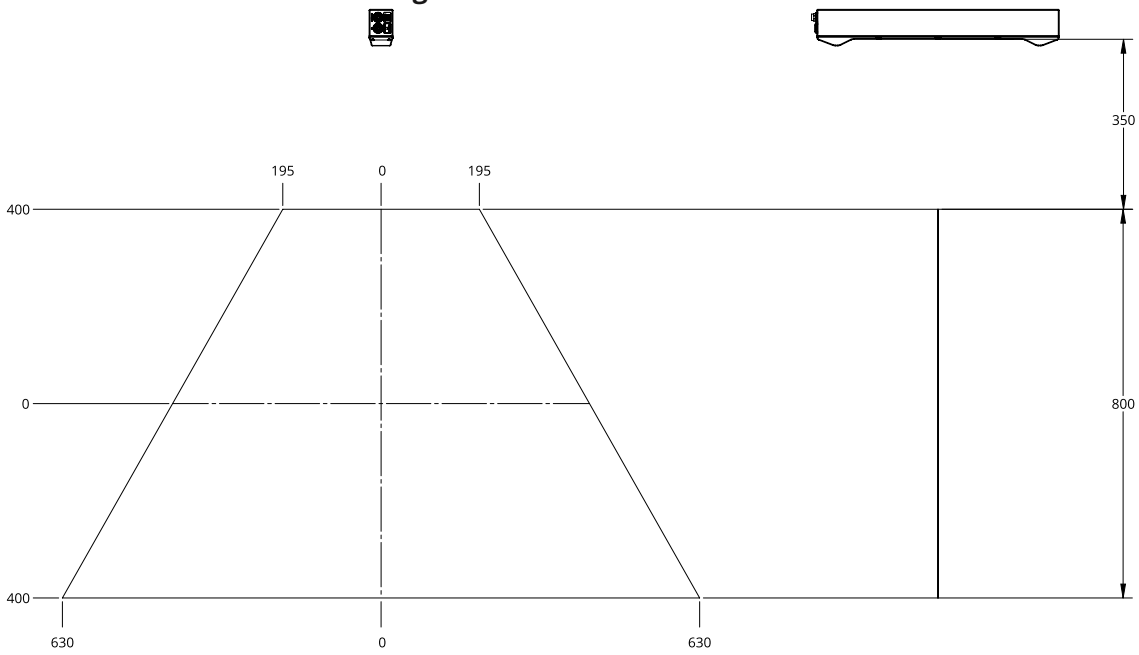

Dimensions

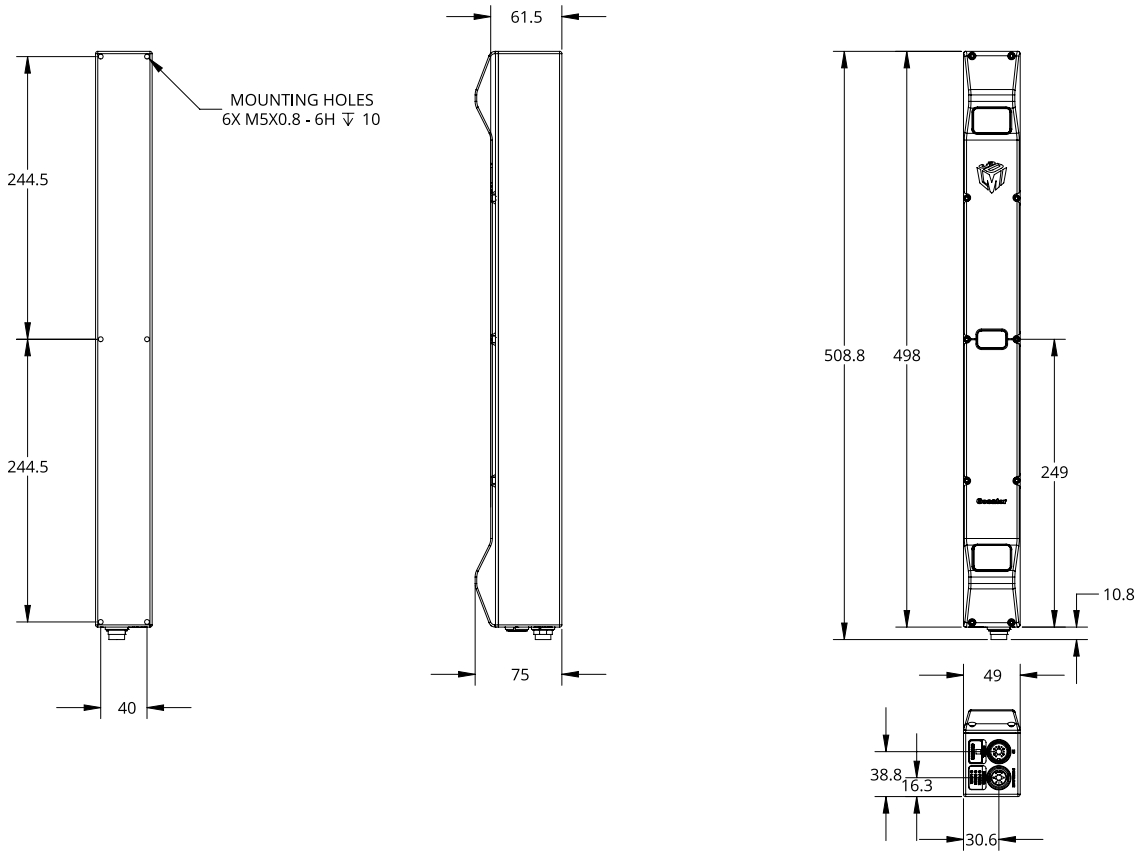

Envelope

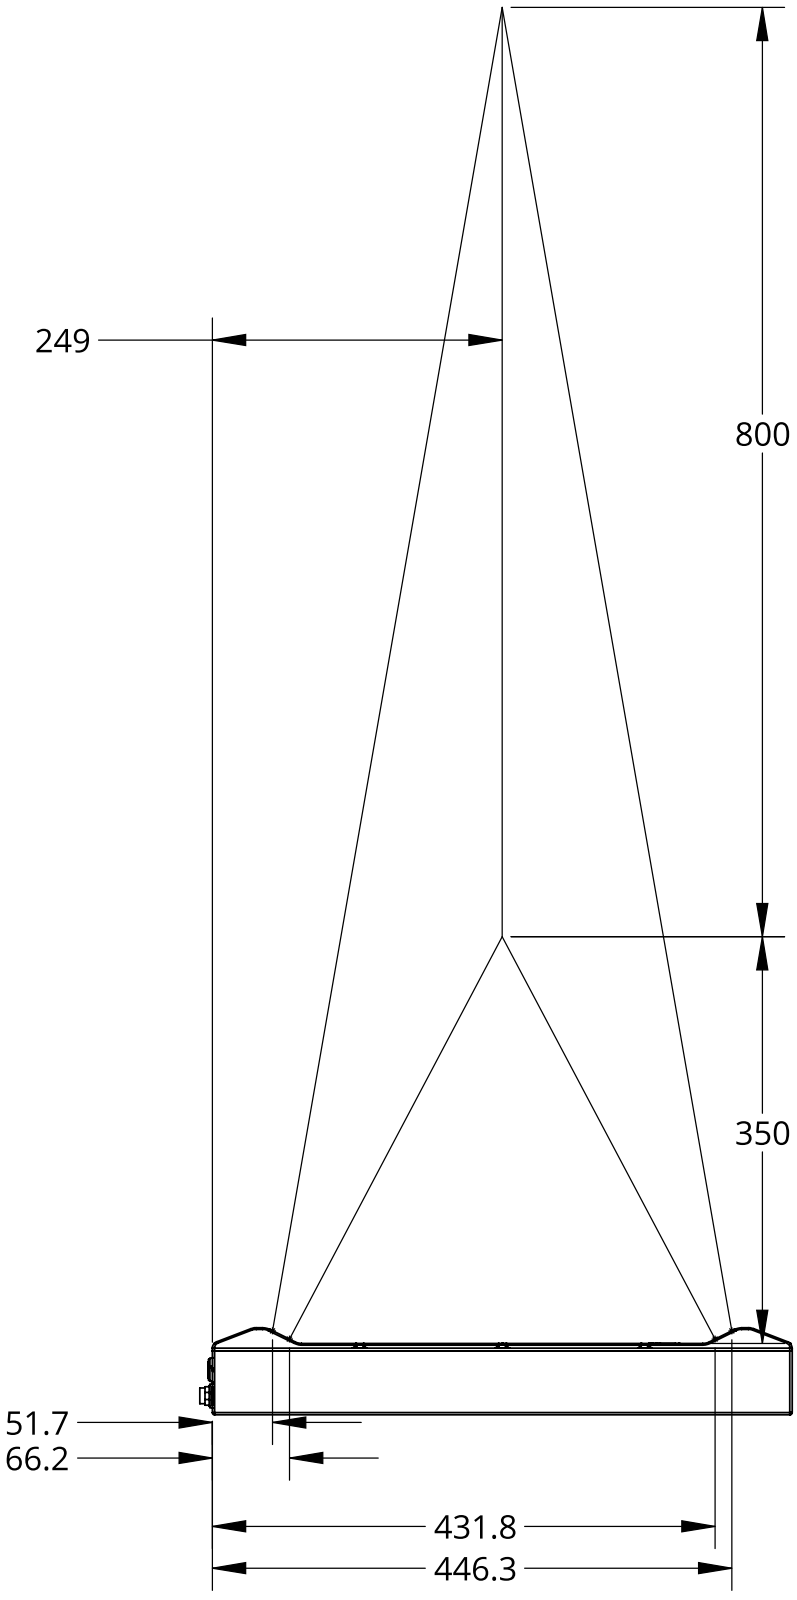

Gocator Power/LAN Connector


The Gocator Power/LAN connector is a 14 pin, M16 style connector that provides power input, laser safety input and Ethernet.

> This connector is rated IP67 only when a cable is connected or when a protective cap is used.

This section defines the electrical specifications for Gocator Power/LAN Connector pins, organized by function.

Gocator Power/LAN Connector Pins

Function	Pin	Lead Color on Cordset
GND_24-48V	L	White/ Orange & Black
GND_24-48V	L	Orange/ Black
DC_24-48V	A	White/ Green & Black
DC_24-48V	A	Green/ Black
Safety-	G	White/ Blue & Black
Safety+	J	Blue/ Black
Sync+	E	White/ Brown & Black
Sync-	C	Brown/ Black
Ethernet MX1+	M	White/ Orange
Ethernet MX1-	N	Orange
Ethernet MX2+	O	White/ Green
Ethernet MX2-	P	Green
Ethernet MX3-	S	White/ Blue
Ethernet MX3+	R	Blue
Ethernet MX4+	T	White/ Brown
Ethernet MX4-	U	Brown



*View: Looking into the connector **on** the sensor*

Two wires are connected to the ground and power pins.

Grounding Shield

The grounding shield should be mounted to the earth ground.

Power

Apply positive voltage to DC_24-48V. See *Gocator 2100 & 2300 Series* on page 434 or *Gocator 2400 Series* on page 452 for the sensor's power requirement. Apply ground to GND_24-48VDC.

Power requirements

Function	Pins	Min	Max
DC_24-48V	A	24 V	48 V
GND_24-48VDC	L	0 V	0 V

Laser Safety Input

The Safety_in+ signal should be connected to a voltage source in the range listed below. The Safety_in- signal should be connected to the ground/common of the source supplying the Safety_in+.

Laser safety requirements

Function	Pins	Min	Max
Safety_in+	J	24 V	48 V
Safety_in-	G	0 V	0 V

⚠ Confirm the wiring of Safety_in- before starting the sensor. Wiring DC_24-48V into Safety_in- may damage the sensor.

Gocator I/O Connector


The Gocator I/O connector is a 19 pin, M16 style connector that provides encoder, digital input, digital outputs, serial output, and analog output signals.

> This connector is rated IP67 only when a cable is connected or when a protective cap is used.

This section defines the electrical specifications for Gocator I/O connector pins, organized by function.

Gocator I/O Connector Pins

Function	Pin	Lead Color on Cordset
Trigger_in+	D	Grey
Trigger_in-	H	Pink
Out_1+ (Digital Output 0)	N	Red
Out_1- (Digital Output 0)	O	Blue
Out_2+ (Digital Output 1)	S	Tan
Out_2- (Digital Output 1)	T	Orange
Encoder_A+	M	White / Brown & Black
Encoder_A-	U	Brown / Black
Encoder_B+	I	Black
Encoder_B-	K	Violet
Encoder_Z+	A	White / Green & Black
Encoder_Z-	L	Green / Black
Serial_out+	B	White
Serial_out-	C	Brown
Reserved	E	Blue / Black
Reserved	G	White / Blue & Black
Analog_out+	P	Green
Analog_out-	F	Yellow & Maroon / White
Reserved	R	Maroon

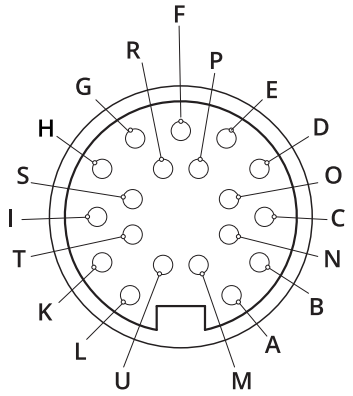

*View: Looking into the connector **on** the sensor*

Grounding Shield


The grounding shield should be mounted to the earth ground.

Digital Outputs

Each Gocator sensor has two optically isolated outputs. Both outputs are open collector and open emitter, this allows a variety of power sources to be connected and a variety of signal configurations.

Out_1 (Collector – Pin N and Emitter – Pin O) and Out_2 (Collector – Pin S and Emitter Pin T) are independent and therefore V+ and GND are not required to be the same.

Function	Pins	Max Collector Current	Max Collector–Emitter Voltage	Min Pulse Width
Out_1	N, O	40 mA	70 V	20 us
Out_2	S, T	40 mA	70 V	20 us

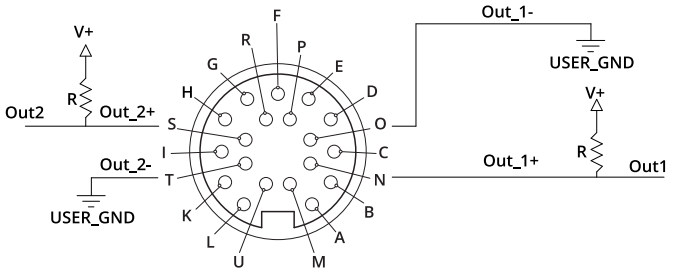


The resistors shown above are calculated by R = (V+) / 2.5 mA.

The size of the resistors is determined by power = (V+)^2 / R.


Inverting Outputs

To invert an output, connect a resistor between ground and Out_1- or Out_2- and connect Out_1+ or Out_2+ to the supply voltage. Take the output at Out_1- or Out_2-. The resistor selection is the same as what is shown above.

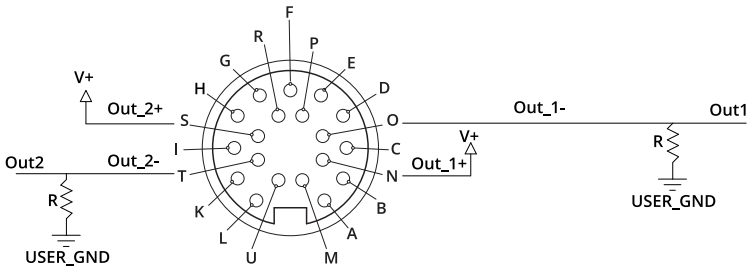


Digital Inputs

Every Gocator sensor has a single optically isolated input. To use this input without an external resistor, supply 3.3 - 24 V to Pin D and GND to Pin H.

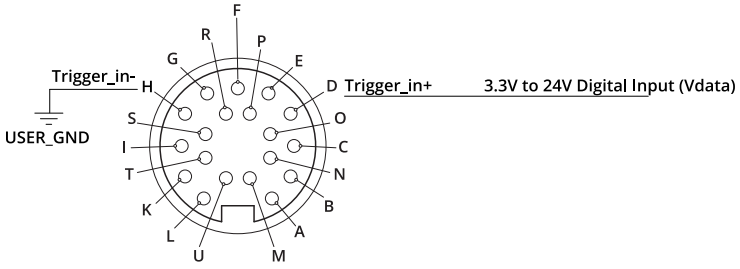

Active High

If the supplied voltage is greater than 24 V, connect an external resistor in series to Pin D. The resistor value should be R = [(Vin-1.2V)/10mA]-680.

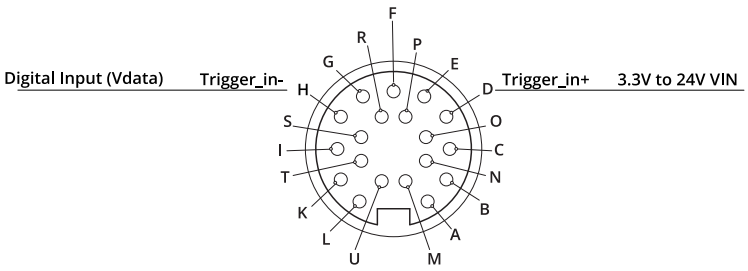


Active Low

To assert the signal, the digital input voltage should be set to draw a current of 3 mA to 40 mA from Trigger_In+. The current that passes through Trigger_In+ is I = (Vin – 1.2 – Vdata) / 680. To reduce noise sensitivity, we recommend leaving a 20% margin for current variation (i.e., uses a digital input voltage that draws 4mA to 25mA).

Function	Pins	Min Voltage	Max Voltage	Min Current	Max Current	Min Pulse Width
Trigger_in	D, H	3.3 V	24 V	3 mA	40 mA	20 us

Encoder Input

Encoder input is provided by an external encoder and consists of three RS-485 signals. These signals are connected to Encoder_A, Encoder_B, and Encoder_Z.

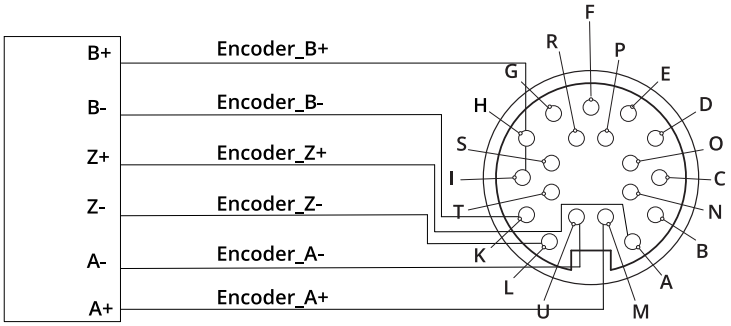

Function	Pins	Common Mode Voltage		Differential Threshold Voltage			Max Data Rate
		Min	Max	Min	Typ	Max	
Encoder_A	M, U	-7 V	12 V	-200 mV	-125 mV	-50 mV	1 MHz
Encoder_B	I, K	-7 V	12 V	-200 mV	-125 mV	-50 mV	1 MHz
Ecnoder_Z	A, L	-7 V	12 V	-200 mV	-125 mV	-50 mV	1 MHz


Gocator only supports differential RS485 signalling. Both + and - signals must be connected.

Encoders are normally specified in *pulses* per revolution, where each pulse is made up of the four quadrature *signals* (A+ / A- / B+ / B-). Because Gocator reads each of the four quadrature signals, you should choose an encoder accordingly, given the resolution required for your application.

Serial Output

Serial RS-485 output is connected to Serial_out as shown below.


Function	Pins
Serial_out	B, C

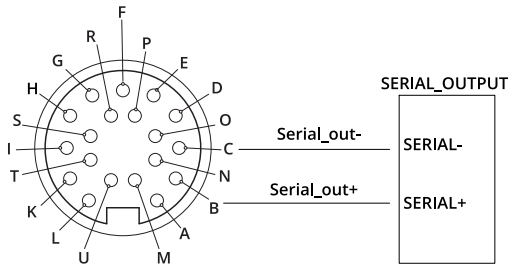


Analog Output

The Sensor I/O Connector defines one analog output interface: Analog_out.

Function	Pins	Current Range
Analog_out	P, F	4 – 20 mA

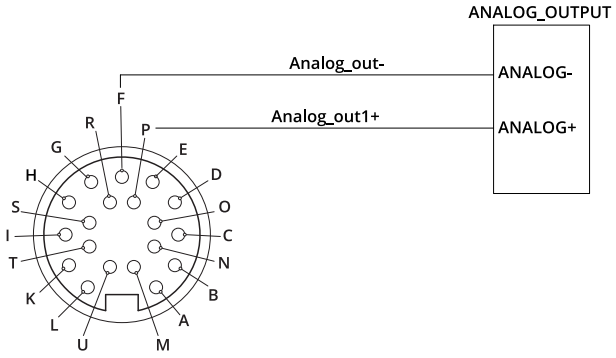


Current Mode

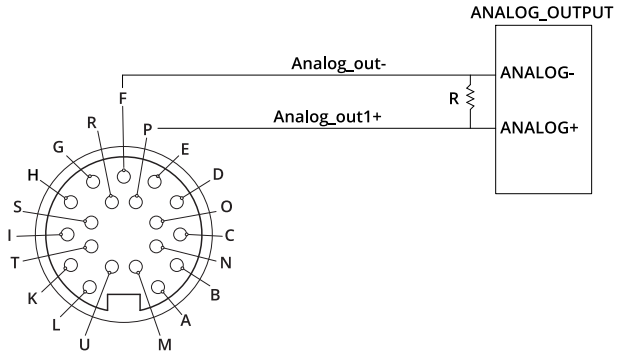


Voltage Mode

To configure for voltage output, connect a 500 Ohm ¼ Watt resistor between Analog_out+ and Analog_out- and measure the voltage across the resistor. To reduce the noise in the output, we recommend using an RC filter as shown below.

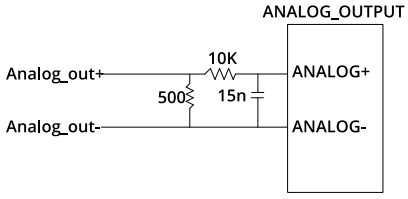

Master 100

The Master 100 accepts connections for power, safety, and encoder, and provides digital output.

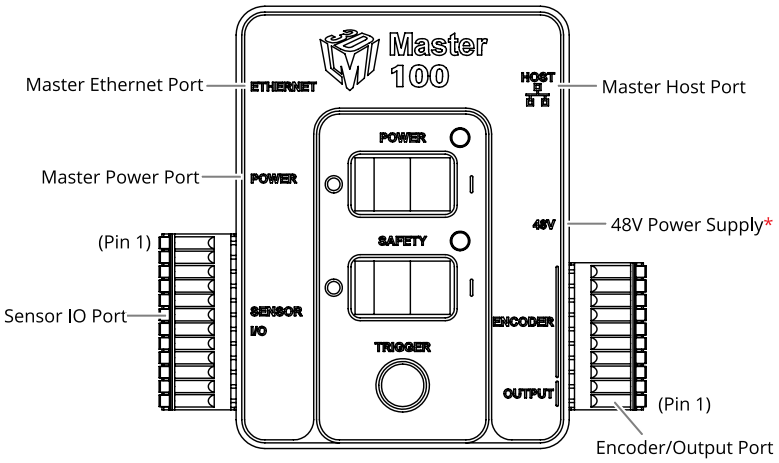

*Contact LMI for information regarding this type of power supply.

Connect the Master Power port to the Gocator's Power/LAN connector using the Gocator Power/LAN to Master cordset. Connect power RJ45 end of the cordset to the Master Power port. The Ethernet RJ45 end of the cordset can be connected directly to the Ethernet switch, or connect to the Master Ethernet port. If the Master Ethernet port is used, connect the Master Host port to the Ethernet switch with a CAT5e Ethernet cable.

To use encoder and digital output, wire the Master's Gocator Sensor I/O port to the Gocator IO connector using the Gocator I/O cordset.

Sensor I/O Port Pins


Gocator I/O Pin	Master Pin	Conductor Color
Encoder_A+	1	White/Brown & Black
Encoder_A-	2	Brown/Black
Encoder_Z+	3	White/Green & Black
Encoder_Z-	4	Green/Black
Trigger_in+	5	Grey
Trigger_in-	6	Pink
Out_1-	7	Blue
Out_1+	8	Red
Encoder_B+	11	Black
Encoder_B-	12	Violet

The rest of the wires in the Gocator I/O cordset are not used.

Encoder/Output Port Pins


Function	Pin
Output_1+ (Digital Output 0)	1
Output_1- (Digital Output 0)	2
Encoder_Z+	3
Encoder_Z-	4
Encoder_A+	5
Encoder_A-	6
Encoder_B+	7
Encoder_B-	8
Encoder_GND	9
Encoder_5V	10

Master 100 Dimensions

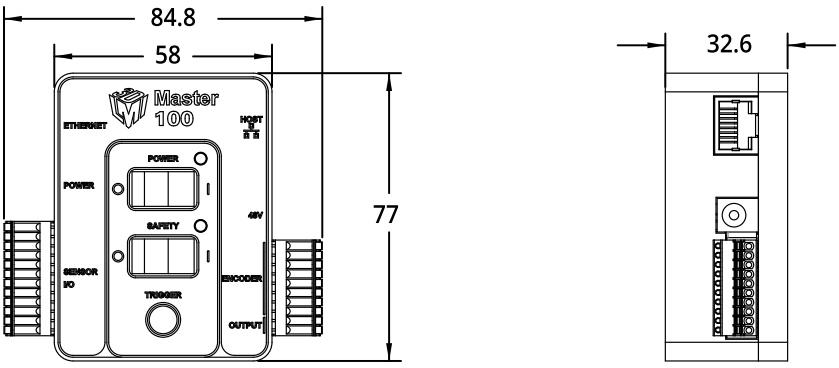

Master 400/800

The Master 400/800 provides sensor power and safety interlock, and broadcasts system-wide synchronization information (i.e., time, encoder count, encoder index, and digital I/O states) to all devices on a sensor network.

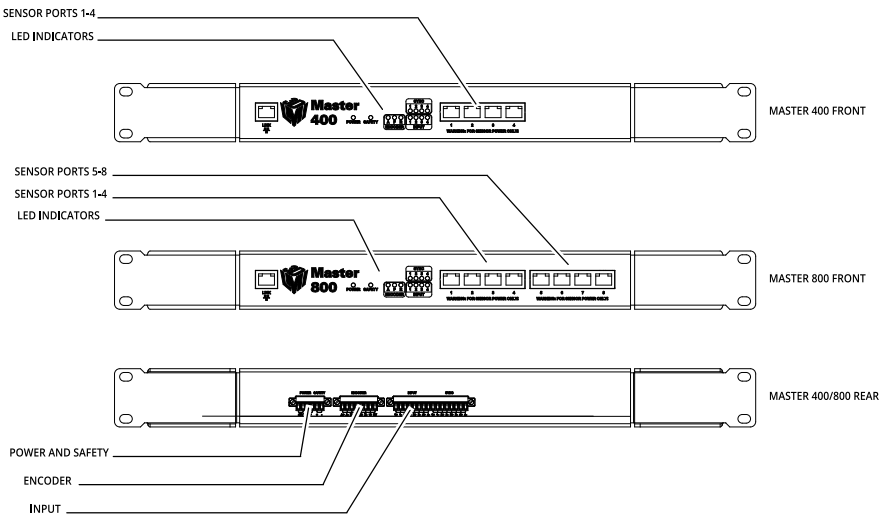

Power and Safety (6 pin connector)

Function	Pin
+48VDC	1
+48VDC	2
GND(48VDC)	3
GND(48VDC)	4
Safety Control+	5
Safety Control–	6

The +48VDC power supply must be isolated from AC ground. This means that AC ground and DC ground are not connected.

The Safety Control requires a voltage differential 12VDC to 48VDC across the pin to enable the laser.

Digital Input (16 pin connector)

Function	Pin
Input 1	1
Input 1 GND	2
Reserved	3
Reserved	4
Reserved	5

Function	Pin
Reserved	6
Reserved	7
Reserved	8
Reserved	9
Reserved	10
Reserved	11
Reserved	12
Reserved	13
Reserved	14
Reserved	15
Reserved	16



This connector does not need to be wired up for proper operation.

Encoder (8 pin connector)

Function	Pin
Encoder_A+	1
Encoder_A-	2
Encoder_B+	3
Encoder_B-	4
Encoder_Z+	5
Encoder_Z-	6
GND	7
+5VDC	8

Master 400/800 Electrical Specifications

Electrical Specifications for Master 400/800

	Master 400 / 800
Power Supply Voltage	+48VDC
Power Supply current (Max.)	10A
Power Draw (Min.)	15W
Safety Voltage	+12 to +48VDC
Encoder signal voltage range	RS485 Differential
Digital input voltage range	Logical LOW: 0 VDC to +0.1VDC Logical HIGH: +11 VDC to +22.5VDC




When using a Master 400/800, its chassis must be well grounded.

☐	The +48VDC power supply must be isolated from AC ground. This means that AC ground and DC ground are not connected.

☐	The Power Draw specification is based on a Master with no sensors attached. Every sensor has its own power requirements which need to be considered when calculating total system power requirements.


Master 400/800 Dimensions

The dimensions of Master 400 and Master 800 are the same.

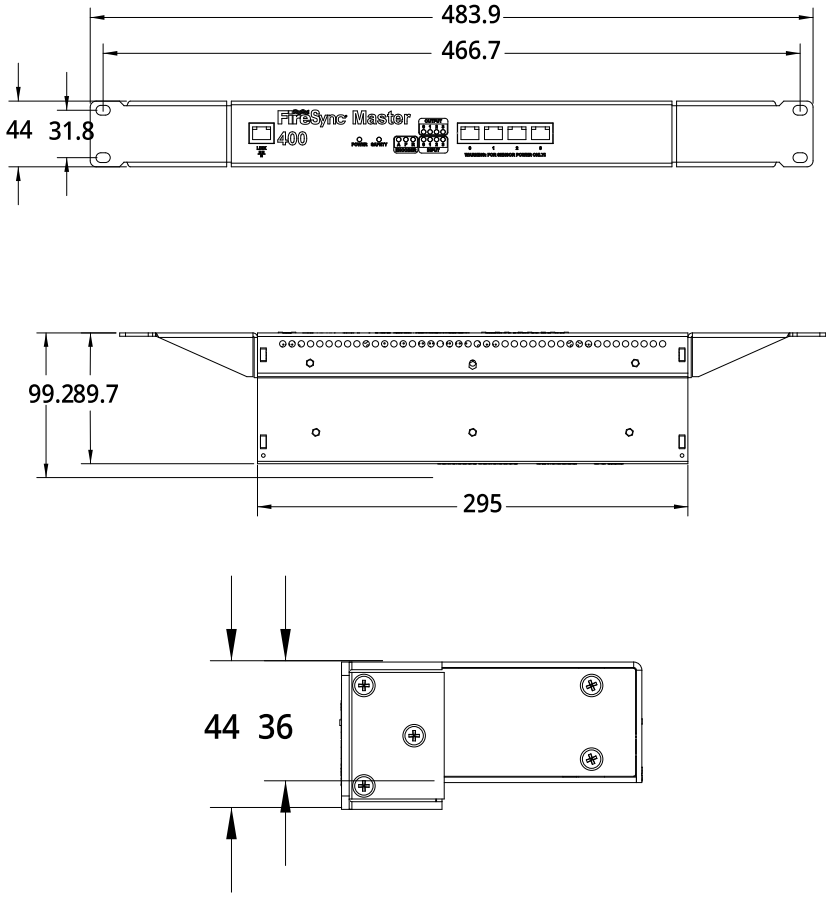

Master 1200/2400

The Master 1200/2400 provides sensor power and safety interlock, and broadcasts system-wide synchronization information (i.e., time, encoder count, encoder index, and digital I/O states) to all devices on a sensor network.

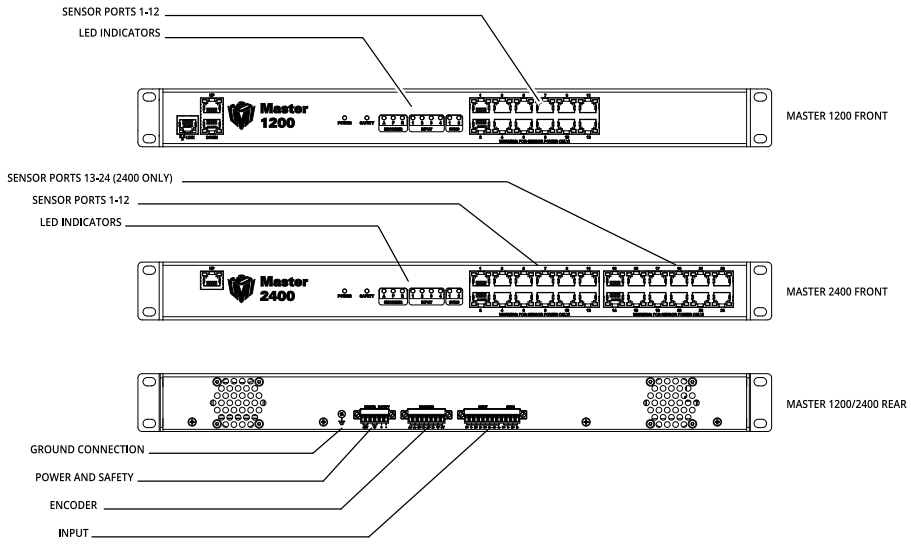

Power and Safety (6 pin connector)

Function	Pin
+48VDC	1
+48VDC	2
GND(48VDC)	3
GND(48VDC)	4
Safety Control+	5
Safety Control–	6

The +48VDC power supply must be isolated from AC ground. This means that AC ground and DC ground are not connected.

The Safety Control requires a voltage differential 12VDC to 48VDC across the pin to enable the laser.

Digital Input (16 pin connector)

Function	Pin
Input 1	1
Input 1 GND	2
Reserved	3
Reserved	4

Function	Pin
Reserved	5
Reserved	6
Reserved	7
Reserved	8
Reserved	9
Reserved	10
Reserved	11
Reserved	12

This connector does not need to be wired up for proper operation.

Encoder (8 pin connector)

Function	Pin
Encoder_A+	1
Encoder_A-	2
Encoder_B+	3
Encoder_B-	4
Encoder_Z+	5
Encoder_Z-	6
GND	7
+5VDC	8

Master 1200/2400 Electrical Specifications

Electrical Specifications for Master 1200/2400

	Master 1200 / 2400
Power Supply Voltage	+48VDC
Power Supply current (Max.)	10A
Power Draw (Min.)	15W
Safety Voltage	+12 to +48VDC
Encoder signal voltage range	RS485 Differential
Digital input voltage range	Logical LOW: 0 VDC to +0.1VDC Logical HIGH: +3.5 VDC to +6.5VDC


When using a Master 1200/2400, its chassis must be well grounded.

The +48VDC power supply must be isolated from AC ground. This means that AC ground and DC ground are not connected.

The Power Draw specification is based on a Master with no sensors attached. Every sensor has its own power requirements which need to be considered when calculating total system power requirements.

Master 1200/2400 Dimensions

The dimensions of Master 1200 and Master 2400 are the same.

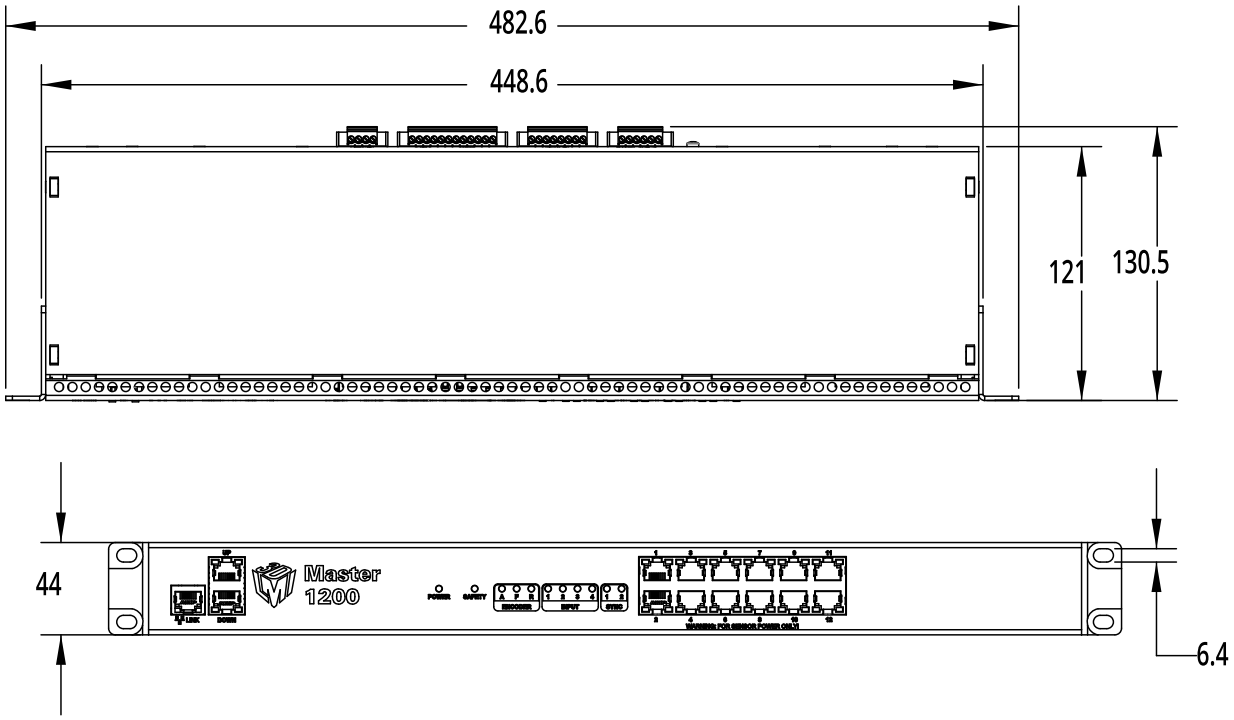

Accessories

Masters

Description	Part Number
Master 100 - for single sensor (development only)	30705
Master 400 - for networking up to 4 sensors	30680
Master 800 - for networking up to 8 sensors	30681
Master 1200 - for networking up to 12 sensors	30649
Master 2400 - for networking up to 24 sensors	30650

Cordsets

Description	Part Number
2m I/O cordset, open wire end	30864-2m
5m I/O cordset, open wire end	30862
10m I/O cordset, open wire end	30863
15m I/O cordset, open wire end	30864-15m
20m I/O cordset, open wire end	30864-20m
25m I/O cordset, open wire end	30864-25m
2m Power and Ethernet cordset, 1x open wire end, 1x RJ45 end	30861-2m
5m Power and Ethernet cordset, 1x open wire end, 1x RJ45 end	30859
10m Power and Ethernet cordset, 1x open wire end, 1x RJ45 end	30860
15m Power and Ethernet cordset, 1x open wire end, 1x RJ45 end	30861-15m
20m Power and Ethernet cordset, 1x open wire end, 1x RJ45 end	30861-20m
25m Power and Ethernet cordset, 1x open wire end, 1x RJ45 end	30861-25m
2m Power and Ethernet to Master cordset, 2x RJ45 ends	30858-2m
5m Power and Ethernet to Master cordset, 2x RJ45 ends	30856
10m Power and Ethernet to Master cordset, 2x RJ45 ends	30857
15m Power and Ethernet to Master cordset, 2x RJ45 ends	30858-15m
20m Power and Ethernet to Master cordset, 2x RJ45 ends	30858-20m
25m Power and Ethernet to Master cordset, 2x RJ45 ends	30858-25m

Accessories

Description	Part Number
Calibration Disk, 40mm	30727
Calibration Disk, 100mm	30728

Contact LMI for information on creating cordsets with custom length or connector orientation. The maximum cordset length is 60 m.

Return Policy

Return Policy
Before returning the product for repair (warranty or non-warranty) a Return Material Authorization (RMA) number must be obtained from LMI. Please call LMI to obtain this RMA number.

Carefully package the sensor in its original shipping materials (or equivalent) and ship the sensor prepaid to your designated LMI location. Please ensure that the RMA number is clearly written on the outside of the package. Inside the return shipment, include the address you wish the shipment returned to, the name, email and telephone number of a technical contact (should we need to discuss this repair), and details of the nature of the malfunction. For non-warranty repairs, a purchase order for the repair charges must accompany the returning sensor.

LMI Technologies Inc. is not responsible for damages to a sensor that are the result of improper packaging or damage during transit by the courier.

Software Licenses

Pico-C

Website:

http://code.google.com/p/picoc/

License:

picoc is published under the "New BSD License".

http://www.opensource.org/licenses/bsd-license.php

Copyright (c) 2009-2011, Zik Saleeba

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of the Zik Saleeba nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

BlowFish

Website:

http://www.chiark.greenend.org.uk/~sgtatham/putty/licence.html

License:

PuTTY is copyright 1997-2011 Simon Tatham.

Portions copyright Robert de Bath, Joris van Rantwijk, Delian Delchev, Andreas Schultz, Jeroen Massar, Wez Furlong, Nicolas Barry, Justin Bradford, Ben Harris, Malcolm Smith, Ahmad Khalifa, Markus Kuhn, Colin Watson, and CORE SDI S.A.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL SIMON TATHAM BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

CodeMirror

Website:

http://codemirror.net

License:

Copyright (C) 2011 by Marijn Haverbeke <marijnh@gmail.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANT ABILITY,FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

jQuery

Website:

http://jquery.com/

License:

Copyright (c) 2011 John Resig, http://jquery.com/

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Closure Library

Website:

http://code.google.com/closure/library/index.html

License:

Copyright 2006 The Closure Library Authors. All Rights Reserved.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS-IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

jQuery.CopyEvents

Website:

http://brandonaaron.net

License:

Copyright (c) 2006 Brandon Aaron

Licensed under the MIT License (http://www.opensource.org/licenses/mit-license.php)

jQuery.history

License:

jQuery history plugin

Copyright (c) 2006 Taku Sano (Mikage Sawatari)

Licensed under the MIT License (http://www.opensource.org/licenses/mit-license.php)

Modified by Lincoln Cooper to add Safari support and only call the callback once during initialization for msie when no initial hash supplied. API rewrite by Lauris Bukis-Haberkorns

jQuery.mouseWheel

Website:

http://brandonaaron.net

License:

Copyright (c) 2010 Brandon Aaron

Licensed under the MIT License (http://www.opensource.org/licenses/mit-license.php)

jQuery.scaling

Website:

http://eric.garside.name

License:

Scaling 1.0 - Scale any page element

Copyright (c) 2009 Eric Garside

Licensed under the MIT License (http://www.opensource.org/licenses/mit-license.php)

jQuery.scrollFollow

Website:

http://kitchen.net-perspective.com/

License:

Copyright (c) 2008 Net Perspective

Licensed under the MIT License (http://www.opensource.org/licenses/mit-license.php)

Flex SDK

Website:

http://opensource.adobe.com/wiki/display/flexsdk/Flex+SDK

License:

Copyright (c) 2010 Adobe Systems Incorporated

The contents of this file are subject to the Mozilla Public License Version 1.1 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.mozilla.org/MPL/

Software distributed under the License is distributed on an "AS IS" basis, WITHOUT WARRANTY OF ANY KIND, either express or implied. See the License for the specific language governing rights and limitations under the License.

EtherNet/IP Communication Stack

Website:

sourceforge.net/projects/opener

License:

SOFTWARE DISTRIBUTION LICENSE FOR THE

ETHERNET/IP(TM) COMMUNICATION STACK (ADAPTED BSD STYLE LICENSE)

Copyright (c) 2009, Rockwell Automation, Inc. ALL RIGHTS RESERVED.

EtherNet/IP is a trademark of ODVA, Inc.

Support

For assistance regarding a component or product, please contact LMI Technologies.

World

Email	support@lmi3D.com
Web	http://www.lmi3D.com

North America

Phone	+1 604 636 1011
Fax	+1 604 516 8368

Europe

Phone	+31 45 850 7000
Fax	+31 45 574 2500

For more information on safety and laser classifications, please contact:

U.S. Food and Drug Administration
Center for Devices and Radiological Health
WO66-G609
10903 New Hampshire Avenue
Silver Spring, MD 20993-0002
USA

Contact

Americas	EMEAR	ASIA PACIFIC
LMI Technologies (Head Office)	LMI Technologies GmbH	LMI (Shanghai) Trading Co., Ltd.
Vancouver, Canada	Berlin, Germany	Shanghai, China
+1 604 636 1011	+49 (0)3328 9360 0	+86 21 5441 0711

LMI Technologies has sales offices and distributors worldwide. All contact information is listed at lmi3D.com/contact/locations.